

Manual No. '08 • PAC-T-118 updated 3,October,2008

TECHNICAL MANUAL Collection data

PACKAGED AIR-CONDITIONER

(Split system, Air to air heat pump type)

CEILING CASSETTE-4 WAY COMPACT (600×600mm)-TYPE FDTC40ZHXV FDTC71VNPV FDTC140VNTV

FDTC40ZHXV	FI
50ZHXV	

140VSV

250VS

E

C71VNPV FDTC140VNTV 100VNPV 140VSTV 100VSPV

CEILING CASSETTE-4 WAY TYPE

FDT140VNTV	FDT71VNPV	DT40ZHXV
140VSTV	100VNPV	50ZHXV
200VSTV	100VSPV	60ZHXV
	125VNPV	71VNV
FDT200VSDV	125VSPV	100VNV
250VSDV	140VNPV	100VSV
	140VSPV	125VNV
	200VSPV	125VSV
	250VSPV	140VNV

CEILING SUSPENDED TYPE

	•••••••••••••••••••••••••••••••••••••••	
FDEN40ZHXV	FDEN71VNPV	FDEN140VNT\
50ZHXV	100VNPV	140VSTV
60ZHXV	100VSPV	200VSTV
71VNV	125VNPV	
100VNV	125VSPV	
100VSV	140VNPV	
125VNV	140VSPV	
125VSV	200VSPV	
140VNV	250VSPV	
140VSV		

DUCT CONNECTED-MIDDLE STATIC PRESSURE- TYPE

FDUM50ZHXV	FDUM100VNPV
60ZHXV	100VSPV
71VNV	125VNPV
100VNV	125VSPV
100VSV	140VNPV
125VNV	140VSPV
125VSV	200VSPV
140VNV	250VSPV
140VSV	

FDUM140VNTV 140VSTV 200VSTV

DUCT CONNECTED-HIGH STATIC PRESSURE- TYPE

FDU71VNV 100VNV 100VSV 125VNV 125VSV 140VNV 140VSV 200VSV 250VSV

MULTI-TYPE (V-MULTI)

PACKAGED AIR-CONDITIONER

FDC71VN	FDTC40V	FDT40V	FDEN40V	FDUM50V
100VN	50V	50V	50V	60V
100VS		60V	60V	71V
125VN		71V	71V	100V
125VS		100V	100V	125V
140VN		125V	125V	
140VS				
200VS				



TABLE OF CONTENTS

1. PACKAGED AIR-CONDITIONER	2
2. MULTI-TYPE (V MULTI) PACKAGED AIR-CONDITIONER	
3. WIRELESS KIT (OPTIONAL PARTS)	

1. PACKAGED AIR-CONDITIONER

CONTENTS

1.1	GE	INERAL INFORMATION	4
1	.1.1	Specific features	4
1	.1.2	How to read the model name	4
1.2	SE		5
1	.2.1	Specifications	5
	(1)	Ceiling cassette-4 way compact (600×600mm)-type (FDTC)	5
	(2)	Ceiling cassette-4 way-type (FDT)	12
		Ceiling suspended type (FDEN)	
	(4)	Duct connected-Middle static pressure-type (FDUM)	58
	(5)	Duct connected-High static pressure-type (FDU)	78
1	.2.2	Range of usage & limitations	87
1	.2.3	Exterior dimensions	90
	(1)	Indoor unit	90
	(2)	Remote controller (Optional parts)	102
	(3)	Outdoor unit	104
1	.2.4	Exterior appearance	109
1	.2.5	Piping system	111
1	.2.6	Selection chart	118
1	.2.7	Characteristics of fan	130
1	.2.8	Noise level	136
	(1)	Indoor unit	136
	(2)	Outdoor unit	139
1.3	EL	ECTRICAL WIRING	140
	(1)	Indoor unit	140
	(2)	Outdoor unit	146
1.4	OU	JTLINE OF OPERATION CONTROL BY MICROCOMPUTER	151
	(1)	Remote controller	151
	(2)	Operation control function by the indoor controller	153
	(3)	Operation control function by the wired remote controller	161
	(4)	Operation control function by the outdoor controller	162

•	Models SRC40 ~ 60 models	.162
•	Models FDC71 ~ 250 models	.168
1.5 AP	PLICATION DATA	.178
1.5.1	Installation of indoor unit	.181
(1)	Ceiling cassette-4 way compact (600×600mm)-type (FDTC)	.181
(2)	Ceiling cassette-4 way-type (FDT)	.186
(3)	Ceiling suspended type (FDEN)	.197
(4)	Duct connected-Middle static pressure-type (FDUM)	. 201
(5)	Duct connected-High static pressure-type (FDU)	. 207
1.5.2	Installation of wired remote controller	.218
1.5.3	Installation of outdoor unit	.219
(1)	Haulage and installation	.219
(2)	Refrigerant piping work	. 221
(3)	Air tightness test and air purge	. 227
(4)	Additional refrigerant charge	. 228
(5)	Drain piping work	. 230
(6)	Electrical wiring work	. 230
(7)	Setting functions using the wired remote controller	. 233
(8)	Troubleshooting	.242
(9)	Test run (FDC71~250 only)	.243
1.6 MA		.245
1.6.1	Servicing	.245
1.6.2	Trouble shooting for refrigerant circuit	. 246
1.6.3	Diagnosing of microcomputer circuit	.247
(1)	Selfdiagnosis function	.247
(2)	Troubleshooting procedure	. 251
(3)	Troubleshooting at the indoor unit side	. 251
(4)	Troubleshooting at the outdoor unit side	. 255
(5)	Check of anomalous operation data with the remote controller	. 263
(6)	Inspection display of wireless specification model (FDEN, FDT)	. 264
(7)	Power transistor module (including the driver PCB) inspection procedure	. 265
(8)	Troubleshooting flow	. 266

1.1 GENERAL INFORMATION

1.1.1 Specific features

- (1) All models employ R410A, with RoHS compliance.
- (2) Industry leading COP.

Thanks to achievement of the highest COP level in the industry, the energy consumption has been cut by 39~49% compared with our former models (constant speed models).

(3) Energy labeling "Class A"

MHI models have cleared the class A standard, the highest energy saving level, with their high COP (coefficient of performance).

(4) The microcomputer chip is installed in the indoor unit and outdoor unit. There is no need for the unit to communicate between the outdoor and indoor units so the unit is more resistant to electromagnetic noise thus the incidence of microcomputer malfunction has been reduced. The compressor in the outdoor unit has its own self protection function, that reacts according to abnormal high pressure and excessive high temperature.

(5) Wide range of operation

Heating and cooling operation at -15° C Our new advanced technology has expanded the heating and cooling operation range. This permits installation of the units considering a heating and cooling operation under a low outdoor temperature condition down to -15° C.


(6) New remote control for all indoor units

Applying nonpolar 2-core in new remote control line, it is very convenient for installation including renewal case.

- (7) There are only three power lines between the outdoor and indoor unit. One cabtyre cable with 3 wires encased in one sheath is enough for conducting the wiring work between the outdoor unit and the indoor unit. This contributes to simpler wiring work in the field.
- (8) All air supply ports have auto swing louvers. (Only case of FDTC, FDT and FDEN models). The indoor fan motor has three speeds of high, medium and low.
- (9) All models have service valves protruding from the outdoor unit for faster flare connection (FDCVA802, 1002: Only a gas side is brazing) work in the field.
- (10) The size and weight of the outdoor units in the SRC40~60 and FDC71 Series have been greatly reduced. Use of an inverter has also improved energy conservation and economy.
- (11) Compared to the previous models, a single fan is used in the FDC100~140 outdoor unit models and forward blowing is used in the FDC200 and FDC250 models, resulting in markedly reduced weight and greater compactness. In addition, use of an inverter makes these units much more economical compared to the previous fixed speed units.

1.1.2 How to read the model name

Example: <u>FDT</u> <u>100 VN</u> <u>P</u> V

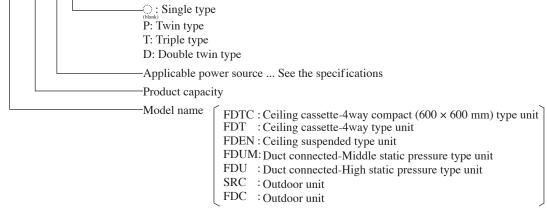

SELECTION DATA 1.2

1.2.1 Specifications

(1) Ceiling cassette-4way compact (600 × 600 mm) type (FDTC)

(a) Single type

Model FDTC40ZHXV

		Model		FDTC40	ZHXV		
Item			FDTC40		SRC40Z	/HX-S	
Nominal cooling capacity ⁽¹⁾ kW				4.0 [1.8	~4.7]		
Non	ninal heating capacity ⁽¹⁾	kW		4.5 [2.0	~5.4]		
Pow	er source		1 Phase, 220-240V 50Hz/220V 60Hz				
	Cooling power consumption	kW		1.04/1	.04		
	Running current (Cooling)	А		4.6/4	l.8		
1ta ⁽³⁾	Power factor (Cooling)	%		98/99			
n da	Heating power consumption	kW		1.10/1	.10		
Operation data ⁽³⁾	Running current (Heating)	А		4.9/5	5.2		
Der	Power factor (Heating)	%		97/9)7		
0	Inrush current (L.R.A) <max. curren<="" running="" td=""><td>t> A</td><td></td><td>5 <12</td><td>2></td><td></td></max.>	t> A		5 <12	2>		
	Noise level	dB(A)	Hi:42 Me:38 I	.0:35	47		
	rior dimensions ht × Width × Depth	mm	Unit 248 × 570 Panel 35 × 700		640 × 800) × 290	
	weight	kg	18.5 (Unit:15 Pa		43		
	igerant equipment		-		5CS130X	G04 × 1	
Start	ing method		_		Direct lin	ne start	
lea	t exchanger		Louver fin & inner gr	poved tubing	M shape fin & inner grooved tubing		
Refr	gerant control		_		Electronic expa	ansion valve	
Refr	igerant			R410	A		
Qua	ntity	kg	_		1.4 [Pre-charged up to the	e piping length of 15m	
Refr	igerant oil	l	-		0.48 (RE	368A)	
Defr	ost control			Microcomputer co	ontrolled de-icer		
	n andling equipment type & Q'ty		Turbo fan >	1	Propeller fan × 1		
Moto	Dr	W	52 × 1		45 × 1		
Start	ing method		Direct line s	tart	Direct line start		
Air f	low	СММ	Hi:11.5 Me:10	Lo:8	40		
Out	side air intake		Not possib	le	-		
Air f	ilter, Q'ty		Pocket plastic net × 1	(washable)	-		
Shoc	k & vibration absorber		Rubber sleeve (for	fan motor)	Rubber sleeve (fo	or compressor)	
	tric heater	W	-		-		
Oper	ration control ration switch		Wired remote control switch Wireless kit (Optional : RO	· 1	– (Indoor u	nit side)	
Rooi	n temperature control		Thermostat by ele		-		
Safe	ety equipment		Overload protection for fan motor. Frost protection thermostat.		Internal thermosta Anomalous discharge te		
Refr	allation data igerant piping size	mm (in)	Liqu	iid line: \(6.35 (1/4")	Gas line: \ophi12.7 (1/2")		
Con	necting method			Flare p	iping		
	n hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm) Holes size ϕ 20 × 5 pcs				
	ation for piping		Necessary (both Liquid & Gas lines)				
Acce	essories		Mounting kit. Drain hose				
Opti	onal parts			Decorative Panel (T	C-PSA-24W-ER)		
	Notes (1) The data are measured at the	following condi	tions.				
	Item	Indo	or air temperature	Outdoor ai	ir temperature	Standards	
	Operation	DB	WB	DB	WB	Standards	

Cooling 27°C 19°C 35°C $20^{\circ}\mathrm{C}$

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

7°℃

24°C

6°C

ISO-T1

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

Heating

Model FDTC50ZHXV

		Model	FDTC5	0ZHXV			
Item			FDTC50V	SRC50ZHX-S			
Nomina	al cooling capacity ⁽¹⁾	kW	5.0 [2.	2~5.6]			
Nomina	I heating capacity ⁽¹⁾	kW	5.4 [2.	5~6.3]			
Power s	source		1 Phase, 220-240V 50Hz/220V 60Hz				
Cooling power consumption kW			1.56	/1.56			
	nning current (Cooling)	А	6.9	7.2			
.od ata	wer factor (Cooling)	%	99/98				
Heating power consumption		kW	1.45/1.45				
Operation data ⁽³⁾ He No.d	nning current (Heating)	А	6.4	/6.7			
BO Po	wer factor (Heating)	actor (Heating) % 99/99					
Inr	rush current (L.R.A) <max. current="" running=""></max.>	А	5 <	14>			
No	vise level	dB(A)	Hi:42 Me:38 Lo:35	47			
	r dimensions × Width × Depth	mm	Unit 248 × 570 × 570 Panel 35 × 700 × 700	640 × 800 × 290			
Net wei	ght	kg	18.5 (Unit:15 Panel:3.5)	43			
	rant equipment essor type & Q'ty		_	5CS130XG04 × 1			
Starting 1	method		_	Direct line start			
Heat ex	at exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing			
Refrigera	ant control		_	Electronic expansion valve			
Refrige	rant		R4	10A			
Quantit	У	kg	– 1.4 [Pre-charged up to the piping le				
Refrige	rant oil	l	_	0.48 (RB68A)			
Defrost c	control		Microcomputer of	controlled de-icer			
Air han Fan type	dling equipment & O'ty		Turbo fan × 1	Propeller fan × 1			
Motor		W	52 × 1	45 × 1			
Starting 1	method		Direct line start	Direct line start			
Air flow		СММ	Hi:11.5 Me:10 Lo:8	40			
Outside	e air intake		Not possible	_			
Air filter	r, Q'ty		Pocket plastic net \times 1 (washable)	_			
Shock &	vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electric l	heater	W	_	_			
Operation Operation	on control n switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-TC-24W-ER)	– (Indoor unit side)			
Room ter	mperature control		Thermostat by electronics	_			
Safety e	equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
	tion data rant piping size	mm (in)	Liquid line: \$6.35 (1/4")) Gas line: φ12.7 (1/2″)			
Connec	ting method		Flare	piping			
Drain h	ose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 5$ pcs			
Insulation	n for piping		Necessary (both L	iquid & Gas lines)			
Accessor	ries	Mounting kit. Drain hose					
Optional	parte		Decorative Panel (TC DSA 24W ED)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Ctou doudo	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO T1
Heating	20°C		7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(b) Twin type

Model FDTC71VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDT	C71VNPV		
Item				FDTC40V	FDC71VN		
Nominal cooling capacity ⁽¹⁾				7.1	3.2~8.0]		
Nomi	nal heating capacity(1)		kW 8.0[3.6~9.0]				
Powe	r source			1 Phase, 220-240V 50Hz/220V 60Hz			
	Cooling power consump	tion	kW	1.	91/1.91		
	Running current (Coolin	ıg)	А	8.3/8.8			
ata ⁽³⁾	Power factor (Cooling)		%	99/99			
Operation data ⁽³⁾	Heating power consump	tion	kW	2.08/2.08			
ratio	Running current (Heatin	g)	А	9.0/9.6			
Dpei	Power factor (Heating)		%		99/98		
Ū	Inrush current (L.R.A) <m< td=""><td>lax. running current></td><td>А</td><td>Ę</td><td><17></td></m<>	lax. running current>	А	Ę	<17>		
	Noise level		dB(A)	Hi:42 Me:38 Lo:35	48		
	ior dimensions		mm	Unit 248 × 570 × 570	750 × 968 × 340		
-	t × Width × Depth		-	Panel 35 × 700 × 700			
Net w			kg	18.5 (Unit:15 Panel:3.5)	60		
	gerant equipment pressor type & Q'ty			_	2YC45DXD × 1		
Startin	g method			_	Direct line start		
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrigerant control			 Electronic expansion valve 				
Refrigerant				R410A			
Quantity		kg	-	2.95 [Pre-charged up to the piping length of 30m]			
	gerant oil		l	_	0.65 (FVC50K)		
	st control			Microcompute	er controlled de-icer		
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1		
Motor			W	52 × 1	86 × 1		
Startir	g method			Direc	et line start		
Air flo	w		СММ	Hi:11.5 Me:10 Lo:8	Cooling:60 Heating:50		
Outsi	de air intake			Not possible	-		
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-		
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
	c heater		W	_	20 (Crank case heater)		
	ation control			Wired remote control switch (Optional : RC-E3 Wireless kit (Optional : RCN-TC-24W-ER)	– (Indoor unit side)		
•				Thermostat by electronics			
Room temperature control Safety equipment				Overload protection for fan motor.	Internal thermostat for fan motor.		
			Frost protection thermostat.	Anomalous discharge temperature protection.			
	lation data gerant piping size	Liquid line	mm (in)	I/U 6.35(1/4") 9.52(3/8")×0			
		Gas line	,	I/U 12.7(1/2") 12.7(1/2")×0.8			
	ecting method hose			Connectable with VP20 (I.D. 20mm, O.D. 26mn	Holes size $\phi 20 \times 3 \text{ pcs}$		
	tion for piping				n Liquid & Gas lines)		
Acces				•	kit. Drain hose		
	al parts			C	el (TC-PSA-24W-ER)		
- peror	Notes (1) The data are	1 1 . 6 1	I				

Notes (1) The data are measured at the following conditions.

Item	Item Indoor air temperature			Outdoor air temperature		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating			7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WAI" × 1(option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDTC100VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	nits, Outdoor unit: 1 unit) FDTC1	00VNPV	
Item			model	FDTC50V FDC100VN		
Nominal cooling capacity ⁽¹⁾ kW			kW	10.0 [4	.0~11.2]	
Nomi	nal heating capacity(1)		kW	11.2 [4	.0~12.5]	
Powe	r source			1 Phase, 220-240	V 50Hz/220V 60Hz	
	Cooling power consumption	tion	kW	2.84	/2.84	
Running current (Cooling)		А	12.4/13.0			
I ta ⁽³⁾	Power factor (Cooling)		%	99	/99	
n da	Heating power consumpt	tion	kW	3.08	/3.08	
Operation data ⁽³⁾	Running current (Heating	g)	А	13.5	/14.1	
Ope	Power factor (Heating)		%	99	/99	
-	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>24></td></m<>	ax. running current>	А	5 <	24>	
	Noise level		dB(A)	Hi:42 Me:38 Lo:35	49	
	ior dimensions nt × Width × Depth		mm	Unit 248 × 570 × 570 Panel 35 × 700 × 700	845 × 970 × 370	
	veight		kg	18.5 (Unit:15 Panel:3.5)	74	
	rigerant equipment npressor type & Q'ty		_	RMT5126MDE2 × 1		
	ig method			-	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
Refrig	gerant			R4	10A	
Quan	tity		kg	_	3.8 [Pre-charged up to the piping length of 30m]	
Refri	gerant oil		l	_	0.9 (M-MA68)	
Defros	st control			Microcomputer controlled de-icer		
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1	
Motor			W	52 × 1	86 × 1	
Startin	ng method			Direct line start	Direct line start	
Air flo	w		СММ	Hi:11.5 Me:10 Lo:8	Cooling:75, Heating:73	
Outsi	de air intake			Not possible	_	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	_	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	ic heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-TC-24W-ER)	– (Indoor unit side)	
Room	temperature control			Thermostat by electronics	_	
Safety equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Instal	llation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refri	gerant piping size	Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
Conn	ecting method			Flare	piping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
Insula	tion for piping			Necessary (both Liquid & Gas lines)		
Acces	sories			Mounting k	it. Drain hose	
Optional parts				Decorative Panel (TC-PSA-24W-ER)		

onai parto

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	temperature	Outdoor air	temperature	Standards
Operation	DB	WB	DB	WB	Stalidards
Cooling	27°C	19°C	35°C	24°C	100 T1
Heating	20)°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" ×1(option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDTC100VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDTC1	DOVSPV	
Item			Woder	FDTC50V	FDC100VS	
Nominal cooling capacity ⁽¹⁾ kW			kW	10.0 [4.0~11.2]		
Nomi	nal heating capacity ⁽¹⁾		kW	11.2 [4	0~12.5]	
Powe	r source			3 Phase, 380-415	V 50Hz/380V 60Hz	
	Cooling power consumpt	tion	kW	2.84	/2.84	
	Running current (Cooling)		А	4.2	/4.4	
ata ⁽³⁾	Power factor (Cooling)		%	98	/98	
n da	Heating power consumpt	ion	kW	3.08	/3.08	
Operation data ⁽³⁾	Running current (Heating	g)	А	4.5	/4.8	
Ope	Power factor (Heating)		%	99	/97	
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>15></td></m<>	ax. running current>	А	5 <	15>	
	Noise level		dB(A)	Hi:42 Me:38 Lo:35	49	
	ior dimensions nt × Width × Depth		mm	Unit 248 × 570 × 570 Panel 35 × 700 × 700	845 × 970 × 370	
Net w	eight		kg	18.5 (Unit:15 Panel:3.5)	74	
	gerant equipment pressor type & Q'ty			-	RMT5126MDE3 × 1	
Startin	Starting method			_	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
Refri	Refrigerant			R4	10A	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refrig	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control			Microcomputer controlled de-icer		
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1	
Motor			W	52 × 1	86 × 1	
Startin	g method			Direct line start	Direct line start	
Air flo	DW .		СММ	Hi:11.5 Me:10 Lo:8	Cooling:75, Heating:73	
Outsi	de air intake			Not possible	-	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	ic heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-TC-24W-ER)	– (Indoor unit side)	
Room	temperature control			Thermostat by electronics		
Safet	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	lation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refri	gerant piping size	Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
Conn	ecting method			Flare	piping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
Insula	tion for piping			Necessary (both Liquid & Gas lines)		
Acces	sories			Mounting ki	t. Drain hose	
Optional parts				Decorative Panel (TC-PSA-24W-ER)		

nin Finn

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Standards
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1(option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(c) Triple type

Model FDTC140VNTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model			, FDTC14	0VNTV	
Item					FDTC50V		FDC140VN	
Nominal cooling capacity ⁽¹⁾			kW		14.0 [5.0~14.5]			
Nomi	inal heating capacity	1)	kW	16.0 [4.0~16.5]				
Powe	er source			1 Phase, 220-240V 50Hz/220V 60Hz				
	Cooling power consum	ption	kW	4.64/4.64				
	Running current (Cooli	ng)	А	20.4/21.3				
Ita ⁽³⁾	Power factor (Cooling)		%		99/99			
Operation data ⁽³⁾	Heating power consum	ption	kW		4.52/4.52			
ratio	Running current (Heati	ng)	А			20.0/	20.9	
Dper	Power factor (Heating)		%			98/	98	
0	Inrush current (L.R.A) <	Max. running current>	А			5 <2	24>	
	Noise level		dB(A)	I	Hi:42 Me:38 Lo	5:35	51	
Exter	ior dimensions		mm	Ur	it 248 × 570 :	× 570	845 × 970 × 370	
	nt × Width × Depth		-		nel 35 × 700			
	veight		kg	18.5	(Unit:15 Par	iel:3.5)	74	
	gerant equipment pressor type & Q'ty				_		RMT5126MDE2 × 1	
Startir	ng method			-			Direct line start	
leat	exchanger			Louver fin & inner grooved tubing		oved tubing	Straight fin & inner grooved tubing	
	gerant control				-		Electronic expansion valve	
	gerant					R41		
Quan	-		kg		-		3.8 [Pre-charged up to the piping length of 30m]	
	gerant oil st control		l	- 0.9 (M-MA68) Microcomputer controlled de-icer		0.9 (M-MA68)		
	andling equipment							
	pe & Q'ty			Turbo fan × 1		1	Propeller fan × 1	
Motor			W		52 × 1		86 × 1	
Startir	ng method				Direct line sta	urt	Direct line start	
Air fl			СММ	н	i:11.5 Me:10		Cooling:75, Heating:73	
	ide air intake				Not possible		-	
	lter, Q'ty				plastic net $\times 1$		-	
	& vibration absorber			Rubbe	er sleeve (for fa	un motor)	Rubber sleeve (for compressor)	
	ic heater		W	XX7: 1	-		20 (Crank case heater)	
	ation control tion switch					Optional : RC-E3) CN-TC-24W-ER)	- (Indoor unit side)	
Room	temperature control				rmostat by elec		_	
Safety equipment					d protection for protection the		Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Insta	llation data	Liquid line	mm	I/U	6.35(1/4")	9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refrigerant piping size Gas line		(in)	I/U	12.7(1/2")	12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")		
Connecting method						Flare	piping	
Drain	hose			Connectable wit	h VP20 (I.D. 2	0mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
[nsula	tion for piping					Necessary (both Li		
	sories			Mounting kit. Drain hose				
Option	nal parts					Decorative Panel (7	TC-PSA-24W-ER)	

Notes (1) The data are measured at the following conditions.

Item	Item Indoor air temperature			Outdoor air temperature		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating			7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) Branching pipe set "DIS-TA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDTC140VSTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model	FDTC14	OVSTV	
Item			model	FDTC50V	FDC140VS	
Nominal cooling capacity ⁽¹⁾ kW			kW	14.0 [5.	0~14.5]	
Nomi	nal heating capacity(1)		kW	16.0 [4.	D~16.5]	
Powe	r source			3 Phase, 380-415\	/ 50Hz/380V 60Hz	
	Cooling power consumpt	tion	kW	4.64/	4.64	
	Running current (Cooling)		А	6.8/	7.1	
Ita ⁽³⁾	Power factor (Cooling)		%	98/	99	
n da	Heating power consumpt	ion	kW	4.52/	4.52	
Operation data ⁽³⁾	Running current (Heating	g)	А	6.6/	7.0	
Ope	Power factor (Heating)		%	99/	98	
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <1</td><td>5></td></m<>	ax. running current>	А	5 <1	5>	
	Noise level		dB(A)	Hi:42 Me:38 Lo:35	51	
	ior dimensions nt × Width × Depth		mm	Unit 248 × 570 × 570 Panel 35 × 700 × 700	845 × 970 × 370	
Net w	eight		kg	18.5 (Unit:15 Panel:3.5)	74	
	gerant equipment pressor type & Q'ty			-	RMT5126MDE3 × 1	
Startin	ig method			-	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			-	Electronic expansion valve	
Refrig	gerant			R41	0A	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refrig	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control			Microcomputer controlled de-icer		
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan $\times 1$	
Motor			W	52 × 1	86 × 1	
Startin	ng method			Direct line start	Direct line start	
Air flo	ow		СММ	Hi:11.5 Me:10 Lo:8	Cooling:75, Heating:73	
Outsi	de air intake			Not possible	-	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	ic heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-TC-24W-ER)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics		
Safety equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Instal	llation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refri	gerant piping size	Gas lin	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
Connecting method				Flare	biping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insula	tion for piping			Necessary (both Li	quid & Gas lines)	
Acces	sories			Mounting kit	. Drain hose	
Optional parts				Decorative Panel (TC-PSA-24W-ER)		

situ purto

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Standards
Operation	DB	WB	DB	WB	Stalidards
Cooling	27°C	19°C	35°C	24°C	100 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) Branching pipe set "DIS-TA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(2) Ceiling cassette-4way type (FDT)

(a) Single type

Model FDT40ZHXV

		Model	FDT40	ZHXV		
Item			FDT40V	SRC40ZHX-S		
Nomi	inal cooling capacity ⁽¹⁾	kW	4.0 [1.	8~4.7]		
Nomi	inal heating capacity ⁽¹⁾	kW	4.5 [2.0~5.4]			
Powe	er source		1 Phase, 220-240V 50Hz/220V 60Hz			
	Cooling power consumption	kW	0.93/0.93			
	Running current (Cooling)	А	4.1/	/4.3		
ta ⁽³⁾	Power factor (Cooling)	%	98/98			
Operation data ⁽³⁾	Heating power consumption	kW	1.15/	/1.15		
atio	Running current (Heating)	А	5.2/5.4			
Der	Power factor (Heating)	%	97/97			
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <12>			
	Noise level	dB(A)	Hi:33 Me:31 Lo:30	47		
	rior dimensions ht × Width × Depth	mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	640 × 800 × 290		
Net w	veight	kg	27.5 (Unit:22 Panel:5.5)	43		
	gerant equipment pressor type & Q'ty		_	5CS130XG04 × 1		
Startir	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing		
Refrig	gerant control		-	Electronic expansion valve		
Refri	gerant		R41	10A		
Quan	ntity	kg	_	1.4 [Pre-charged up to the piping length of 15m]		
Refri	gerant oil	l	-	0.48 (RB68A)		
Defro	st control		Microcomputer controlled de-icer			
	andling equipment /pe & Q'ty		Turbo fan × 1	Propeller fan × 1		
Motor	ſ	W	50 × 1	45 × 1		
Startir	ng method		Direct line start	Direct line start		
Air fl	ow	СММ	Hi:18 Me:16 Lo:14	40		
Outsi	ide air intake		Possible	-		
Air fil	lter, Q'ty		Pocket plastic net × 1 (washable)	-		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electr	ic heater	W	_	-		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics	_		
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Installation data mm Refrigerant piping size (in)			Liquid line: 6.35 (1/4″)) Gas line: φ12.7 (1/2″)		
Connecting method			Flare	piping		
Drain hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 5 \text{ pcs}$		
Drain	Insulation for piping		Necessary (both Liquid & Gas lines)			
	tion for piping		Inecessary (bour L	iquid & Gas mies)		
Insula	stion for piping			t. Drain hose		

	0				
Item	Indoor air t	emperature	Outdoor air	temperature	Standards
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	150 T1
Heating	20)°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDT50ZHXV

		Model	FDT50	ZHXV	
Item			FDT50VN	SRC50ZHX-S	
Nomi	nal cooling capacity ⁽¹⁾	kW	5.0 [2.	2~5.6]	
Nomi	nal heating capacity ⁽¹⁾	kW	5.4 [2.5~6.3]		
Powe	r source		1 Phase, 220-240V 50Hz/220V 60Hz		
	Cooling power consumption	kW	1.29/	/1.29	
	Running current (Cooling)	А	5.7/	/6.0	
ata ⁽³⁾	Power factor (Cooling)	%	98/98		
Operation data ⁽³⁾	Heating power consumption	kW	1.29/	/1.29	
ratio	Running current (Heating)	А	5.7/6.0		
Ope	Power factor (Heating)	%	98/98		
	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	14>	
	Noise level	dB(A)	Hi:33 Me:31 Lo:30	47	
	ior dimensions ht × Width × Depth	mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	640 × 800 × 290	
Net w	reight	kg	29.5 (Unit:24 Panel:5.5)	43	
	gerant equipment pressor type & Q'ty		_	5CS130XG04 × 1	
Startir	ng method		_	Direct line start	
leat	exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing	
Refrig	erant control		-	Electronic expansion valve	
Refri	gerant		R41	10A	
Quan	tity	kg	_	1.4 [Pre-charged up to the piping length of 15m	
Refri	gerant oil	l	-	0.48 (RB68A)	
Defros	st control		Microcomputer controlled de-icer		
	andling equipment pe & Q'ty		Turbo fan × 1	Propeller fan × 1	
Motor		W	50 × 1	45 × 1	
Startir	ng method		Direct line start	Direct line start	
Air flo	w	СММ	Hi:18 Me:16 Lo:14	40	
Outsi	de air intake		Possible	_	
Air fil	ter, Q'ty		Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electr	ic heater	W	-	_	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)	
Room	temperature control		Thermostat by electronics	_	
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectior	
	llation data gerant piping size	mm (in)	Liquid line: ¢6.35 (1/4 ″)) Gas line:	
Conn	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 5$ pcs	
Insula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Mounting ki	t. Drain hose	
Optional parts			Decorative Panel (T-PSA-36W-E)		

Notes (1) The data are measured at the following conditions.

(1)	The data are measured at	8					
	Item	Indoor air t	emperature	Outdoor air	Standards		
_	Operation	DB	WB	DB	WB	Standards	
	Cooling	27°C	19°C	35°C	24°C	ISO-T1	
	Heating	20	°C	7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDT60ZHXV

		Model	FDT60	ZHXV	
Item			FDT60V	SRC60ZHX-S	
Nomi	nal cooling capacity ⁽¹⁾	kW	5.6 [2.	8~6.3]	
Nomi	nal heating capacity ⁽¹⁾	kW	6.7 [3.	1~7.1]	
Powe	r source		1 Phase, 220-240	V 50Hz/220V 60Hz	
	Cooling power consumption	kW	1.57/1.57		
	Running current (Cooling)	А	7.0/7.2		
Operation data ⁽³⁾	Power factor (Cooling)	%	98/99		
b nd	Heating power consumption	kW	1.85/1.85		
eratio	Running current (Heating)	А	8.2/8.7		
Ope	Power factor (Heating)	%	98/97		
	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	14>	
	Noise level	dB(A)	Hi:33 Me:31 Lo:30	48	
	ior dimensions nt × Width × Depth	mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	640 × 800 × 290	
Net w	<i>v</i> eight	kg	29.5 (Unit:24 Panel:5.5)	43	
	gerant equipment pressor type & Q'ty		-	5CS130XG04 × 1	
Startir	ng method		_	Direct line start	
Heat	exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing	
Refrig	erant control		_	Electronic expansion valve	
Refri	gerant		R4	10A	
Quan	tity	kg	_	1.4 [Pre-charged up to the piping length of 15m	
Refri	gerant oil	l	_	0.48 (RB68A)	
Defros	st control		Microcomputer of	controlled de-icer	
	andling equipment pe & Q'ty		Turbo fan × 1	Propeller fan × 1	
Motor		W	50 × 1	45 × 1	
Startir	ng method		Direct line start	Direct line start	
Air flo	ow	СММ	Hi:18 Me:16 Lo:14	40	
Outsi	ide air intake		Possible	_	
Air fil	ter, Q'ty		Pocket plastic net × 1 (washable)	_	
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electr	ic heater	W	-	-	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)	
Room	temperature control		Thermostat by electronics	_	
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)	Liquid line:	Gas line: φ12.7 (1/2″)	
Conn	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 5$ pcs	
Insula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Mounting ki	t. Drain hose	
Option	nal parts		Decorative Panel	(T-PSA-36W-E)	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Ctour down do		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO T1	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDT71VNV

		Model	FDT7	1VNV		
Item			FDT71V	FDC71VN		
Nomi	nal cooling capacity ⁽¹⁾	kW	7.1[3.	2~8.0]		
Nomi	nal heating capacity ⁽¹⁾	kW	8.0[3.	6~9.0]		
Powe	r source		1 Phase, 220-240	/ 50Hz/220V 60Hz		
Cooling power consumption		kW	1.90	/1.90		
	Running current (Cooling)	А	8.3/8.8			
Operation data ⁽³⁾	Power factor (Cooling)	%	99/98			
n da	Heating power consumption	kW	2.07	/2.07		
atio	Running current (Heating)	А	9.0/9.6			
ber	Power factor (Heating)	%	99	/98		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А		17>		
	Noise level	dB(A)	Hi:35 Me:33 Lo:31	48		
	ior dimensions nt × Width × Depth	mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	750 × 968 × 340		
-	reight	kg	29.5 (Unit:24 Panel:5.5)	60		
Refri	gerant equipment pressor type & Q'ty			2YC45DXD × 1		
	ng method		_	Direct line start		
Heat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control		_	Electronic expansion valve		
Refrig	gerant		R4 ⁻	10A		
Quan	tity	kg	-	2.95 [Pre-charged up to the piping length of 30m		
Refrig	gerant oil	l	-	0.65 (FVC50K)		
Defros	st control		Microcomputer controlled de-icer			
	andling equipment pe & Q'ty		Turbo fan × 1	Propeller fan × 1		
Motor		W	50 × 1	86 × 1		
	ng method	**		ine start		
Air flo	-	СММ	Hi:21 Me:19 Lo:17	Cooling:60 Heating:50		
	ide air intake		Possible			
	ter, Q'ty		Pocket plastic net \times 1 (washable)	_		
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	ic heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)		
-	temperature control		Thermostat by electronics	_		
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectior		
	llation data gerant piping size	mm (in)	Liquid line: ₀ 9.52 (3/8″)	Gas line:		
Conn	ecting method		Flare	piping		
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insula	tion for piping		Necessary (both L	iquid & Gas lines)		
Acces	sories		Mounting ki	t. Drain hose		
Optional parts			Decorative Panel (T-PSA-36W-E)			

Notes (1) The data are measured at the following conditions.

(1)	The data are measured at	ane reme a mg containensi				
	Item	Indoor air t	emperature	Outdoor air	Standards	
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Heating 20°C		°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDT100VNV

		Model	FDT10	DOVNV	
Item			FDT100V	FDC100VN	
Nomi	nal cooling capacity ⁽¹⁾	kW	10.0 [4.	0~11.2]	
Nomi	nal heating capacity ⁽¹⁾	kW	11.2 [4.	0~12.5]	
Powe	r source		1 Phase, 220-240	V 50Hz/220V 60Hz	
Cooling power consumption		kW	2.76/2.76		
	Running current (Cooling)	А	12.1/12.7		
Ita ⁽³⁾	Power factor (Cooling)	%	99/99		
Operation data ⁽³⁾	Heating power consumption	kW	2.74/2.74		
ratio	Running current (Heating)	А	12.0	/12.6	
Ope	Power factor (Heating)	%	99	/99	
•	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>	
	Noise level	dB(A)	Hi:40 Me:37 Lo:35	49	
	ior dimensions It × Width × Depth	mm	Unit 298 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370	
Net w	reight	kg	32.5 (Unit:27 Panel:5.5)	74	
	gerant equipment pressor type & Q'ty		_	RMT5126MDE2 × 1	
Startir	g method		_	Direct line start	
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control		-	Electronic expansion valve	
Refri	gerant		R4	10A	
Quan	tity	kg	-	3.8 [Pre-charged up to the piping length of 30m	
Refri	gerant oil	l	-	0.9 (M-MA68)	
	st control		Microcomputer	controlled de-icer	
	andling equipment pe & Q'ty		Turbo fan × 1	Propeller fan × 1	
Motor		W	140 × 1	86 × 1	
Startir	g method		Direct line start	Direct line start	
Air flo	w	СММ	Hi:27 Me:24 Lo:20	Cooling: 75, Heating: 73	
Dutsi	de air intake		Possible		
Air fil	ter, Q'ty		Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electr	ic heater	W	_	20 (Crank case heater)	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)	
Room	temperature control		Thermostat by electronics	_	
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectior	
	lation data gerant piping size	mm (in)	Liquid line: \$9.52 (3/8″)	Gas line: φ15.88 (5/8″)	
Conn	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Mounting ki	t. Drain hose	
Option	nal parts		Decorative Panel	(T-PSA-35W-ER)	

Notes (1) The data are measured at the following conditions.

(1)	The data are measured at	ane reme ang containensi				
	Item	Indoor air t	emperature	Outdoor air	Standards	
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz.

Model FDT100VSV

		Model	FDT10	DOVSV	
Item			FDT100V	FDC100VS	
Nomi	nal cooling capacity ⁽¹⁾	kW	10.0 [4.	0~11.2]	
Nomi	nal heating capacity ⁽¹⁾	kW	11.2 [4.	0~12.5]	
Powe	r source		3 Phase, 380-415	V 50Hz/380V 60Hz	
Cooling power consumption		kW	2.76	/2.76	
	Running current (Cooling)	А	4.2/4.4		
ıta ⁽³⁾	Power factor (Cooling)	%	95/91		
Operation data ⁽³⁾	Heating power consumption	kW	2.74	/2.74	
ratic	Running current (Heating)	А	4.2	/4.4	
Ope	Power factor (Heating)	%	94	/95	
•	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>	
	Noise level	dB(A)	Hi:40 Me:37 Lo:35	49	
	ior dimensions nt × Width × Depth	mm	Unit 298 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370	
Net w	reight	kg	32.5 (Unit:27 Panel:5.5)	74	
	gerant equipment pressor type & Q'ty		_	RMT5126MDE3 × 1	
Startir	ng method		_	Direct line start	
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control		_	Electronic expansion valve	
Refri	gerant		R4	10A	
Quan	tity	kg		3.8 [Pre-charged up to the piping length of 30m]	
Refri	gerant oil	l	-	0.9 (M-MA68)	
Defros	st control		Microcomputer of	controlled de-icer	
	andling equipment pe & Q'ty		Turbo fan × 1	Propeller fan × 1	
Aotor		W	140 × 1	86 × 1	
	ng method	**	Direct line start	Direct line start	
Air flo	5	СММ	Hi:27 Me:24 Lo:20	Cooling: 75, Heating: 73	
	ide air intake	•	Possible	_	
	lter, Q'ty		Pocket plastic net × 1 (washable)	_	
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	ic heater	W	_	20 (Crank case heater)	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)	
·	temperature control		Thermostat by electronics	_	
	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)	Liquid line: \$9.52 (3/8")	Gas line: φ15.88 (5/8″)	
Conn	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Mounting ki	t. Drain hose	
Optional parts					

Notes (1) The data are measured at the following conditions.

(I) Ine data are measur	ou at the ron	io ning conditions	•			
	ltem	Indoor air	temperature	Outdoor air	Standards	
Operation		DB	WB	DB	WB	Standards
Cooling	Cooling 27°C		19°C	35°C	24°C	ISO-T1
Heating		20°C		7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

Model FDT125VNV

		Model	FDT12	25VNV			
Item		Widder	FDT125V	FDC125VN			
Nomi	nal cooling capacity ⁽¹⁾	kW	12.5 [5.	0~14.0]			
Nomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.	0~16.0]			
Powe	r source		1 Phase, 220-240	V 50Hz/220V 60Hz			
Cooling power consumption		kW	4.05/4.05				
	Running current (Cooling)	А	17.6/18.6				
Ita ⁽³⁾	Power factor (Cooling)	%	99/99				
Operation data ⁽³⁾	Heating power consumption	kW	3.77	3.77/3.77			
ratio	Running current (Heating)	А	16.6	/17.3			
Ope	Power factor (Heating)	%	99	/99			
-	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>			
	Noise level	dB(A)	Hi:42 Me:40 Lo:37	Cooling: 50, Heating: 51			
	ior dimensions nt × Width × Depth	mm	Unit 298 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370			
Net w	<i>r</i> eight	kg	32.5 (Unit:27 Panel:5.5)	74			
	gerant equipment pressor type & Q'ty		_	RMT5126MDE2 × 1			
Startir	ng method		_	Direct line start			
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrig	erant control		-	Electronic expansion valve			
Refri	gerant		R4	10A			
Quan	tity	kg	-	3.8 [Pre-charged up to the piping length of 30m]			
Refri	gerant oil	l	-	0.9 (M-MA68)			
	st control		Microcomputer	controlled de-icer			
	andling equipment pe & Q'ty		Turbo fan $\times 1$	Propeller fan × 1			
Motor		W	140 × 1	86 × 1			
Startir	ng method		Direct line start	Direct line start			
Air flo	DW	СММ	Hi:30 Me:27 Lo:23	Cooling: 75, Heating: 73			
Outsi	ide air intake		Possible	_			
Air fil	ter, Q'ty		Pocket plastic net × 1 (washable)	_			
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electr	ic heater	W	_	20 (Crank case heater)			
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)			
Room	temperature control		Thermostat by electronics	-			
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
	llation data gerant piping size	mm (in)	Liquid line:	Gas line:			
Conn	ecting method		Flare	piping			
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$			
Insula	tion for piping		Necessary (both L	iquid & Gas lines)			
Acces	sories		Mounting ki	t. Drain hose			
Option	nal parts		Decorative Pane	I (T-PSA-36W-E)			

Notes (1) The data are measured at the following conditions.

(1)	The data are measured at	ane reme a mg containensi				
	Item	Indoor air t	emperature	Outdoor air	temperature	Stondordo
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Cooling 27°C Heating 20°		°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDT125VSV

		Model	FDT1	25VS			
Item			FDT125V	FDC125VS			
Nomi	nal cooling capacity ⁽¹⁾	kW	12.5 [5.	0~14.0]			
Nomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.	0~16.0]			
Powe	r source		3 Phase, 380-415	V 50Hz/380V 60Hz			
Cooling power consumption		kW	4.05	/4.05			
	Running current (Cooling)	А	5.9	5.9/6.3			
Operation data ⁽³⁾	Power factor (Cooling)	%	99/98				
n da	Heating power consumption	kW	3.77	3.77/3.77			
atio	Running current (Heating)	А	5.5/5.9				
ber	Power factor (Heating)	%	99	/97			
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>			
	Noise level	dB(A)	Hi:42 Me:40 Lo:37	Cooling: 50, Heating: 51			
	ior dimensions nt × Width × Depth	mm	Unit 298 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370			
	veight	kg	32.5 (Unit:27 Panel:5.5)	74			
	gerant equipment pressor type & Q'ty		_	RMT5126MDE3 × 1			
Startin	ng method		_	Direct line start			
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrig	erant control		-	Electronic expansion valve			
Refri	gerant		R4	10A			
Quan	tity	kg	-	3.8 [Pre-charged up to the piping length of 30m			
Refri	gerant oil	l	-	0.9 (M-MA68)			
Defros	st control		Microcomputer	controlled de-icer			
	andling equipment pe & Q'ty		Turbo fan $\times 1$	Propeller fan × 1			
Motor		W	140 × 1	86 × 1			
	ng method		Direct line start	Direct line start			
Air flo	0	СММ	Hi:30 Me:27 Lo:23	Cooling: 75, Heating: 73			
	ide air intake	•	Possible				
	lter, Q'ty		Pocket plastic net × 1 (washable)	_			
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	ic heater	W	_	20 (Crank case heater)			
Opera	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)			
-	temperature control		Thermostat by electronics	_			
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
	llation data gerant piping size	mm (in)	Liquid line: \$9.52 (3/8″)	Gas line: φ15.88 (5/8″)			
Conn	ecting method		Flare	piping			
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$			
Insula	tion for piping		Necessary (both L	iquid & Gas lines)			
Acces	sories		Mounting ki	t. Drain hose			
~ .	nal parts		Decorative Panel	T DCA 2CW E)			

Notes (1) The data are measured at the following conditions.

(1)	The data are measured at the following conditions								
	Item	Indoor air t	emperature	Outdoor air	temperature	Stondordo			
	Operation	DB	WB	DB	WB	Standards			
	Cooling	27°C	19°C	35°C	24°C	ISO-T1			
	Heating	20	°C	7°C	6°C	150-11			

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

Model FDT140VNV

		Model	FDT14	10VNV		
Item		moder	FDT140V	FDC140VN		
Nomi	nal cooling capacity ⁽¹⁾	kW	14.0 [5.	0~14.5]		
Nomi	nal heating capacity ⁽¹⁾	kW	16.0 [4.0~16.5]			
Powe	r source		1 Phase, 220-240V 50Hz/220V 60Hz			
	Cooling power consumption	kW	4.98/4.98			
	Running current (Cooling)	А	22.0/23.0			
Ita ⁽³⁾	Power factor (Cooling)	%	98/98			
Operation data ⁽³⁾	Heating power consumption	kW	4.57	/4.57		
ratio	Running current (Heating)	А	20.2/21.2			
Ope	Power factor (Heating)	%	98.	/98		
	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>		
	Noise level	dB(A)	Hi:43 Me:41 Lo:38	51		
	ior dimensions ht × Width × Depth	mm	Unit 298 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370		
Net w	reight	kg	32.5 (Unit:27 Panel:5.5)	74		
	gerant equipment pressor type & Q'ty		_	RMT5126MDE2 × 1		
Startin	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control		-	Electronic expansion valve		
Refri	gerant		R4 ⁻	10A		
Quan	tity	kg		3.8 [Pre-charged up to the piping length of 30m]		
Refri	gerant oil	l	-	0.9 (M-MA68)		
Defros	st control		Microcomputer controlled de-icer			
	andling equipment pe & Q'ty		Turbo fan × 1	Propeller fan × 1		
Motor		W	140 × 1	86 × 1		
Startin	ng method		Direct line start	Direct line start		
Air flo	-	СММ	Hi:30 Me:27 Lo:23	Cooling: 75, Heating: 73		
Dutsi	de air intake		Possible	_		
Air fil	ter, Q'ty		Pocket plastic net × 1 (washable)	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	ic heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics	_		
Safety equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
	llation data gerant piping size	mm (in)	Liquid line:	Gas line:		
Connecting method			Flare	piping		
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insula	tion for piping		Necessary (both L	iquid & Gas lines)		
Accessories			Mounting ki	t. Drain hose		
icces			Decorative Panel (T-PSA-36W-E)			

Notes (1) The data are measured at the following conditions.

(1)	The data are measured at the following conditions								
	Item	Indoor air t	emperature	Outdoor air	temperature	Stondordo			
	Operation	DB	WB	DB	WB	Standards			
	Cooling	27°C	19°C	35°C	24°C	ISO-T1			
	Heating	20	°C	7°C	6°C	150-11			

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDT140VS

		Model	FDT14	40VSV		
Item			FDT140V	FDC140VS		
Nomi	inal cooling capacity ⁽¹⁾	kW	14.0 [5.	0~14.5]		
Nomi	inal heating capacity ⁽¹⁾	kW	16.0 [4.0~16.5]			
Powe	er source		3 Phase, 380-415V 50Hz/380V 60Hz			
Cooling power consumption		kW	4.98	/4.98		
Running current (Cooling)		А	7.4/7.8			
ata ⁽³⁾	Power factor (Cooling)	%	97	/97		
Operation data ⁽³⁾	Heating power consumption	kW	4.57	/4.57		
atio	Running current (Heating)	А	6.7/7.4			
Dpei	Power factor (Heating)	%	98	/94		
Ŭ	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>		
	Noise level	dB(A)	Hi:43 Me:41 Lo:38	51		
	rior dimensions ht × Width × Depth	mm	Unit 365 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370		
Net w	veight	kg	32.5 (Unit:27 Panel:5.5)	74		
	gerant equipment pressor type & Q'ty		_	RMT5126MDE3 × 1		
Startir	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	gerant control		_	Electronic expansion valve		
Refri	gerant		R4	10A		
Quan	ntity	kg		3.8 [Pre-charged up to the piping length of 30m		
Refri	gerant oil	l	-	0.9 (M-MA68)		
Defros	st control		Microcomputer controlled de-icer			
	andling equipment /pe & Q'ty		Turbo fan × 1	Propeller fan × 1		
Motor		W	140 × 1	86 × 1		
	ng method		Direct line start	Direct line start		
Air flo	-	СММ	Hi:30 Me:27 Lo:23	Cooling: 75, Heating: 73		
Dutsi	ide air intake	-	Possible	_		
	lter, Q'ty		Pocket plastic net \times 1 (washable)	_		
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electr	ic heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics	_		
Safet	y equipment		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectior		
	llation data gerant piping size	mm (in)	Liquid line: 69.52 (3/8 ″)	Gas line: φ15.88 (5/8″)		
Conn	necting method		Flare	piping		
Drain	n hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insula	tion for piping		Necessary (both L	iquid & Gas lines)		
Acces	sories		Mounting ki	t. Drain hose		
Optional parts			Decorative Panel	(# D2 () (# D2)		

Notes (1) The data are measured at the following conditions.

) The data are measured at									
Item Indoor air temperature			Outdoor air	Standards					
Operation	DB	WB	DB	WB	Standards				
Cooling	27°C	19°C	35°C	24°C	ISO-T1				
Heating	20	°C	7°C	6°C	150-11				

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(b) Twin type

Model FDT71VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model			FDT71	VNPV	
Item					FDT40V		FDC71VN	
Nomi	nal cooling capacity ⁽¹)	kW	7.1[3.2~		7.1[3.	2~8.0]	
Nomi	nal heating capacity ⁽¹)	kW	8.0[3.6~9.0]			6~9.0]	
Powe	r source			1 Phase, 220-240V 50Hz/220V 60Hz			/ 50Hz/220V 60Hz	
	Cooling power consumption	ption	kW	1.85/1.85				
	Running current (Coolin	ng)	А			8.0/	3.6	
ta ⁽³⁾	Power factor (Cooling)		%		99/98			
Operation data ⁽³⁾	Heating power consump	otion	kW			1.99/	/1.99	
atio	Running current (Heatin	ng)	А			8.7/	/9.1	
Dpei	Power factor (Heating)		%			99/	/99	
•	Inrush current (L.R.A) <n< td=""><td>/ax. running current></td><td>А</td><td></td><td></td><td>5 <</td><td>17></td></n<>	/ax. running current>	А			5 <	17>	
	Noise level		dB(A)		Hi:33 Me:31 L	.0:30	48	
	ior dimensions nt × Width × Depth		mm		nit 246 × 840 anel 35 × 950		750 × 968 × 340	
-	reight		kg		5 (Unit:22 Pa		60	
Refri	gerant equipment pressor type & Q'ty				-		2YC45DXD × 1	
	ig method			_			Direct line start	
leat	exchanger			Louver	f in & inner gro	ooved tubing	Straight f in & inner grooved tubing	
Refrig	erant control				-		Electronic expansion valve	
Refri	gerant					R41	A01	
Quan	tity		kg		-		2.95 [Pre-charged up to the piping length of 30r	
Refri	gerant oil		l		-		0.65 (FVC50K)	
	st control			Microcomputer controlled de-icer		controlled de-icer		
	andling equipment			Turbo fan × 1 Pr		Propeller fan × 1		
an ty Motor	pe & Q'ty		W	50 × 1		86 × 1		
	ig method		**		30 × 1	Direct l		
Air flo	-		СММ	ŀ	li:18 Me:16 L		Cooling:60 Heating:50	
	de air intake		•		Possible		_	
Air fil	ter, Q'ty			Pocket	plastic net × 1	(washable)	_	
	& vibration absorber				er sleeve (for f		Rubber sleeve (for compressor)	
Electr	ic heater		W		_		20 (Crank case heater)	
Opera	ation control			Wired remote	control switch	(Optional : RC-E3)	– (Indoor unit side)	
1	tion switch					RCN-T-36W-E)	(indoor diff side)	
Room	temperature control				ermostat by ele		-	
Safety equipment				ad protection for at protection the	ermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	llation data	Liquid line	mm	I/U	6.35(1/4")	9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refrigerant piping size Gas line		(in)	I/U	12.7(1/2")	12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")		
Connecting method					Flare	piping		
	hose			Connectable wi	th VP20 (I.D. 1	20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
	tion for piping					Necessary (both L		
	sories					Mounting kit		
Option	nal parts					Decorative Panel	(T-PSA-36W-E)	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Standards
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT100VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDT10	0VNPV	
Item			Widdei	FDT50V	FDC100VN	
Nomi	nal cooling capacity ⁽¹⁾		kW	10.0 [4.	0~11.2]	
Nomi	nal heating capacity ⁽¹⁾		kW	11.2 [4.0~12.5]		
Powe	r sourc			1 Phase, 220-240	/ 50Hz/220V 60Hz	
	Cooling power consumpt	ion	kW	2.94	/2.94	
	Running current (Cooling	g)	А	12.9/13.7		
Ita ⁽³⁾	Power factor (Cooling)		%	99	/98	
n da	Heating power consumpt	ion	kW	3.09	/3.09	
Operation data ⁽³⁾	Running current (Heating	g)	А	13.6	/14.2	
Ope	Power factor (Heating)		%	99	/99	
	Inrush current (L.R.A) <ma< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>24></td></ma<>	ax. running current>	А	5 <	24>	
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	49	
	ior dimensions nt × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370	
Net w	eight		kg	27.5 (Unit:22 Panel:5.5)	74	
	Refrigerant equipment Compressor type & Q'ty			_	RMT5126MDE2 × 1	
Startin	g method			_	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
Refri	gerant			R4	10A	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refrig	gerant oil		l	_	0.9 (M-MA68)	
Defros	st control			Microcomputer	controlled de-icer	
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1	
Motor			W	50 × 1	86 × 1	
Startin	g method			Direct line start	Direct line start	
Air flo	w		СММ	Hi:18 Me:16 Lo:14	Cooling: 75, Heating: 73	
Outsi	de air intake			Possible	-	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	c heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics		
Safet	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	lation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refri	gerant piping size	Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
Conn	ecting method			Flare	piping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
Insula	tion for piping			Necessary (both L	iquid & Gas lines)	
Acces	sories			Mounting ki	t. Drain hose	
Optional parts				Decorative Panel (T-PSA-36W-E)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Standarda
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT100VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	Its, Outdoor unit: 1 unit))VSPV	
Item			Widdei	FDT50V	FDC100VS	
Nomi	nal cooling capacity ⁽¹⁾		kW	10.0 [4.0~11.2]		
Nomi	nal heating capacity ⁽¹⁾		kW	11.2 [4.0	-	
	r source			3 Phase, 380-415	•	
	Cooling power consumpt	ion	kW	2.94/	2.94	
	Running current (Cooling	<u>z</u>)	А	4.3/4.6		
ta ⁽³⁾	Power factor (Cooling)		%	99/	97	
Operation data ⁽³⁾	Heating power consumpt	ion	kW	3.09/	3.09	
atior	Running current (Heating		А	4.5/	4.8	
bera	Power factor (Heating)		%	99/	98	
0	Inrush current (L.R.A) <ma< td=""><td>ax. running current></td><td>А</td><td>5 <1</td><td>15></td></ma<>	ax. running current>	А	5 <1	15>	
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	49	
	ior dimensions at × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370	
Net w	•		kg	27.5 (Unit:22 Panel:5.5)	74	
	Refrigerant equipment Compressor type & Q'ty			-	RMT5126MDE3 × 1	
Startin	g method			-	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
Refrig	gerant			R41	0A	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refrig	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control			Microcomputer c	ontrolled de-icer	
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1	
Motor			W	50 × 1	86 × 1	
Startin	g method			Direct line start	Direct line start	
Air flo	w		СММ	Hi:18 Me:16 Lo:14	Cooling: 75, Heating: 73	
Outsi	de air intake			Possible	-	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	ic heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics	-	
Safet	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	lation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refri	gerant piping size	Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
Conn	ecting method			Flare	biping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
Insula	tion for piping			Necessary (both Liquid & Gas lines)		
Acces	sories			Mounting kit	. Drain hose	
Optional parts			Decorative Panel (T-PSA-36W-E)			

onai parts

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Stalidards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT125VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDT12	5VNPV	
Item			Widder	FDT60V	FDC125VN	
Nomi	nal cooling capacity ⁽¹⁾		kW	12.5 [5.	0~14.0]	
Nomi	nal heating capacity ⁽¹⁾		kW	14.0 [4.0~16.0]		
Powe	r source			1 Phase, 220-240	/ 50Hz/220V 60Hz	
	Cooling power consumpt	tion	kW	3.95/	3.95	
	Running current (Cooling	g)	А	17.7/	18.5	
ata ⁽³⁾	Power factor (Cooling)		%	97/	97	
n da	Heating power consumpt	ion	kW	3.70/	3.70	
Operation data ⁽³⁾	Running current (Heating	g)	А	16.6/	17.3	
Ope	Power factor (Heating)		%	97/	97	
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>24></td></m<>	ax. running current>	А	5 <	24>	
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	Cooling: 50, Heating: 51	
	ior dimensions nt × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370	
Net w	eight		kg	29.5 (Unit:24 Panel:5.5)	74	
	Refrigerant equipment Compressor type & Q'ty			_	RMT5126MDE2 × 1	
Startin	g method			-	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
Refrig	gerant			R41	A0	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refri	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control	-		Microcomputer c	ontrolled de-icer	
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1	
Motor			W	50 × 1	86 × 1	
Startin	g method			Direct line start	Direct line start	
Air flo	w		СММ	Hi:18 Me:16 Lo:14	Cooling: 75, Heating: 73	
Outsi	de air intake			Possible	-	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	c heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics	-	
Safet	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	lation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refri	gerant piping size	Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
Conn	ecting method			Flare	piping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insula	tion for piping			Necessary (both L	iquid & Gas lines)	
Acces	sories			Mounting ki	. Drain hose	
Optional parts				Decorative Panel (T-PSA-36W-E)		

Notes (1) The data are measured at the following conditions.

· · ·		0				
	Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). :Pipe of O/U~Branch, :Pipe of Branch~I/U

Model FDT125VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	Its, Outdoor unit: 1 unit)	5VSPV			
Item			Widder	FDT60V	FDC125VS			
Nominal cooling capacity ⁽¹⁾ kV			kW	12.5 [5.	0~14.0]			
Nomi	nal heating capacity ⁽¹⁾		kW	14.0 [4.	-			
Powe	r source			3 Phase, 380-415V 50Hz/380V 60Hz				
	Cooling power consumpt	ion	kW	3.95/	3.95			
	Running current (Cooling)		А	5.9/6.2				
Ita ⁽³⁾	Power factor (Cooling)		%	97/	97			
n da	Heating power consumpt	ion	kW	3.70/	3.70			
Operation data ⁽³⁾	Running current (Heating	g)	А	5.5/	5.8			
Ope	Power factor (Heating)		%	97/	97			
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>15></td></m<>	ax. running current>	А	5 <	15>			
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	Cooling: 50, Heating: 51			
	Exterior dimensions Height × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370			
Net w	Net weight		kg	29.5 (Unit:24 Panel:5.5)	74			
	gerant equipment pressor type & Q'ty	- BM15126M1		RMT5126MDE3 × 1				
Startin	Starting method			_	Direct line start			
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrig	erant control			_	Electronic expansion valve			
Refrig	gerant			R41	A0			
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]			
Refrig	gerant oil		l	-	0.9 (M-MA68)			
Defros	st control			Microcomputer c	ontrolled de-icer			
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1			
Motor			W	50 × 1	86 × 1			
Startin	g method			Direct line start	Direct line start			
Air flo	DW		СММ	Hi:18 Me:16 Lo:14	Cooling: 75, Heating: 73			
Outsi	de air intake			Possible	-			
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-			
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electri	c heater		W	-	20 (Crank case heater)			
	ation control			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)			
Room	temperature control			Thermostat by electronics				
Safet	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.			
Instal	Installation data Liquid line Refrigerant piping size Gas line		mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")			
Refrig			(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")			
Conn	ecting method			Flare	piping			
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$			
Insulat	tion for piping			Necessary (both L	iquid & Gas lines)			
Access	sories			Mounting kit	. Drain hose			
Optional parts				Decorative Panel (T-PSA-36W-E)				

Notes (1) The data are measured at the following conditions.

- (-)		8				
	Item	Indoor air t	emperature	Outdoor air	temperature	Stendarde
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT140VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	Its, Outdoor unit: 1 unit)	0VNPV	
Item			Widder	FDT71V	FDC140VN	
Nomi	nal cooling capacity ⁽¹⁾		kW	14.0 [5.	0~14.5]	
Nomi	nal heating capacity ⁽¹⁾		kW	16.0 [4.0~16.5]		
Powe	r source			1 Phase, 220-240V 50Hz/220V 60Hz		
	Cooling power consumption	tion	kW	4.51	/4.51	
	Running current (Cooling)		А	19.8/20.7		
1ta ⁽³⁾	Power factor (Cooling)		%	99	/99	
n da	Heating power consumpt	ion	kW	4.58	/4.58	
Operation data ⁽³⁾	Running current (Heating	g)	А	20.1	/21.0	
Ope	Power factor (Heating)		%	99	/99	
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>24></td></m<>	ax. running current>	А	5 <	24>	
	Noise level		dB(A)	Hi:35 Me:33 Lo:31	51	
	ior dimensions nt × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370	
Net weight		kg	29.5 (Unit:24 Panel:5.5)	74		
	gerant equipment pressor type & Q'ty		– RMT5126MDE2		RMT5126MDE2 × 1	
Startin	Starting method			_	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
Refri	gerant			R4	10A	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refri	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control			Microcomputer	controlled de-icer	
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1	
Motor			W	50 × 1	86 × 1	
Startin	g method			Direct line start	Direct line start	
Air flo	ow		СММ	Hi:21 Me:19 Lo:17	Cooling: 75, Heating: 73	
Outsi	de air intake			Possible	-	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electr	ic heater		W	_	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)	
Room	temperature control			Thermostat by electronics	-	
Safet	y equipmen			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Insta	Installation data Liquid line Refrigerant piping size Gas line		mm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refri			(in)	I/U 15.88(5/8") 15.88(5/8")×1.	0 15.88(5/8")×1.0 O/U 15.88(5/8")	
Conn	ecting method			Flare	piping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insula	tion for piping			Necessary (both L	iquid & Gas lines)	
Acces	sories			Mounting ki	t. Drain hose	
Option	nal parts			Decorative Panel (T-PSA-36W-E)		

Notes (1) The data are measured at the following conditions.

- (-)		8				
	Item	Indoor air t	emperature	Outdoor air	temperature	Stead and a
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	150 T1
	Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT140VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDT14	0VSPV	
Item			Widder	FDT71V	FDC140VS	
Nomi	nal cooling capacity ⁽¹⁾		kW	14.0 [5	.0~14.5]	
Nomi	nal heating capacity ⁽¹⁾		kW	-	.0~16.5]	
Powe	r source			3 Phase, 380-415V 50Hz/380V 60Hz		
	Cooling power consumption Running current (Cooling)		kW	4.51	/4.51	
			А	6.7/7.1		
ita ⁽³⁾	Power factor (Cooling)		%	97	/97	
n da	Heating power consumpt	ion	kW	4.58	/4.58	
Operation data ⁽³⁾	Running current (Heating	g)	А	6.7	/7.1	
Ope	Power factor (Heating)		%	99	/98	
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>15></td></m<>	ax. running current>	А	5 <	15>	
	Noise level		dB(A)	Hi:35 Me:33 Lo:31	51	
	ior dimensions nt × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370	
Net w	Net weight		kg	29.5 (Unit:24 Panel:5.5)	74	
-	gerant equipment pressor type & Q'ty			_	RMT5126MDE3 × 1	
Startin	ng method			_	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			-	Electronic expansion valve	
Refrig	gerant			R4	10A	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refrig	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control	-		Microcomputer	controlled de-icer	
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1	
Motor			W	50 × 1	86 × 1	
Startin	ng method			Direct line start	Direct line start	
Air flo	w		СММ	Hi:21 Me:19 Lo:17	Cooling: 75, Heating: 73	
Outsi	de air intake			Possible	-	
Air fil	ter, Q'ty			Pocket plastic net \times 1 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	ic heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics	-	
Safet	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	Installation data Liquid line		mm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refrig	gerant piping size	Gas line	(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	15.88(5/8")×1.0 O/U 15.88(5/8")	
Conn	ecting method			Flare	piping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insulat	tion for piping			Necessary (both I	iquid & Gas lines)	
Access	sories			Mounting k	t. Drain hose	
Optional parts			Decorative Panel (T-PSA-36W-E)			

Notes (1) The data are measured at the following conditions.

· · ·		8				
	Item	Indoor air t	emperature	Outdoor air	temperature	Ston dondo
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	150 71
	Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT200VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDT20	OVSPV		
Item			Widdei	FDT100V	FDC200VS		
Nomi	nal cooling capacity ⁽¹⁾		kW	20.0 [7.	0~22.4]		
Nomi	nal heating capacity ⁽¹⁾		kW	22.4 [7.	-		
Powe	r source			3 Phase, 380-415V 50Hz/380V 60Hz			
	Cooling power consumpt	ion	kW	6.58/	6.58		
	Running current (Cooling	g)	А	9.9/10.6			
1ta ⁽³⁾	Power factor (Cooling)		%	96/	94		
n da	Heating power consumpt	ion	kW	6.02/	6.02		
Operation data ⁽³⁾	Running current (Heating	g)	А	9.1/	9.8		
Ope	Power factor (Heating)		%	95/	/93		
	Inrush current (L.R.A) <ma< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>19></td></ma<>	ax. running current>	А	5 <	19>		
	Noise level		dB(A)	Hi:40 Me:37 Lo:35	57		
	ior dimensions it × Width × Depth		mm	Unit 298 × 840 × 840 Panel 35 × 950 × 950	1300 × 970 × 370		
Net w	Net weight		kg	32.5 (Unit:27 Panel:5.5)	122		
-	jerant equipment pressor type & Q'ty			– GTC5150ND70K × 1			
Startin	Starting method			_	Direct line start		
Heat e	leat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control			-	Electronic expansion valve		
Refrig	jerant			R41	A		
Quan	tity		kg	_	5.4 [Pre-charged up to the piping length of 30m]		
Refrig	jerant oil		l	-	1.45 (M-MA32R)		
Defros	t control			Microcomputer c	ontrolled de-icer		
	ndling equipment pe & Q'ty			Turbo fan × 1	Propeller fan $\times 2$		
Motor			W	140 × 1	86 × 2		
Startin	g method			Direct line start	Direct line start		
Air flo	w		СММ	Hi:27 Me:24 Lo:20	Cooling: 150, Heating: 145		
Outsi	de air intake			Possible	-		
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	_		
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	c heater		W	-	33 (Crank case heater)		
	ation control			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)		
Room	temperature control			Thermostat by electronics	-		
Safety	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Instal	Installation data Liquid line Refrigerant piping size Gas line ⁽⁶⁾		mm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")		
Refrig			(in)	I/U 15.88(5/8") 15.88(5/8")×1.	0 22.22(7/8")×1.6 O/U 22.22(7/8")		
Conn	ecting method			Flare piping (Outdoor	gas piping: Brazing)		
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $20 \times 3 \text{ pcs}$		
Insulat	ion for piping			Necessary (both L	iquid & Gas lines)		
Access	sories			Mounting kit. Drain hose, Reducer kit (Please	e see 1.5.3), Accessory pipe (Please see 1.5.3)		
Optional parts				Decorative Panel (T-PSA-36W-E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	180 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-WB1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT250VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

		(Model	FDT25	OVSPV	
Item			Woder	FDT125V	FDC250VS	
Nominal cooling capacity ⁽¹⁾ kW		kW	25.0 [10	.0~28.0]		
Nomi	nal heating capacity(1)		kW	28.0 [9.5~31.5]		
Powe	r source			3 Phase, 380-415V 50Hz/380V 60Hz		
Cooling power consumption		kW	8.30/	8.30		
	Running current (Coolin	g)	А	12.4/	13.0	
Operation data ⁽³⁾	Power factor (Cooling)		%	97/	97	
n dâ	Heating power consumption	ion	kW	7.75/	7.75	
ratic	Running current (Heating)		А	11.8/	12.3	
Ope	Power factor (Heating)		%	95/	96	
•	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>22></td></m<>	ax. running current>	А	5 <	22>	
	Noise level		dB(A)	Hi:42 Me:40 Lo:37	Cooling:57, Heating: 58	
	ior dimensions It × Width × Depth		mm	Unit 298 × 840 × 840 Panel 35 × 950 × 950	1505 × 970 × 370	
Net weight		kg	32.5 (Unit:27 Panel:5.5)	140		
	Refrigerant equipment Compressor type & Q'ty			-	GTC5150ND70K × 1	
Startin	Starting method			_	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			-	Electronic expansion valve	
	gerant			R41		
Quan	-		kg	-	7.2 [Pre-charged up to the piping length of 30m]	
	gerant oil	-	l	-	1.45 (M-MA32R)	
	st control			Microcomputer c	ontrolled de-icer	
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan $\times 2$	
Motor			W	140 × 1	86 × 2	
Startir	g method			Direct line start	Direct line start	
Air flo	ow.		СММ	Hi:30 Me:27 Lo:23	Cooling: 150, Heating: 145	
Outsi	de air intake			Possible	-	
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	_	
	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	c heater		W	-	33 (Crank case heater)	
Opera	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)	
Room	temperature control			Thermostat by electronics	_	
Safet	y equipment	1		Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Installation data Liquid line Refrigerant piping size Gas line ⁽⁶⁾		Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8	12.7(1/2")×0.8 O/U 12.7(1/2")	
		Gas line ⁽⁶⁾	(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	22.22(7/8")×1.6 O/U 22.22(7/8")	
	Connecting method			Flare piping (Outdoor	gas piping: Brazing)	
Conn				Connectable with VP20 (I.D. 20mm, O.D. 26mm) Holes size $\phi 20 \times 3$ pcs		
	hose				· ·	
Drain	-			Connectable with VP20 (I.D. 20mm, O.D. 26mm) Necessary (both L	· · ·	
Drain	hose tion for piping				iquid & Gas lines) e see 1.5.3), Accessory pipe (Please see 1.5.3)	

Notes (1) The data are measured at the following conditions.

5 (1)	The data are measured at	the following conditions.				
	Item	Indoor air t	emperature	Outdoor air	temperature	Standards
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-WB1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(c) Triple type

Model FDT140VNTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model	FDT14	IOVNTV	
Item				FDT50V	FDC140VN	
Nomin	al cooling capacity	1)	kW	14.0 [5	.0~14.5]	
Nomin	al heating capacity	1)	kW	16.0 [4.0~16.5]		
Power	source			1 Phase, 220-240V 50Hz/220V 60Hz		
	Cooling power consum	ption	kW	4.65	5/4.65	
	Running current (Cooli	ng)	А	20.8/22.1		
Ita ⁽³⁾	Power factor (Cooling)		%	97/96		
Operation data ⁽³⁾	Heating power consum	ption	kW	4.63/4.63		
atio	Running current (Heating)		А	20.3/21.2		
Dper	Power factor (Heating)		%	99)/99	
-	Inrush current (L.R.A) <max. current="" running=""></max.>		А	5 <	:24>	
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	51	
xterio	or dimensions			Unit 246 × 840 × 840	845 × 970 × 370	
Height \times Width \times Depth			mm	Panel 35 × 950 × 950	645 × 970 × 370	
let we	-		kg	27.5 (Unit:22 Panel:5.5)	74	
	erant equipment ressor type & Q'ty			-	RMT5126MDE2 × 1	
tarting	method			-	Direct line start	
leat e	xchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
efrige	rant control			_	Electronic expansion valve	
lefrige	erant			R4	10A	
luanti			kg	-	3.8 [Pre-charged up to the piping length of 30n	
	erant oil		l	– 0.9 (M-MA68)		
	control			Microcomputer controlled de-icer		
	ndling equipment e & Q'ty			Turbo fan × 1	Propeller fan × 1	
lotor			W	50 × 1	86 × 1	
tarting	method			Direct line start	Direct line start	
ir flo	N		СММ	Hi:18 Me:16 Lo:14	Cooling: 75, Heating: 73	
outsid	e air intake			Possible	-	
Air filte	er, Q'ty			Pocket plastic net \times 1 (washable)	-	
	k vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	heater		W	-	20 (Crank case heater)	
	ion control on switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)	
Room te	emperature control			Thermostat by electronics	-	
Safety	equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
nstalla	ation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.		
Refrigerant piping size Gas line		(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")		
Connecting method			Flare	piping		
Drain h	nose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
nsulati	on for piping			Necessary (both I	Liquid & Gas lines)	
Accesso	ories			Mounting k	it. Drain hose	
Optiona	l parts			Decorative Pane	el (T-PSA-36W-E)	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	180 T1
Heating	20)°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) Branching pipe set "DIS-TA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDT140VSTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model	FDT14	OVSTV			
Item			Widder	FDT50V FDC140VS				
Nomi	nal cooling capacity ⁽¹⁾		kW	14.0 [5.0~14.5]				
Nomi	nal heating capacity ⁽¹⁾		kW	16.0 [4.0~16.5]				
Powe	r source			3 Phase, 380-415	V 50Hz/380V 60Hz			
	Cooling power consumption		kW	4.65/4.65				
	Running current (Cooling	g)	А	6.9/7.4				
Ita ⁽³⁾	Power factor (Cooling)		%	97	/95			
n da	Heating power consumption		kW	4.63	/4.63			
Operation data ⁽³⁾	Running current (Heating	g)	А	6.8	/7.1			
Ope	Power factor (Heating)		%	98	/99			
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>15></td></m<>	ax. running current>	А	5 <	15>			
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	51			
	ior dimensions nt × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	845 × 970 × 370			
Net w	veight		kg	27.5 (Unit:22 Panel:5.5)	74			
	lefrigerant equipment compressor type & Q'ty			_	RMT5126MDE3 × 1			
Startir	Starting method			_	Direct line start			
Heat	leat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrig	frigerant control			-	Electronic expansion valve			
Refri	efrigerant			R4	10A			
Quan	Quantity		kg	-	3.8 [Pre-charged up to the piping length of 30m]			
Refri	gerant oil		l	-	0.9 (M-MA68)			
	st control			Microcomputer	controlled de-icer			
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 1			
Motor			W	50 × 1	86 × 1			
Startin	ng method			Direct line start	Direct line start			
Air flo	w		СММ	Hi:18 Me:16 Lo:14	Cooling: 75, Heating: 73			
Outsi	de air intake			Possible	-			
Air fil	ter, Q'ty			Pocket plastic net \times 1 (washable)	-			
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electr	ic heater		W	-	20 (Crank case heater)			
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	– (Indoor unit side)			
Room	Room temperature control			Thermostat by electronics	-			
Safety equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.				
Insta	llation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")			
Refrigerant piping size		Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")			
Connecting method				piping				
	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs			
Insula	tion for piping			Necessary (both Liquid & Gas lines)				
Acces	sories			8	t. Drain hose			
Optional parts				Decorative Panel (T-PSA-36W-E)				

Notes (1) The data are measured at the following conditions.

- (-)	/								
	Item	Indoor air temperature		Outdoor air temperature		Stendende			
	Operation	DB	WB	DB	WB	Standards			
	Cooling	27°C	19°C	35°C	24°C	150 T1			
	Heating	20°C		7°C	6°C	ISO-T1			

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) Branching pipe set "DIS-TA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(c) Triple type

Model FDT200VSTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model	FDT20	OVSTV			
Item			Widder	FDT71V	FDC200VS			
Nomi	nal cooling capacity ⁽¹)	kW	20.0 [7.	0~22.4]			
Nominal heating capacity ⁽¹⁾ kV			kW	22.4 [7.6~25.0]				
Powe	er source			3 Phase, 380-415\	/ 50Hz/380V 60Hz			
	Cooling power consum	ption	kW	6.49/6.49				
	Running current (Cooli	ng)	А	9.7/1	0.2			
lta ⁽³⁾	Power factor (Cooling)		%	97/	97			
Operation data ⁽³⁾	Heating power consump	ption	kW	6.12/	6.12			
ratic	Running current (Heating	ng)	А	9.1/9	0.6			
Ope	Power factor (Heating)		%	97/	97			
	Inrush current (L.R.A) <n< td=""><td>Max. running current></td><td>А</td><td>5 <1</td><td>9></td></n<>	Max. running current>	А	5 <1	9>			
	Noise level		dB(A)	Hi:35 Me:33 Lo:31	57			
	ior dimensions nt × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	1300 × 970 × 370			
-	/eight		kg	29.5 (Unit:24 Panel:5.5)	122			
	gerant equipment pressor type & Q'ty			-	GTC5150ND70K × 1			
Startin	Starting method			-	Direct line start			
Heat	Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrigerant control			-	Electronic expansion valve				
Refri	gerant			R41	0A			
Quan	tity		kg	_	5.4 [Pre-charged up to the piping length of 30m]			
Refri	gerant oil		l	-	1.45 (M-MA32R)			
Defro	st control			Microcomputer controlled de-icer				
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan $\times 2$			
Motor			W	50 × 1	86 × 2			
Startii	ng method			Direct line start	Direct line start			
Air fl	ow		СММ	Hi:21 Me:19 Lo:17	Cooling: 150, Heating: 145			
Outs	ide air intake			Possible	-			
Air fi	lter, Q'ty			Pocket plastic net × 1 (washable)	-			
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electr	ic heater		W	-	33 (Crank case heater)			
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)			
Room	temperature control			Thermostat by electronics	-			
Safet	y equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.			
Insta	llation data	Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")			
Refri	gerant piping size	Gas line (6)	(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	22.22(7/8")×1.6 O/U 22.22(7/8")			
Connecting method			Flare piping (Outdoor	gas piping: Brazing)				
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $20 \times 3 \text{ pcs}$			
Insula	tion for piping			Necessary (both Li	quid & Gas lines)			
Acces	sories			Mounting kit. Drain hose, Reducer kit, (Please see 1.5.3), Accessory pipe (Please see 1.5.3)				
Optional parts				Decorative Panel	(T-PSA-36W-E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air temperature		Standards	
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	190 T1	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-TB1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(d) Double twin type

Model FDT200VSDV (Indoor unit: 4 units, Outdoor unit: 1 unit)

			Model	FDT200	IVSDV		
Item			model	FDT50V	FDC200VS		
Nomi	nal cooling capacity(1)		kW	20.0 [7.0)~22.4]		
Nominal heating capacity ⁽¹⁾ kW			kW	22.4 [7.6~25.0]			
Powe	r source			3 Phase, 380-415V	/ 50Hz/380V 60Hz		
Cooling power consumption		kW	6.58/6.58				
	Running current (Coolin	ig)	А	9.8/	10.3		
lta ⁽³⁾	Power factor (Cooling)		%	97/97			
Operation data ⁽³⁾	Heating power consump	tion	kW	6.15/	6.15		
ratio	Running current (Heatin	g)	А	9.2/	9.6		
ope	Power factor (Heating)		%	97/	97		
Ū	Inrush current (L.R.A) <m< td=""><td>lax. running current></td><td>А</td><td>5 <1</td><td>9></td></m<>	lax. running current>	А	5 <1	9>		
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	57		
	ior dimensions		mm	Unit 246 × 840 × 840	1300 × 970 × 370		
	nt × Width × Depth		ka	Panel 35 × 950 × 950	122		
	eight gerant equipment		kg	27.5 (Unit:22 Panel:5.5)	122		
	pressor type & Q'ty			—	GTC5150ND70K × 1		
Starting method			-	Direct line start			
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrigerant control			-	Electronic expansion valve			
Refri	gerant			R41			
Quan			kg	-	5.4 [Pre-charged up to the piping length of 30m]		
	gerant oil		l	_	1.45 (M-MA32R)		
	st control			Microcomputer controlled de-icer			
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan $\times 2$		
Motor			W	50 × 1	86 × 2		
Startir	g method			Direct line start	Direct line start		
Air flo	ow.		СММ	Hi:18 Me:16 Lo:14	Cooling: 150, Heating: 145		
Outsi	de air intake			Possible	_		
Air fil	ter, Q'ty			Pocket plastic net × 1 (washable)	-		
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electr	c heater		W	_	33 (Crank case heater)		
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-T-36W-E)	- (Indoor unit side)		
-	temperature control			Thermostat by electronics	_		
Safety equipment				Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor.		
Incto	llation data	Liquid line		I/U 6.35(1/4") 9.52(3/8")×0.8	Anomalous discharge temperature protection. 9.52(3/8")×0.8 O/U 9.52(3/8")		
	llation data gerant piping size	Gas line	mm (in)	I/U 12.7(1/2") 12.7×0.8 15.88	22.22(7/8")×1.6 O/U 22.22(7/8")		
Connecting method			Flare piping (Outdoor gas piping: Brazing)				
Drain	hose			Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $20 \times 3 \text{ pcs}$		
Insula	tion for piping			Necessary (both Liqu	iid & Gas lines)		
Acces	sories			Mounting kit. Drain hose, Reducer kit, (Please see 1.5.3), Accessory pipe (Please see 1.5.3)			
Optional parts				Decorative Panel	(T-PSA-36W-E)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	Cooling 27°C		35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where four indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-WB1" × 1, "DIS-WA1" × 2(option). Pipe :O/U~Branch, :Branch~Branch, :Branch~I/U

Model FDT250VSDV (Indoor unit: 4 units, Outdoor unit: 1 unit)

			Model	FDT25	0VSDV	
Item			Woder	FDT60V	FDC250VS	
Nomi	nal cooling capacity(1)		kW	25.0 [10.0~28.0]		
Nomi	nal heating capacity ⁽¹⁾		kW	28.0 [9.5~31.5]		
Power source				3 Phase, 380-415V 50Hz/380V 60Hz		
	Cooling power consump	tion	kW	8.28	/8.28	
-	Running current (Coolin	lg)	А	12.8	/13.4	
ata ⁽³⁾	Power factor (Cooling)		%	97,	/97	
p nc	Heating power consumption		kW	7.70	/7.70	
Operation data ⁽³⁾	Running current (Heatin	g)	А	11.5	/12.1	
do	Power factor (Heating)		%	97.	/97	
	Inrush current (L.R.A) <m< td=""><td>lax. running current></td><td>А</td><td>5 <</td><td>22></td></m<>	lax. running current>	А	5 <	22>	
	Noise level		dB(A)	Hi:33 Me:31 Lo:30	Cooling:57, Heating: 58	
	ior dimensions nt × Width × Depth		mm	Unit 246 × 840 × 840 Panel 35 × 950 × 950	1505 × 970 × 370	
	eight		kg	29.5 (Unit:24 Panel:5.5)	140	
	efrigerant equipment ompressor type & Q'ty			_	GTC5150ND70K × 1	
Startir	Starting method			_	Direct line start	
Heat	Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
	gerant			R4 ⁻		
Quan			kg	-	7.2 [Pre-charged up to the piping length of 30m]	
	gerant oil		l	_	1.45 (M-MA32R)	
	st control			Microcomputer o	controlled de-icer	
	andling equipment pe & Q'ty			Turbo fan × 1	Propeller fan × 2	
Motor			W	50 × 1	86 × 2	
Startir	ig method			Direct line start	Direct line start	
Air fl			СММ	Hi:18 Me:16 Lo:14	Cooling: 150, Heating: 145	
	de air intake			Possible	-	
	ter, Q'ty			Pocket plastic net × 1 (washable)	-	
	& vibration absorber		XX 7	Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Oper	ation control		W	- Wired remote control switch (Optional : RC-E3)	33 (Crank case heater) – (Indoor unit side)	
•	tion switch temperature control			Wireless kit (Optional : RCN-T-36W-E) Thermostat by electronics		
Safety equipment			Overload protection for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Ineta	llation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	12.7(1/2")×0.8 O/U 12.7(1/2")	
	gerant piping size	Gas line ⁽⁶⁾	(in)	I/U 12.7(1/2") 12.7×0.8 15.88		
Connecting method			Flare piping (Outdoor	r gas piping: Brazing)		
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
Insula	tion for piping			Necessary (both Liquid & Gas lines)		
Acces	sories			Mounting kit. Drain hose, Reducer kit, (Please see 1.5.3), Accessory pipe (Please see 1.5.3)		
Optional parts				Decorative Panel (T-PSA-36W-E)		

Notes (1) The data are measured at the following conditions.

· · ·		8				
	Item	Indoor air t	emperature	Outdoor air temperature		Ctou doudo
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Heating	20°C		7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where four indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-WB1" × 1, "DIS-WA1" × 2 (option). Pipe :O/U~Branch, :Branch~Branch, :Branch~I/U

(3) Ceiling suspended type (FDEN)

(a) Single type

Model FDEN40ZHXV

Item		Model		OZHXV			
	ingl appling appositu(1)	1-W/	FDEN40V	SRC40ZHX-S			
	inal cooling capacity ⁽¹⁾ inal heating capacity ⁽¹⁾	kW kW	<u>4.0 [1.8~4.7]</u> 4.5 [2.0~5.4]				
	er source	K VV		V 50Hz/220V 60Hz			
0110	Cooling power consumption	kW	1.04/1.04				
	Running current (Cooling)	A	4.7/4.8				
(3)							
data	Power factor (Cooling)	%	97/98				
Operation data ⁽³⁾	Heating power consumption	kW	1.13	/1.13			
erati	Running current (Heating)	А	5.1/5.3				
Ope	Power factor (Heating)	%	97/97				
	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	12>			
	Noise level	dB(A)	Hi:39 Me:38 Lo:37	47			
	rior dimensions	mm	210 × 1070 × 690	640 × 800 × 290			
-	ht × Width × Depth						
	veight	kg	30	43			
	gerant equipment pressor type & Q'ty		-	5CS130XG04 × 1			
Startir	ng method		_	Direct line start			
leat	exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing			
Refrig	gerant control		_	Electronic expansion valve			
Refri	gerant		R4 ⁻	10A			
Quan	•	kg		1.4 [Pre-charged up to the piping length of 15n			
	gerant oil	l		0.48 (RB68A)			
	st control		Microcomputer controlled de-icer				
	andling equipment /pe & Q'ty		Centrifugal fan × 2	Propeller fan × 1			
Aotor	ſ	W	25 × 1	45 × 1			
tartir	ng method		Direct line start	Direct line start			
Air fl	ow	СММ	Hi:11 Me:9 Lo:7	40			
Outsi	ide air intake		Not possible	-			
Air fil	lter, Q'ty		Pocket plastic net × 2 (washable)	-			
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	ic heater	W		_			
	ation control tion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)			
	temperature control		Thermostat by electronics	_			
	y equipment		Internal thermostat for fan motor.	Internal thermostat for fan motor.			
nsta	llation data gerant piping size	mm (in)	Frost protection thermostat.	Anomalous discharge temperature protection Gas line: φ12.7 (1/2")			
Connecting method		Flare piping					
	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 5$ pcs			
	tion for piping			iquid & Gas lines)			
	sories			t. Drain hose			
	nal parts			_			

Item	Indoor air t	nperature Outdoor air temperature			Standards
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20)°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDEN50ZHXV

		Model	FDEN5	0ZHXV	
Item			FDEN50V	SRC50ZHX-S	
Nomin	al cooling capacity ⁽¹⁾	kW	5.0 [2.	2~5.6]	
Nomin	al heating capacity ⁽¹⁾	kW	5.4 [2.5~6.3]		
Power	source		1 Phase, 220-240V 50Hz/220V 60Hz		
	Cooling power consumption	kW	1.59/1.59		
	Running current (Cooling)	А	7.1/	/7.5	
Ita ⁽³⁾	Power factor (Cooling)	%	97/97		
n da	Heating power consumption	kW	1.58/1.58		
Operation data ⁽³⁾	Running current (Heating)	А	7.0	/7.3	
Ope	Power factor (Heating)	%	98/	/98	
	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	14>	
	Noise level	dB(A)	Hi:39 Me:38 Lo:37	47	
	or dimensions t × Width × Depth	mm	210 × 1070 × 690	640 × 800 × 290	
Net we		kg	30	43	
	erant equipment ressor type & Q'ty		-	5CS130XG04 × 1	
Starting	g method		_	Direct line start	
leat e	xchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing	
Refrige	rant control		_	Electronic expansion valve	
Refrig	erant		R41	10A	
Quant	ity	kg	_	1.4 [Pre-charged up to the piping length of 15m	
Refrig	erant oil	l		0.48 (RB68A)	
Defrost	control		Microcomputer controlled de-icer		
	ndling equipment e & Q'ty		Centrifugal fan × 2	Propeller fan × 1	
Motor		W	25 × 1	45 × 1	
Starting	g method		Direct line start	Direct line start	
Air flo	w	CMM	Hi:11 Me:9 Lo:7	40	
Outsic	le air intake		Not possible	_	
Air filt	er, Q'ty		Pocket plastic net × 2 (washable)	-	
Shock a	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electric	e heater	W	_	20 (Crank case heater)	
	tion control on switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)	
Room t	emperature control		Thermostat by electronics	_	
Safety	equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	ation data erant piping size	mm (in)	Liquid line: \(\phi 6.35 (1/4") Gas line: \(\phi 12.7 (1/2"))		
Conne	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 5$ pcs	
Insulati	on for piping		Necessary (both L	iquid & Gas lines)	
Access	ories		Mounting ki	t. Drain hose	
Ontion	al parts		-	-	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Stendende	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDEN60ZHXV

		Model	FDEN6	0ZHXV		
Item			FDEN60V	SRC60ZHX-S		
Nomi	nal cooling capacity ⁽¹⁾	kW	5.6 [2.	8~6.3]		
Nomi	nal heating capacity ⁽¹⁾	kW	6.7 [3.	1~7.1]		
Powe	r source		1 Phase, 220-240	V 50Hz/220V 60Hz		
Cooling power consumption		kW	1.95/1.95			
	Running current (Cooling)	А	8.7/9.7			
ta ⁽³⁾	Power factor (Cooling)	%	97/96			
Operation data ⁽³⁾	Heating power consumption	kW	2.12/2.12			
ratio	Running current (Heating)	А	9.4/9.8			
Dpe	Power factor (Heating)	%	98/98			
Ŭ	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	14>		
	Noise level	dB(A)	Hi:41 Me:39 Lo:38	48		
	ior dimensions It × Width × Depth	mm	210 × 1320 × 690	640 × 800 × 290		
	eight	kg	36	43		
	gerant equipment pressor type & Q'ty		_	5CS130XG04 × 1		
Startir	g method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing		
Refrig	erant control		-	Electronic expansion valve		
Refri	gerant		R4	10A		
Quan	tity	kg		1.4 [Pre-charged up to the piping length of 15m		
Refri	gerant oil	l		0.48 (RB68A)		
Defros	st control		Microcomputer controlled de-icer			
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan × 1		
Motor		W	20 × 2	45 × 1		
Startir	g method		Direct line start	Direct line start		
Air flo	w	СММ	Hi:18 Me:14 Lo:12	40		
Outsi	de air intake		Not possible	_		
Air fil	ter, Q'ty		Pocket plastic net × 2 (washable)	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electr	c heater	W	_	_		
	ation control tion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics	_		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	lation data gerant piping size	mm (in)	Liquid line: \(\phi.35 (1/4")) Gas line: \(\phi12.7 (1/2"))			
Connecting method			Flare	piping		
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 5$ pcs		
Insula	tion for piping		Necessary (both L	iquid & Gas lines)		
Accessories			Mounting kit. Drain hose			
Acces	501105					

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	190 71	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDEN71VNV

		Model	FDEN	71VNV	
Item			FDEN71V	FDC71VN	
Nominal cooling capacity ⁽¹⁾		kW	7.1[3.	2~8.0]	
Nominal heating capacity ⁽¹⁾		kW	8.0[3.	6~9.0]	
Powe	r source		1 Phase, 220-240	V 50Hz/220V 60Hz	
	Cooling power consumption	kW	2.01/2.01		
	Running current (Cooling)	А	8.9/	/9.2	
ata ⁽³⁾	Power factor (Cooling)	%	98/99		
in di	Heating power consumption	kW	2.21/2.21		
Operation data ⁽³⁾	Running current (Heating)	А	9.8/	10.2	
Ope	Power factor (Heating)	%	98/98		
	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	17>	
	Noise level	dB(A)	Hi:41 Me:39 Lo:38	48	
	ior dimensions nt × Width × Depth	mm	210 × 1320 × 690	750 × 968 × 340	
Net w	reight	kg	36	60	
	gerant equipment pressor type & Q'ty		-	2YC45DXD × 1	
Startir	ng method		-	Direct line start	
Heat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
	erant control		-	Electronic expansion valve	
Refri	gerant		R41	10A	
Quan	tity	kg	_	2.95 [Pre-charged up to the piping length of 30n	
Refri	gerant oil	l	-	0.65 (FVC50K)	
	st control		Microcomputer of	controlled de-icer	
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan \times 1	
Motor		W	20 × 2	86 × 1	
Startir	ng method		Direct 1	ine start	
Air flo	- DW	СММ	Hi:18 Me:14 Lo:12	Cooling:60 Heating:50	
Outsi	de air intake		Not possible	_	
Air fil	ter, Q'ty		Pocket plastic net × 2 (washable)	_	
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electr	ic heater	W	_	20 (Crank case heater)	
	ation control tion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)	
Room	temperature control		Thermostat by electronics	_	
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)	Liquid line: φ9.52 (3/8″) Gas line: φ15.88 (5/8″)		
Conn	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 3$ pcs	
Insula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Mounting ki	t. Drain hose	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Cto a doudo		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	160 T1	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"
(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDEN100VNV

		Model	FDEN1	00VNV		
Item			FDEN100V	FDC100VN		
Nomi	nal cooling capacity ⁽¹⁾	kW	10.0 [4.	0~11.2]		
Nomi	nal heating capacity ⁽¹⁾	kW	11.2 [4.	0~12.5]		
Powe	r source		1 Phase, 220-240	/ 50Hz/220V 60Hz		
	Cooling power consumption		2.85/2.85			
	Running current (Cooling)	А	12.5/13.1			
ta ⁽³⁾	Power factor (Cooling)	%	99/99			
Operation data ⁽³⁾	Heating power consumption	kW	2.97/2.97			
atio	Running current (Heating)	А	13.0/13.6			
ber	Power factor (Heating)	%	99,	99/99		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>		
	Noise level	dB(A)	Hi:44 Me:41 Lo:39	49		
	ior dimensions	mm	250 × 1620 × 690	845 × 970 × 370		
-	nt × Width × Depth reight	ka	46	74		
	gerant equipment	kg	40			
	pressor type & Q'ty		-	RMT5126MDE2 × 1		
Startin	ng method		-	Direct line start		
Heat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control		-	Electronic expansion valve		
Refrig	gerant		R4 ⁻	10A		
Quan	tity	kg	-	3.8 [Pre-charged up to the piping length of 30r		
Refri	gerant oil	l	-	0.9 (M-MA68)		
Defros	st control		Microcomputer controlled de-icer			
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan × 1		
Motor		W	30 × 2	86 × 1		
Startin	ng method		Direct line start	Direct line start		
Air flo	w	СММ	Hi:26 Me:23 Lo:21	Cooling: 75, Heating: 73		
Outsi	de air intake		Not possible	_		
Air fil	ter, Q'ty		Pocket plastic net $\times 2$ (washable)	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	ic heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)		
-	temperature control		Thermostat by electronics	_		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectio		
	llation data gerant piping size	mm (in)	Liquid line: (+9.52 (3/8") Gas line: (+15.88 (5/8")			
Connecting method		. ,	Flare	piping		
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$		
Insula	tion for piping		Necessary (both L	iquid & Gas lines)		
Accessories			Mounting kit. Drain hose			
Acces	sories		informing in	. Drum nose		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating	20	°C	7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDEN100VSV

		Model	FDEN1	00VSV	
Item			FDEN100V	FDC100VS	
Nomina	al cooling capacity ⁽¹⁾	kW	10.0 [4.	0~11.2]	
Nomina	al heating capacity ⁽¹⁾	kW	11.2 [4.	0~12.5]	
Power	source		3 Phase, 380-415	V 50Hz/380V 60Hz	
	Cooling power consumption	kW	2.85/2.85		
	Running current (Cooling)	А	4.2/4.4		
ta ⁽³⁾	Power factor (Cooling)	%	98/98		
Operation data ⁽³⁾	Heating power consumption	kW	2.97/2.97		
atio	Running current (Heating)	А	4.3/4.6		
ber	Power factor (Heating)	%	99,	/98	
	nrush current (L.R.A) <max. current="" running=""></max.>	А	5<	15>	
H	Noise level	dB(A)	Hi:44 Me:41 Lo:39	49	
	r dimensions				
	× Width × Depth	mm	250 × 1620 × 690	845 × 970 × 370	
Net we	ight	kg	46	74	
	rant equipment essor type & Q'ty		-	RMT5126MDE3 × 1	
Starting	method		-	Direct line start	
Heat ex	changer		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refriger	ant control		-	Electronic expansion valve	
Refrige	rant		R4 ⁻	10A	
Quanti	ty	kg	_	3.8 [Pre-charged up to the piping length of 30n	
Refrige	rant oil	l	-	0.9 (M-MA68)	
Defrost			Microcomputer controlled de-icer		
	dling equipment e & Q'ty		Centrifugal fan × 4	Propeller fan × 1	
Motor		W	32 × 2	86 × 1	
Starting	method		Direct line start	Direct line start	
Air flov	V	СММ	Hi:26 Me:23 Lo:21	Cooling: 75, Heating: 73	
Outsid	e air intake		Not possible	-	
Air filte	r, Q'ty		Pocket plastic net × 2 (washable)	-	
Shock &	vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electric	heater	W	-	20 (Crank case heater)	
	i on control on switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)	
Room te	mperature control		Thermostat by electronics	-	
Safety	equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	tion data rant piping size	mm (in)	Liquid line:	Gas line:	
Conne	cting method		Flare	piping	
Drain h	ose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insulatio	on for piping		Necessary (both L	iquid & Gas lines)	
Accesso	ries		Mounting ki	t. Drain hose	
Optiona	parts				

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature Outdoor		temperature	Stendende	
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	150 71	
Heating		°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

Model FDEN125VNV

		Model	FDEN1	25VNV				
Item			FDEN125V	FDC125VN				
Nominal cooling capacity ⁽¹⁾ kW			12.5 [5.0~14.0]					
Nomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.	0~16.0]				
Powe	r source		1 Phase 220-240\	/ 50Hz/220V 60Hz				
	Cooling power consumption	kW	4.10/4.10					
	Running current (Cooling)	А	18.0/	/18.8				
ta ⁽³⁾	Power factor (Cooling)	%	99,	/99				
Operation data ⁽³⁾	Heating power consumption	kW	3.65/	/3.65				
atio	Running current (Heating)	А	16.0/	16.0/16.8				
ber	Power factor (Heating)	%	99,	/99				
0	Inrush current (L.R.A) <max. current="" running=""></max.>	A	5 <					
	Noise level	dB(A)	Hi:46 Me:44 Lo:43	Cooling: 50, Heating: 51				
Exter	ior dimensions	ub(//)						
	nt × Width × Depth	mm	250 × 1620 × 690	845 × 970 × 370				
Net w	/eight	kg	46	74				
	gerant equipment oressor type & Q'ty		-	RMT5126MDE2 × 1				
Startin	ng method		-	Direct line start				
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrigerant control			-	Electronic expansion valve				
Refrigerant			R41	10A				
Quantity		kg	-	3.8 [Pre-charged up to the piping length of 30r				
Refrigerant oil		l	-	0.9 (M-MA68)				
	st control		Microcomputer of	controlled de-icer				
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan × 1				
Motor		W	40 × 2	86 × 1				
	ng method	**	Direct line start	Direct line start				
Air flo	5	СММ	Hi:29 Me:26 Lo:23	Cooling: 75, Heating: 73				
	ide air intake	•	Not possible					
	lter, Q'ty		Pocket plastic net × 2 (washable)					
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)				
	ic heater	W	_	20 (Crank case heater)				
Opera	ation control tion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)				
-	temperature control		Thermostat by electronics	_				
	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectio				
	llation data gerant piping size	mm (in)	Liquid line: \$9.52 (3/8")	Gas line: φ15.88 (5/8″)				
Conn	ecting method		Flare	piping				
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$				
Insula	tion for piping		Necessary (both L	iquid & Gas lines)				
Acces	sories		Mounting ki	t. Drain hose				

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	100 71	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDEN125VSV

		Model	FDEN1	25VSV		
Item			FDEN125V	FDC125VS		
Nominal cooling capacity ⁽¹⁾ kW			12.5 [5.0~14.0]			
Nomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.	0~16.0]		
Powe	r source		3 Phase 380-415	/ 50Hz/380V 60Hz		
	Cooling power consumption	kW	4.10/4.10			
	Running current (Cooling)	А	6.1/6.3			
Ita ⁽³⁾	Power factor (Cooling)	%	97/99			
Operation data ⁽³⁾	Heating power consumption	kW	3.65	/3.65		
atio	Running current (Heating)	А	5.4	/5.6		
ber	Power factor (Heating)	%	98	/99		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>		
	Noise level	dB(A)	Hi:46 Me:44 Lo:43	Cooling: 50, Heating: 51		
	ior dimensions It × Width × Depth	mm	250 × 1620 × 690	845 × 970 × 370		
-	eight	kg	46	74		
	gerant equipment pressor type & Q'ty		-	RMT5126MDE3 × 1		
Starting method			_	Direct line start		
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrigerant control			_	Electronic expansion valve		
Refrigerant			R4	10A		
Quantity		kg	-	3.8 [Pre-charged up to the piping length of 30n		
Refriç	gerant oil	l	-	0.9 (M-MA68)		
Defros	st control		Microcomputer of	controlled de-icer		
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan × 1		
Motor		W	40 × 2	86 × 1		
Startin	g method		Direct line start	Direct line start		
Air flo	w	СММ	Hi:29 Me:26 Lo:23	Cooling: 75, Heating: 73		
Outsi	de air intake		Not possible	-		
Air fil	ter, Q'ty		Pocket plastic net × 2 (washable)	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	c heater	W	-	20 (Crank case heater)		
	ation control tion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics	_		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	lation data gerant piping size	mm (in)	Liquid line: 69.52 (3/8 ″)	Gas line: φ15.88 (5/8″)		
Conn	ecting method		Flare	piping		
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 3$ pcs		
Insulat	tion for piping		Necessary (both L	iquid & Gas lines)		
Access	sories		Mounting ki	t. Drain hose		
Option	al parts		-	-		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	160 T1	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

Model FDEN140VNV

		Model	FDEN1	40VNV	
Item		model	FDEN140V	FDC140VN	
Nomir	nal cooling capacity ⁽¹⁾	kW	14.0 [5.	0~14.5]	
Nomir	nal heating capacity ⁽¹⁾	kW	16.0 [4.	0~16.5]	
Power	source		1 Phase, 220-240	V 50Hz/220V 60Hz	
	Cooling power consumption	kW	4.98/4.98		
	Running current (Cooling)	А	22.0	/23.0	
ta ⁽³⁾	Power factor (Cooling)	%	98,	/98	
Operation data ⁽³⁾	Heating power consumption	kW	4.69	/4.69	
atio	Running current (Heating)	А	20.5	/21.5	
ber	Power factor (Heating)	%	99,	/99	
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>	
	Noise level	dB(A)	Hi:46 Me:44 Lo:43	51	
Exteri	or dimensions				
	t × Width × Depth	mm	250 × 1620 × 690	845 × 970 × 370	
Net w	eight	kg	46	74	
-	erant equipment ressor type & Q'ty		-	RMT5126MDE2 × 1	
Starting method			-	Direct line start	
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrigerant control			-	Electronic expansion valve	
Refrigerant			R4 ⁻	10A	
Quantity		kg	-	3.8 [Pre-charged up to the piping length of 30n	
Refrigerant oil		l	-	0.9 (M-MA68)	
	t control		Microcomputer of	controlled de-icer	
	ndling equipment be & Q'ty		Centrifugal fan × 4	Propeller fan × 1	
Motor		W	40 × 2	86 × 1	
Starting	g method		Direct line start	Direct line start	
Air flo	w	СММ	Hi:29 Me:26 Lo:23	Cooling: 75, Heating: 73	
Outsid	de air intake		Not possible	_	
Air filt	er, Q'ty		Pocket plastic net $\times 2$ (washable)	_	
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	c heater	W	_	20 (Crank case heater)	
	tion control ion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)	
Room	temperature control		Thermostat by electronics	_	
Safety	v equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectio	
	ation data erant piping size	mm (in)	Liquid line: \$9.52 (3/8″)	Gas line: φ15.88 (5/8″)	
Conne	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$	
Insulat	ion for piping		Necessary (both L	iquid & Gas lines)	
Access	ories		Mounting ki	t. Drain hose	
Option	al parts		-	-	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	150 T1	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDEN140VSV

		Model	FDEN1	40VSV		
Item			FDEN140V	FDC140VS		
Nomi	nal cooling capacity ⁽¹⁾	kW	14.0 [5.	14.0 [5.0~14.5]		
Nomi	nal heating capacity ⁽¹⁾	kW	16.0 [4.	0~16.5]		
Powe	r source		3 Phase, 380-415	V 50Hz/380V 60Hz		
	Cooling power consumption	kW	4.98/4.98			
	Running current (Cooling)	А	7.4	/7.8		
Operation data ⁽³⁾	Power factor (Cooling)	%	97	/97		
n da	Heating power consumption	kW	4.69	/4.69		
atio	Running current (Heating)	А	6.8	/7.2		
Der	Power factor (Heating)	%	99,	/99		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>		
	Noise level	dB(A)	Hi:46 Me:44 Lo:43	51		
	ior dimensions It × Width × Depth	mm	250 × 1620 × 690	845 × 970 × 370		
-	eight	kg	46	74		
	gerant equipment pressor type & Q'ty		_	RMT5126MDE3 × 1		
Startin	Starting method		_	Direct line start		
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrigerant control			_	Electronic expansion valve		
Refrigerant			R4	10A		
Quantity		kg	-	3.8 [Pre-charged up to the piping length of 30n		
Refrig	gerant oil	l	-	0.9 (M-MA68)		
Defros	st control		Microcomputer of	controlled de-icer		
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan × 1		
Motor		W	40 × 2	86 × 1		
Startin	g method		Direct line start	Direct line start		
Air flo	bw	СММ	Hi:29 Me:26 Lo:23	Cooling: 75, Heating: 73		
Outsi	de air intake		Not possible	_		
Air fil	ter, Q'ty		Pocket plastic net × 2 (washable)	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	c heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics	_		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectio		
	lation data gerant piping size	mm (in)	Liquid line: _{\$} 9.52 (3/8″)	Gas line:		
Conn	ecting method		Flare	piping		
Drain	hose		Connectable with VP20 (I.D.20mm, O.D.26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$		
Insulat	tion for piping		Necessary (both L	iquid & Gas lines)		
Access	sories		Mounting ki	t. Drain hose		
Optior	nal parts					

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Ston doudo		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	100 71	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(b) Twin type

Model FDEN71VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

btion g) stion g) ax. running current>	kW kW kW A % kW A % A dB(A) mm kg	FDEN40V 7.1[3.2 8.0[3.6 1 Phase, 220-240V 1.74/ 7.6/ 99/ 1.84/ 8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37 210 × 1070 × 690	5-9.0] 7 50Hz/220V 60Hz 1.74 8.0 99 1.84 8.5 98	
ng) bition g)	kW kW A % kW A % A dB(A) mm	8.0[3.6 1 Phase, 220-240V 1.74/ 7.6/ 99/ 1.84/ 8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37	5-90] 7 50Hz/220V 60Hz 1.74 8.0 99 1.84 8.5 98 17>	
ng) bition g)	kW A % kW A % A dB(A) mm	1 Phase, 220-240V 1.74/ 7.6/ 99/ 1.84/ 8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37	Y 50Hz/220V 60Hz 1.74 8.0 99 1.84 8.5 98 17>	
ng) bition g)	A % kW A % A dB(A) mm	1.74/ 7.6/ 99/ 1.84/ 8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37	1.74 8.0 99 1.84 8.5 98 17>	
ng) bition g)	A % kW A % A dB(A) mm	7.6/ 99/ 1.84/ 8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37	8.0 99 1.84 8.5 98 7>	
otion (g)	% kW A % A dB(A) mm	99/ 1.84/ 8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37	99 1.84 8.5 98 7>	
ng)	kW A % A dB(A) mm	1.84/ 8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37	1.84 8.5 98 7>	
ng)	A % A dB(A) mm	8.0/ 99/ 5 <1 Hi:39 Me:38 Lo:37	8.5 98 7>	
	% A dB(A) mm	99/ 5 <1 Hi:39 Me:38 Lo:37	98 7>	
ax. running current>	A dB(A) mm	5 <1 Hi:39 Me:38 Lo:37	7>	
ax. running current>	dB(A) mm	Hi:39 Me:38 Lo:37		
	mm		48	
		210 × 1070 × 690		
			750 × 968 × 340	
	кд	30	60	
		-	2YC45DXD × 1	
		_	Direct line start	
		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
		_	Electronic expansion valve	
		R41		
	kg	-	2.95 [Pre-charged up to the piping length of 3	
	l	-	0.65 (FVC50K)	
		Microcomputer controlled de-icer		
		Centrifugal fan × 2	Propeller fan $\times 1$	
	W	25 × 1	86 × 1	
		Direct li	ne start	
	СММ	Hi:11 Me:9 Lo:7	Cooling:60 Heating:50	
		Not possible	_	
		Pocket plastic net $\times 2$ (washable)	-	
		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	W	_	20 (Crank case heater)	
		Wireless remote control switch (Optional: RCN-E1R)	– (Indoor unit side)	
			- Internal thermostat for fan motor.	
		Frost protection thermostat.	Anomalous discharge temperature protection	
Liquid line	mm (in)	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Gas line	(11)		15.88(5/8")×1.0 O/U 15.88(5/8")	
Drain hose Insulation for piping			Holes size $\phi 20 \times 3 \text{ pcs}$	
		Mounting Kit		
		ias line (in)	Wired remote control switch (Optional: RC-E3) Thermostat by electronics Internal thermostat for fan motor. Frost protection thermostat. iquid line Internal thermostat	

, (1)	The data are inclusived at the following conditions.									
	Item	Indoor air t	emperature	Outdoor air	Standards					
	Operation	DB	WB	DB	WB	Standards				
	Cooling	27°C	19°C	35°C	24°C	ISO-T1				
	Heating	20	°C	7°C	6°C	150-11				

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics value are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-WA1" × 1 (option). :Pipe of O/U~Branch, :Pipe of Branch~I/U

Model FDEN100VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

		VNPV (Indoor	Model		, FDEN100)VNPV	
Item				FDEN50V	FDC100VN		
Nominal cooling capacity ⁽¹⁾ kW			kW	10.0 [4.0~11.2]			
Nomina	al heating capacity ⁽¹)	kW		11.2 [4.0	~12.5]	
Power	source			1 Ph	hase, 220-240V	50Hz/220V 60Hz	
	Cooling power consu	mption	kW		2.78		
	Running current (Coo	oling)	А	12.2/12.8			
ta ⁽³⁾	Power factor (Cooling	g)	%	99/99			
Operation data ⁽³⁾	Heating power consu	mption	kW	2.94/2.94			
atio	Running current (Hea	ating)	А	12.9/13.5			
Dper	Power factor (Heating	g)	%		99/99		
Ŭ	Inrush current (L.R.A) <	Max. running current>	А		5 <24>		
	Noise level		dB(A)	Hi:39 Me:38 Lo:37		49	
	r dimensions × Width × Depth		mm	210 × 1070 × 690		845 × 970 × 370	
Net we	•		kg	30		74	
Refrigerant equipment Compressor type & Q'ty			-		RMT5126MDE2 × 1		
Starting	Starting method			_		Direct line start	
Heat exchanger			Louver fin & inner grooved	l tubing	Straight fin & inner grooved tubing		
Refrigerant control			-		Electronic expansion valve		
Refrige	rant				R410	A	
Quantii	Quantity kg		kg	-		3.8 [Pre-charged up to the piping length of 30m]	
Refrige	rant oil		l			0.9 (M-MA68)	
Defrost	control			N	Microcomputer co	ontrolled de-icer	
Air han Fan type	dling equipment & Q'ty			Centrifugal fan × 2		Propeller fan × 1	
Motor			W	25 × 1		86 × 1	
Starting	method			Direct line start		Direct line start	
Air flov	I		СММ	Hi:11 Me:9 Lo:7		Cooling: 75, Heating: 73	
Outside	e air intake			Not possible		_	
Air filte	r, Q'ty			Pocket plastic net $\times 2$ (was	shable)	_	
Shock &	vibration absorber			Rubber sleeve (for fan me	otor)	Rubber sleeve (for compressor)	
Electric	heater		W			20 (Crank case heater)	
	on control			Wireless remote control switch (Option Wired remote control switch (Option		– (Indoor unit side)	
Room te	mperature control			Thermostat by electroni	ics	_	
Safety	equipment			Internal thermostat for fan Frost protection thermos		Internal thermostat for fan motor. Anomalous discharge temperature protection.	
	tion data	Liquid line	mm	I/U 6.35(1/4") 9	9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refrige	rant piping size	Gas line	(in)	I/U 12.7(1/2") 12	2.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
	ting method				Flare p	1 0	
Drain h				Connectable with VP20 (I.D.20mm		Holes size $\phi 20 \times 3$ pcs	
	n for piping			Ne	ecessary (both Lic	. ,	
Accesso					Mounting kit.	Drain hose	
Optional parts							

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [\sim] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-WA1" × 1 (option). :Pipe of O/U~Branch, :Pipe of Branch~I/U

Model FDEN100VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model		FDEN10	VSPV		
Item				FDEN50V FDC100VS				
Nominal cooling capacity ⁽¹⁾ kW				10.0 [4.0~11.2]				
Nomina	al heating capacity ⁽¹)	kW	11.2 [4.0~12.5]				
Power	source			3 Pha	ase, 380-415V	50Hz/380V 60Hz		
	Cooling power consu	mption	kW	2.78/2.78				
	Running current (Coo	oling)	А	4.1/4.3				
ta ⁽³⁾	Power factor (Cooling	g)	%		98/9	8		
n da	Heating power consu	mption	kW		2.94/2			
Operation data ⁽³⁾	Running current (Hea	nting)	А		4.3/4	.5		
	Power factor (Heating	g)	%		99/9	9		
•	Inrush current (L.R.A) <	Max. running current>	А		5 <1	5>		
	Noise level		dB(A)	Hi:39 Me:38 Lo:37		49		
	r dimensions × Width × Depth		mm	210 × 1070 × 690		845 × 970 × 370		
Net we	-		kg	30		74		
-	erant equipment essor type & Q'ty			_		RMT5126MDE3 × 1		
Starting	method			-		Direct line start		
Heat exchanger				Louver fin & inner grooved tubing		Straight fin & inner grooved tubing		
Refriger	ant control			_		Electronic expansion valve		
Refrige	erant				R410	A		
Quanti	ty		kg	– 3.8 [Pre-charged up to the p		3.8 [Pre-charged up to the piping length of 30m]		
Refrige	rant oil		l	-		0.9 (M-MA68)		
Defrost	control			Microcomputer controlled de-icer		ntrolled de-icer		
	dling equipment & Q'ty			Centrifugal fan × 2		Propeller fan × 1		
Motor			W	25 × 1		86 × 1		
Starting	method			Direct line start		Direct line start		
Air flov	<i>i</i>		СММ	Hi:11 Me:9 Lo:7		Cooling: 75, Heating: 73		
Outside	e air intake			Not possible		_		
Air filte	r, Q'ty			Pocket plastic net \times 2 (wash	able)	-		
Shock &	vibration absorber			Rubber sleeve (for fan mot	tor)	Rubber sleeve (for compressor)		
Electric	heater		W	-		20 (Crank case heater)		
	ion control on switch			Wireless remote control switch (Option Wired remote control switch (Option		– (Indoor unit side)		
Room te	mperature control			Thermostat by electronic	cs	_		
Safety equipment				Internal thermostat for fan m Frost protection thermosta		Internal thermostat for fan motor. Anomalous discharge temperature protection.		
	tion data	Liquid line	mm	I/U 6.35(1/4") 9.	.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")		
Refrigerant piping size Gas line		(in)	I/U 12.7(1/2") 12	.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")			
Connecting method				Flare p				
Drain hose			Connectable with VP20 (I.D.20mm,		Holes size $\phi 20 \times 3$ pcs			
Insulation for piping			Nec	cessary (both Lic	uid & Gas lines)			
Accesso	ries			Mounting kit. Drain hose				
0	l parts							

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [\sim] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-WA1" x 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDEN125VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDEN12	5VNPV		
Item				FDEN60V	FDC125VN		
Nominal cooling capacity ⁽¹⁾ kW				12.5 [5.0	0~14.0]		
Nomi	nal heating capacity(1)		kW	14.0 [4.0~16.0]			
Powe	r source			1 Phase, 220-240V 50Hz/220V 60Hz			
Cooling power consumption			kW	4.23/4.23			
	Running current (Cooling)		А	18.5/19.4			
Operation data ⁽³⁾	Power factor (Cooling)		%	99/	99		
ip uc	Heating power consumpt	ion	kW	3.83/	3.83		
eratio	Running current (Heating	ç)	А	16.8/	17.6		
Ope	Power factor (Heating)		%	99/	99		
	Inrush current (L.R.A) <ma< td=""><td>ax. running current></td><td>А</td><td>5 <2</td><td>24></td></ma<>	ax. running current>	А	5 <2	24>		
	Noise level		dB(A)	Hi:41 Me:39 Lo:38	Cooling: 50, Heating: 51		
	ior dimensions It × Width × Depth		mm	210 × 1320 × 690	845 × 970 × 370		
Net w	· · · · · · · · · · · · · · · · · · ·		kg	36	74		
	rigerant equipment mpressor type & Q'ty			-	RMT5126MDE2 × 1		
Startin	g method			_	Direct line start		
Heat	eat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control			_	Electronic expansion valve		
Refrig	gerant			R41	0A		
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]		
Refrig	gerant oil		l	-	0.9 (M-MA68)		
Defros	st control			Microcomputer c	ontrolled de-icer		
	andling equipment pe & Q'ty			Centrifugal fan × 4	Propeller fan × 1		
Motor			W	20 × 2	86 × 1		
Startin	g method			Direct line start	Direct line start		
Air flo	ow.		СММ	Hi:18 Me:14 Lo:12	Cooling:75, Heating:73		
Outsi	de air intake			Not possible	_		
Air fil	ter, Q'ty			Pocket plastic net × 2 (washable)	_		
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	c heater		W	-	20 (Crank case heater)		
	ation control		_	Wireless remote control switch (Optional : RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)		
Room	temperature control			Thermostat by electronics	_		
Safety equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.			
Installation data Refrigerant piping size Connecting method		Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")		
		(in)	I/U 12.7(1/2") 15.88(5/8")×1.0	15.88(5/8")×1.0 O/U 15.88(5/8")			
			Flare p	biping			
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insulat	tion for piping			Necessary (both Liquid & Gas lines)			
Access	sories			Mounting kit	. Drain hose		
Optional parts				-			

Notes (1) The data are measured at the following conditions.

	0				
Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°С	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\ \ \sim \ \]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDEN125VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDEN12	5VSPV	
Item				FDEN60V	FDC125VS	
Nominal cooling capacity ⁽¹⁾ kW				12.5 [5.0	0~14.0]	
Nomi	nal heating capacity ⁽¹⁾		kW	14.0 [4.0	D~16.0]	
Powe	r source			3 Phase, 380-415\	/ 50Hz/380V 60Hz	
Cooling power consumption			kW	4.23/	4.23	
	Running current (Cooling)		А	6.2/	6.5	
Ita ⁽³⁾	Power factor (Cooling)		%	98/	99	
n da	Heating power consumpt	ion	kW	3.83/	3.83	
Operation data ⁽³⁾	Running current (Heating	g)	А	5.6/	5.9	
Ope	Power factor (Heating)		%	99/	99	
•	Inrush current (L.R.A) <ma< td=""><td>ax. running current></td><td>А</td><td>5 <1</td><td>5></td></ma<>	ax. running current>	А	5 <1	5>	
	Noise level		dB(A)	Hi:41 Me:39 Lo:38	Cooling: 50, Heating: 51	
	ior dimensions nt × Width × Depth		mm	210 × 1320 × 690	845 × 970 × 370	
Net w	•		kg	36	74	
	gerant equipment pressor type & Q'ty	ant equipment		-	RMT5126MDE3 × 1	
	g method			_	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			-	Electronic expansion valve	
Refrig	gerant			R41	0A	
Quan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m]	
Refrig	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control			Microcomputer c	ontrolled de-icer	
	andling equipment pe & Q'ty			Centrifugal fan × 4	Propeller fan $\times 1$	
Motor			W	20 × 2	86 × 1	
Startin	ig method			Direct line start	Direct line start	
Air flo	w		СММ	Hi:18 Me:14 Lo:12	Cooling:75, Heating:73	
Outsi	de air intake			Not possible	_	
Air fil	ter, Q'ty			Pocket plastic net × 2 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	ic heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wireless remote control switch (Optional : RCN-E1R) Wired remote control switch (Optional: RC-E3)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics	_	
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	lation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refrig	Refrigerant piping size Gas line		(in)	I/U 12.7(1/2") 15.88(5/8")×1.0	15.88(5/8")×1.0 O/U 15.88(5/8")	
Connecting method			Flare	biping		
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
Insulat	tion for piping			Necessary (both Li	quid & Gas lines)	
Access	sories			Mounting kit	. Drain hose	
Optior	Optional parts			-		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Ctau dan da
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20		7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\ \ \sim \ \]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDEN140VNPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDEN1	40VNPV		
Item				FDEN71V	FDC140VN		
Nomi	nal cooling capacity ⁽¹⁾		kW	14.0 [5	.0~14.5]		
Nomi	nal heating capacity(1)		kW	16.0 [4.0~16.5]			
Powe	r source			1 Phase, 220-240	V 50Hz/220V 60Hz		
	Cooling power consump	tion	kW	4.8	//4.87		
	Running current (Cooling)		А	21.6/22.6			
Operation data ⁽³⁾	Power factor (Cooling)		%	98	3/98		
b nd	Heating power consumpt	ion	kW	4.59	0/4.59		
eratio	Running current (Heating	g)	А	20.	//21.0		
Ope	Power factor (Heating)		%	99	9/99		
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 -</td><td><24></td></m<>	ax. running current>	А	5 -	<24>		
	Noise level		dB(A)	Hi:41 Me:39 Lo:38	51		
	ior dimensions nt × Width × Depth		mm	210 × 1320 × 690	845 × 970 × 370		
	reight		kg	36	74		
	gerant equipment pressor type & Q'ty			_	RMT5126MDE2 × 1		
Startin	ng method			-	Direct line start		
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control			-	Electronic expansion valve		
Refrig	gerant			R4	10A		
Quan	tity		kg	_	3.8 [Pre-charged up to the piping length of 30m]		
Refri	gerant oil		l	-	0.9 (M-MA68)		
Defros	st control			Microcomputer	controlled de-icer		
	andling equipment pe & Q'ty			Centrifugal fan × 4	Propeller fan × 1		
Motor			W	20 × 2	86 × 1		
Startin	ig method			Direct line start	Direct line start		
Air flo			СММ	Hi:18 Me:14 Lo:12	Cooling:75, Heating:73		
Outsi	de air intake			Not possible			
Air fil	ter, Q'ty			Pocket plastic net \times 2 (washable)	-		
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	ic heater		W	_	20 (Crank case heater)		
	ation control tion switch			Wireless remote control switch (Optional : RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)		
-	temperature control			Thermostat by electronics	_		
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Instal	llation data	Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")		
Refri	Refrigerant piping size Gas line		(in)	I/U 15.88(5/8") 15.88(5/8")×1.	0 15.88(5/8")×1.0 O/U 15.88(5/8")		
Connecting method			Flare	piping			
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insula	tion for piping			Necessary (both	Liquid & Gas lines)		
Acces	sories			Mounting k	it. Drain hose		
Optional parts					_		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Cton doudo
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [$~\sim~~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDEN140VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

		- (Model	FDEN	140VSPV	
Item				FDEN71V	FDC140VS	
Nominal cooling capacity ⁽¹⁾ kW				14.0	5.0~14.5]	
Nomi	nal heating capacity ⁽¹⁾		kW	16.0	4.0~16.5]	
Powe	r source			3 Phase, 380-41	5V 50Hz/380V 60Hz	
Cooling power consumption			kW	4.4	37/4.87	
	Running current (Cooling)		А	7.2/7.6		
Operation data ⁽³⁾	Power factor (Cooling)		%		98/98	
on da	Heating power consumption		kW	4.9	59/4.59	
ratio	Running current (Heating	g)	А	6	.7/7.1	
Ope	Power factor (Heating)		%		99/98	
	Inrush current (L.R.A) <ma< td=""><td>ax. running current></td><td>А</td><td>5</td><td><15></td></ma<>	ax. running current>	А	5	<15>	
	Noise level		dB(A)	Hi:41 Me:39 Lo:38	51	
	ior dimensions It × Width × Depth		mm	210 × 1320 × 690	845 × 970 × 370	
Net w	-		kg	36	74	
	gerant equipment pressor type & Q'ty			_	RMT5126MDE3 × 1	
Startin	g method			_	Direct line start	
Heat	eat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			-	Electronic expansion valve	
Refrig	gerant			F	410A	
Quan	tity		kg		3.8 [Pre-charged up to the piping length of 30m]	
Refriç	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control			Microcompute	r controlled de-icer	
	andling equipment pe & Q'ty			Centrifugal fan × 4	Propeller fan × 1	
Motor			W	20 × 2	86 × 1	
Startin	g method			Direct line start	Direct line start	
Air flo	ow.		СММ	Hi:18 Me:14 Lo:12	Cooling:75, Heating:73	
Outsi	de air intake			Not possible	-	
Air fil	ter, Q'ty			Pocket plastic net $\times 2$ (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	c heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wireless remote control switch (Optional : RCN-E1F Wired remote control switch (Optional: RC-E3)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics	-	
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	lation data	Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0	.8 9.52(3/8")×0.8 O/U 9.52(3/8")	
Refrigerant piping size Gas line		Gas line	(in)	I/U 15.88(5/8") 15.88(5/8")×1	.0 15.88(5/8")×1.0 O/U 15.88(5/8")	
Connecting method			Flar	e piping		
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm) Holes size $\phi 20 \times 3$ pcs	
Insulat	tion for piping			Necessary (both	Liquid & Gas lines)	
Access	sories			Mounting	kit. Drain hose	
Optior	Optional parts				_	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	150 71
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDEN200VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDEN	1200VSPV		
Item				FDEN100V	FDC200VS		
Nominal cooling capacity ⁽¹⁾ kW			kW	20.0 [7.0~22.4]			
Nomi	nal heating capacity ⁽¹⁾		kW	22.4 [7.6~25.0]			
Powe	r source			3 Phase, 380-4	15V 50Hz/380V 60Hz		
	Cooling power consump	tion	kW	6.	47/6.47		
	Running current (Cooling)		А	9	7/10.1		
ata ⁽³⁾	Power factor (Cooling)		%		96/97		
on da	Heating power consumpt	tion	kW	5.	97/5.97		
Operation data ⁽³⁾	Running current (Heating	g)	А	9	.1/9.5		
Ope	Power factor (Heating)		%		95/95		
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5</td><td><19></td></m<>	ax. running current>	А	5	<19>		
	Noise level		dB(A)	Hi:44 Me:41 Lo:39	57		
	ior dimensions nt × Width × Depth		mm	250 × 1620 × 690	1300 × 970 × 370		
-	eight		kg	46	122		
	frigerant equipment ompressor type & Q'ty			_	GTC5150ND70K × 1		
Startin	arting method			_	Direct line start		
Heat	eat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control			-	Electronic expansion valve		
Refrig	gerant			F	3410A		
Quan	tity		kg	_	5.4 [Pre-charged up to the piping length of 30m]		
Refri	gerant oil		l	-	1.45 (M-MA32R)		
Defros	st control			Microcompute	er controlled de-icer		
	andling equipment pe & Q'ty			Centrifugal fan × 4	Propeller fan $\times 2$		
Motor			W	30 × 2	86 × 2		
Startin	g method			Direct line start	Direct line start		
Air flo	DW .		СММ	Hi:26 Me:23 Lo:21	Cooling: 150, Heating: 145		
Outsi	de air intake			Not possible	-		
Air fil	ter, Q'ty			Pocket plastic net \times 2 (washable)	-		
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	c heater		W	-	33 (Crank case heater)		
	ation control tion switch			Wireless remote control switch (Optional: RCN-E1F Wired remote control switch (Optional: RC-E3)			
Room	temperature control			Thermostat by electronics	-		
Safet	Safety equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Instal	Installation data Refrigerant piping size Gas line ⁽⁷⁾		mm	I/U 9.52(3/8") 9.52(3/8")×	9.52(3/8")×0.8 O/U 9.52(3/8")		
Refri			(in)	I/U 15.88(5/8") 15.88(5/8")×	1.0 22.22(7/8")×1.6 O/U 22.22(7/8")		
Connecting method			Flare piping (Outdo	oor gas piping: Brazing)			
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mn	h) Holes size $\phi 20 \times 3 \text{ pcs}$		
Insula	tion for piping			Necessary (both Liquid & Gas lines)			
Acces	sories			Mounting kit. Drain hose, Reducer kit (Ple	ase see 1.5.3), Accessory pipe (Please see 1.5.3)		
Optional parts					_		

onai parts

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	150 71
Heating	20		7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(8) Branching pipe set "DIS-WB1" × 1 (option). :Pipe of O/U~Branch, :Pipe of Branch~I/U

Model FDEN250VSPV (Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDEN2	50VSPV		
Item				FDEN125V FDC250VS			
Nominal cooling capacity ⁽¹⁾ kW			kW	25.0 [10.0~28.0]			
Nomi	nal heating capacity ⁽¹⁾		kW	28.0 [9.5~31.5]			
Powe	r source			3 Phase, 380-415	V 50Hz/380V 60Hz		
	Cooling power consumption		kW	9.01/9.01			
	Running current (Cooling)		А	13.5	5/14.1		
ata ⁽³⁾	Power factor (Cooling)		%	96	5/97		
b nd	Heating power consumpt	tion	kW	8.05	5/8.05		
Operation data ⁽³⁾	Running current (Heating	g)	А	12.2	/12.8		
Ope	Power factor (Heating)		%	95	i/96		
	Inrush current (L.R.A) <m< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>22></td></m<>	ax. running current>	А	5 <	22>		
	Noise level		dB(A)	Hi:46 Me:44 Lo:43	Cooling:57, Heating:58		
	ior dimensions nt × Width × Depth		mm	250 × 1620 × 690	1505 × 970 × 370		
	eight		kg	46	140		
	gerant equipment pressor type & Q'ty			_	GTC5150ND70K × 1		
Startin	g method			_	Direct line start		
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control			-	Electronic expansion valve		
Refrig	gerant			R4	10A		
Quan	tity		kg	-	7.2 [Pre-charged up to the piping length of 30m]		
Refri	gerant oil		l	-	1.45 (M-MA32R)		
Defros	st control			Microcomputer	controlled de-icer		
	andling equipment pe & Q'ty			Centrifugal fan × 4	Propeller fan × 2		
Motor	-		W	40 × 2	86 × 2		
Startin	g method			Direct line start	Direct line start		
Air flo	DW .		СММ	Hi:29 Me:26 Lo:23	Cooling: 150, Heating: 145		
Outsi	de air intake			Not possible	_		
Air fil	ter, Q'ty			Pocket plastic net $\times 2$ (washable)	-		
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	ic heater		W	-	33 (Crank case heater)		
	ation control tion switch			Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)		
Room	temperature control			Thermostat by electronics			
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Instal	lation data	Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8	12.7(1/2")×0.8 O/U 12.7(1/2")		
Refri	Refrigerant piping size Gas line ⁽⁷⁾		(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	22.22(7/8") ×1.6 O/U 22.22(7/8")		
Connecting method			Flare piping (Outdoo	r gas piping: Brazing)			
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$		
Insula	tion for piping			Necessary (both I	Liquid & Gas lines)		
Acces	sories			Mounting kit. Drain hose, Reducer kit (Pleas	e see 1.5.3), Accessory pipe (Please see 1.5.3)		
Option	nal parts				_		

onai parts

Notes (1) The data are measured at the following conditions.

	U				
Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	150 71
Heating	20	°С	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [\sim] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(8) Branching pipe set "DIS-WB1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(c) Triple type

Model FDEN140VNTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model	FDEN14	IOVNTV			
Item				FDEN50V	FDC140VN			
Nominal cooling capacity ⁽¹⁾		kW	14.0 [5.	0~14.5]				
Nomi	nal heating capacity(1)		kW	16.0 [4.0~16.5]				
Powe	r source			1 Phase, 220-240	/ 50Hz/220V 60Hz			
	Cooling power consumption	on	kW	4.88/4.88				
	Running current (Cooling)		А	21.7/22.6				
ta ⁽³⁾	Power factor (Cooling)		%	98/	/98			
Operation data ⁽³⁾	Heating power consumption	n	kW	4.58/	4.58			
atio	Running current (Heating)		А	20.2/	21.1			
ber	Power factor (Heating)		%	99/99				
0	Inrush current (L.R.A) <max< td=""><td>. running current></td><td>А</td><td>5 <</td><td>24></td></max<>	. running current>	А	5 <	24>			
	Noise level		dB(A)	Hi:39 Me:38 Lo:37	51			
	ior dimensions		mm	210 × 1070 × 690	845 × 970 × 370			
-	it × Width × Depth eight			30	74			
	gerant equipment		kg					
	pressor type & Q'ty			-	RMT5126MDE2 × 1			
Startin	g method			-	Direct line start			
leat e	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrig	erant control			_	Electronic expansion valve			
Refrig	gerant			R41	A			
Quan	tity		kg	_	3.8 [Pre-charged up to the piping length of 30m			
Refrig	gerant oil		l	– 0.9 (M-MA68)				
Defros	st control			Microcomputer controlled de-icer				
	andling equipment pe & Q'ty			Centrifugal fan × 2	Propeller fan × 1			
Motor			W	25 × 1	86 × 1			
Startin	g method			Direct line start	Direct line start			
Air flo	w		СММ	Hi:11 Me:9 Lo:7	Cooling: 75, Heating: 73			
Outsi	de air intake			Not possible	_			
Air fil	ter, Q'ty			Pocket plastic net × 2 (washable)	_			
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electri	c heater		W	-	20 (Crank case heater)			
	ation control			Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	- (Indoor unit side)			
Room	temperature control			Thermostat by electronics	_			
Safety	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
Installation data		mm	I/U 6.35(1/4") 9.52(3/8")×0.	<u> </u>				
		Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8				
Connecting method			Flare	piping				
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs			
Insulat	tion for piping			Necessary (both L	iquid & Gas lines)			
Access	sories			Mounting ki	t. Drain hose			
Ontion	al parts							

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standarda	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating 20°C			7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-TA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDEN140VSTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model	FDEN14	IOVSTV	
Item			model	FDEN50V	FDC140VS	
Nomi	nal cooling capacity ⁽¹⁾		kW	14.0 [5.	0~14.5]	
Nomi	nal heating capacity ⁽¹⁾		kW	16.0 [4.0~16.5]		
Powe	r source			3 Phase, 380-415	/ 50Hz/380V 60Hz	
	Cooling power consumpt	tion	kW	4.88/4.88		
	Running current (Cooling)		А	7.2/7.6		
Ita ⁽³⁾	Power factor (Cooling)		%	98/	98	
n da	Heating power consumption		kW	4.58/	4.58	
Operation data ⁽³⁾	Running current (Heating	g)	А	6.7/	7.0	
Ope	Power factor (Heating)		%	99/	99	
•	Inrush current (L.R.A) <ma< td=""><td>ax. running current></td><td>А</td><td>5 <</td><td>15></td></ma<>	ax. running current>	А	5 <	15>	
	Noise level		dB(A)	Hi:39 Me:38 Lo:37	51	
	ior dimensions It × Width × Depth		mm	210 × 1070 × 690	845 × 970 × 370	
Net w	•		kg	30	74	
	Refrigerant equipment Compressor type & Q'ty			-	RMT5126MDE3 × 1	
Startin	g method			_	Direct line start	
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrig	erant control			_	Electronic expansion valve	
Refrig	gerant			R41	A0	
Quan	tity		kg	_	3.8 [Pre-charged up to the piping length of 30m]	
Refrig	gerant oil		l	-	0.9 (M-MA68)	
Defros	st control			Microcomputer c	ontrolled de-icer	
	andling equipment pe & Q'ty			Centrifugal fan × 2	Propeller fan × 1	
Motor			W	25 × 1	86 × 1	
Startin	g method			Direct line start	Direct line start	
Air flo	ow.		СММ	Hi:11 Me:9 Lo:7	Cooling: 75, Heating: 73	
Outsi	de air intake			Not possible	_	
Air fil	ter, Q'ty			Pocket plastic net × 2 (washable)	-	
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electri	c heater		W	-	20 (Crank case heater)	
	ation control tion switch			Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	- (Indoor unit side)	
Room	temperature control			Thermostat by electronics	_	
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Instal	lation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")	
Refrigerant piping size Gas line		Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")	
Connecting method				Flare	biping	
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
Insulat	tion for piping			Necessary (both L	quid & Gas lines)	
Access	sories			Mounting kit	. Drain hose	
Optior	al parts				_	

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	Cooling 27°C		35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Branching pipe set "DIS-TA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(c) Triple type

Model FDEN200VSTV (Indoor unit: 3 units, Outdoor unit: 1 unit)

		N	Model	FDEN	200VSTV			
Item				FDEN71V	FDC200VS			
Nominal cooling capacity ⁽¹⁾			W	20.0 [7.0~22.4]				
Nomi	nal heating capacity ⁽¹⁾	k	W	22.4 [7.6~25.0]			
Powe	r source			3 Phase, 380-41	5V 50Hz/380V 60Hz			
	Cooling power consumption	k	W	6.40/6.40				
	Running current (Cooling)		А	9.6/10.0				
ata ⁽³⁾	Power factor (Cooling)		%	96/97				
Operation data ⁽³⁾	Heating power consumption	k	W	5.90/5.90				
ratic	Running current (Heating)		А	9.0/9.4				
Ope	Power factor (Heating)		%	95/95				
	Inrush current (L.R.A) <max. r<="" td=""><td>unning current></td><td>А</td><td>5</td><td><19></td></max.>	unning current>	А	5	<19>			
	Noise level	dB	B(A)	Hi:41 Me:39 Lo:38	57			
	ior dimensions It × Width × Depth	m	nm	210 × 1320 × 690	1300 × 970 × 370			
	eight		kg	36	122			
	Refrigerant equipment Compressor type & Q'ty			-	GTC5150ND70K × 1			
Startir	g method			-	Direct line start			
Heat	exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrig	erant control			_	Electronic expansion valve			
Refri	gerant			R	410A			
Quan	tity		kg	_	5.4 [Pre-charged up to the piping length of 30m]			
Refri	gerant oil		l	_	1.45 (M-MA32R)			
Defros	st control			Microcomputer controlled de-icer				
	andling equipment pe & Q'ty			Centrifugal fan × 4	Propeller fan ×2			
Motor			W	20 × 2	86 × 2			
Startir	g method			Direct line start	Direct line start			
Air flo	ow.	CI	MM	Hi:18 Me:14 Lo:12	Cooling: 150, Heating: 145			
Outsi	de air intake			Not possible	_			
Air fil	ter, Q'ty			Pocket plastic net \times 2 (washable)	_			
	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	c heater	,	W	-	33 (Crank case heater)			
	ation control tion switch			Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optional: RC-E3)	– (Indoor unit side)			
Room	temperature control			Thermostat by electronics	-			
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.			
Installation data Refrigerant piping size Gas line ⁽⁷⁾		quid line m	nm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")			
		(1)	in)	I/U 15.88(5/8") 15.88(5/8")×1.	0 22.22(7/8")×1.6 O/U 22.22(7/8")			
Connecting method				Flare piping (Outdo	or gas piping: Brazing)			
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $20 \times 3 \text{ pcs}$			
Insula	tion for piping			Necessary (both	Liquid & Gas lines)			
Acces	sories			Mounting kit. Drain hose, Reducer kit, (Plea	se see 1.5.3), Accessory pipe (Please see 1.5.3)			
Option	nal parts				-			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	180 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

(7) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(8) Branching pipe set "DIS-TB1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(4) Duct connected-Middle static pressure type (FDUM)

(a) single type

Model FDUM50ZHXV

		Model	FDUM5	0ZHXV			
Item		moder	FDUM50V	SRC50ZHX-S			
Nomi	inal cooling capacity ⁽¹⁾	kW	5.0 [2.	2~5.6]			
Nomi	inal heating capacity ⁽¹⁾	kW	5.4 [2.5~6.3]				
Powe	er source		1 Phase, 220-240V, 50Hz/220V, 60Hz				
	Cooling power consumption	kW	1.52/1.52				
	Running current (Cooling)	А	6.7/7.1				
ita ⁽³⁾	Power factor (Cooling)	%	98/98				
Operation data ⁽³⁾	Heating power consumption	kW	1.41/1.41				
atio	Running current (Heating)	А	6.3/6.5				
Dper	Power factor (Heating)	%	98/98				
Ŭ	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	14>			
	Noise level	dB(A)	Hi:34 Me:31 Lo:28	47			
Exter	rior dimensions	mm	299 × 750 × 635	640 × 800 × 290			
-	ht × Width × Depth						
	veight	kg	34	43			
	gerant equipment pressor type & Q'ty		-	5CS130XG04 × 1			
Startir	ng method		-	Direct line start			
leat	exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing			
Refrig	gerant control		-	Electronic expansion valve			
Refri	gerant		R41	A			
Quan	ntity	kg	_	1.4 [Pre-charged up to the piping length of 15m]			
Refri	gerant oil	l	-	0.48 (RB68A)			
	st control		Microcomputer controlled de-icer				
	andling equipment /pe & Q'ty		Centrifugal fan × 2	Propeller fan ×1			
Aotor		W	60 × 1	45 × 1			
Startir	ng method		Direct line start	Direct line start			
Air fl	ow (Standard)	СММ	Hi:14 Me:12 Lo:11	40			
Avail	able static pressure	Pa	Standard: 50/40, Max: 85/90	_			
Outsi	ide air intake		Possible	_			
Air fil	lter, Q'ty		Installed on site	_			
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electr	ic heater	W	-	-			
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)			
Room	temperature control		Thermostat by electronics	_			
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
	llation data gerant piping size	mm (in)	Liquid line: ¢6.35 (1/4″)				
Refrigerant piping size Connecting method		("")	Flare	oiping			
			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 5$ pcs			
Drain hose							
Insula	Insulation for piping		Necessary (both Liquid & Gas lines) Drain hose				
	sories		Drain	hose			

Notes (1) The data are measured at the following conditions.

· · /		8				
	Item	Indoor air t	emperature	Outdoor air	Standards	
	Operation	DB	WB	DB	WB	Standards
	Cooling 27°C		19°C	35°C	24°C	ISO-T1
	Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDUM60ZHXV

		Model	EDUM	60ZHXV			
Item		Widdei	FDUM60V	SRC60ZHX-S			
Nomi	nal cooling capacity ⁽¹⁾	kW	5.6 [2.	8~6.3]			
	nal heating capacity ⁽¹⁾	kW	6.7 [3.1~7.1]				
Powe	r source		1 Phase, 220-240V, 50Hz/220V, 60Hz				
Cooling power consumption		kW	1.86/1.86				
	Running current (Cooling)	А	8.2	8.2/8.5			
ta ⁽³⁾	Power factor (Cooling)	%	99/99				
Operation data ⁽³⁾	Heating power consumption	kW	1.96/1.96				
atio	Running current (Heating)	А	9.0/9.4				
ber	Power factor (Heating)	%	95/95				
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	14>			
	Noise level	dB(A)	Hi:34 Me:31 Lo:28	48			
Exter	ior dimensions		200 x 050 x 625	640 × 200 × 200			
-	$\mathbf{t} \times \mathbf{Width} \times \mathbf{Depth}$	mm	299 × 950 × 635	640 × 800 × 290			
	reight	kg	40	43			
	gerant equipment pressor type & Q'ty		-	5CS130XG04 × 1			
Startin	g method		-	Direct line start			
leat	exchanger		Louver fin & inner grooved tubing	M shape fin & inner grooved tubing			
lefrig	erant control		-	Electronic expansion valve			
Refrig	gerant		R4	10A			
Juan	tity	kg	_	1.4 [Pre-charged up to the piping length of 15m			
Refriq	gerant oil	l	-	0.48 (RB68A)			
Defros	st control		Microcomputer controlled de-icer				
	andling equipment pe & Q'ty		Centrifugal fan × 2	Propeller fan ×1			
lotor		W	100 × 1	45 × 1			
tartin	g method		Direct line start	Direct line start			
\ir flo	ow (Standard)	СММ	Hi:18 Me:16 Lo:14	40			
vaila	able static pressure	Pa	Standard: 50/40, Max: 85/100	_			
Dutsi	de air intake		Possible	-			
Air fil	ter, Q'ty		Procure locally	-			
hock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	c heater	W	_	_			
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)			
Room	temperature control		Thermostat by electronics	-			
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
	lation data gerant piping size	mm (in)	Liquid line: 6.35 (1/4″)				
	ecting method	. ,	Flare	piping			
	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 5$ pcs			
nsulat	tion for piping		Necessary (both L	iquid & Gas lines)			
Access				n hose			
Intior	nal parts		Filter kit (UM-FL2E)			

Notes (1) The data are measured at the following conditions.

(1) 1	The data are measured at the following conditions.										
	Item	Indoor air t	emperature	Outdoor air	Standards						
(Operation	DB	WB	DB	WB	Standards					
	Cooling	27°C	19°C	35°C	24°C	ISO-T1					
	Heating	20°C		7°C	6°C	150-11					

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDUM71VNV

		Model	EDUM	71VNV		
Item		Woder	FDUM71V	FDCV71VN		
Nomi	inal cooling capacity ⁽¹⁾	kW	7.1 [3.	2~8.0]		
Nomi	inal heating capacity ⁽¹⁾	kW	8.0 [3.6~9.0]			
Powe	er source		1 Phase, 220-240	/, 50Hz/220V, 60Hz		
	Cooling power consumption	kW	2.08	/2.08		
	Running current (Cooling)	А	9.2/9.6			
ıta ⁽³⁾	Power factor (Cooling)	%	98/98			
Operation data ⁽³⁾	Heating power consumption	kW	2.21/2.21			
ratio	Running current (Heating)	А	10.2	/10.7		
Dpei	Power factor (Heating)	%	94	/94		
Ũ	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	17>		
	Noise level	dB(A)	Hi:35 Me:32 Lo:29	48		
Exter	rior dimensions	mm	299 × 950 × 635	750 × 968 × 340		
-	ht × Width × Depth		233 × 330 × 033	730 × 900 × 940		
	veight	kg	40	60		
	gerant equipment pressor type & Q'ty		_	2YC45DXD × 1		
Startir	ng method		-	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	gerant control		_	Electronic expansion valve		
Refri	gerant		R4 ⁻	10A		
Quan	ntity	kg	-	2.95 [Pre-charged up to the piping length of 30m		
	gerant oil	l	-	0.65 (FVC50K)		
	st control		Microcomputer of	controlled de-icer		
	andling equipment /pe & Q'ty		Centrifugal fan × 2	Propeller fan ×1		
Motor	ſ	W	100 × 1	86 × 1		
Startir	ng method		Direct line start	Direct line start		
Air fl	ow (Standard)	СММ	Hi:20 Me:18 Lo:15	Cooling type:60, Heating type:50		
Avail	able static pressure	Pa	Standard: 50/40, Max: 85/100	-		
Outsic	de air intake		Possible	-		
Air fil	lter, Q'ty		Procure locally	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
	ic heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics	-		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
	llation data gerant piping size	mm (in)	Liquid line: _{\$} 9.52 (3/8")	Gas line:		
	necting method		Flare piping			
	n hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insula	tion for piping		Necessary (both L	iquid & Gas lines)		
Acces	sories		Drair	n hose		
	nal parts		E:14 1-14 (UM-FL2E)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Stendende		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	100 51	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDUM100VNV

		Model	FDUMV	100VNV	
Item		model	FDUM100V	FDC100VN	
Nomi	inal cooling capacity ⁽¹⁾	kW	10.0 [4.	0~11.2]	
Nomi	inal heating capacity ⁽¹⁾	kW	11.2 [4.	0~12.5]	
owe	er source		1 Phase, 220-240	V 50Hz/220V 60Hz	
	Cooling power consumption	kW	2.80	/2.80	
	Running current (Cooling)	А	12.5/13.1		
Ita ⁽³⁾	Power factor (Cooling)	%	97/	/97	
Operation data ⁽³⁾	Heating power consumption	kW	2.77/2.80		
atio	Running current (Heating)	А	12.4	/13.0	
ber	Power factor (Heating)	%	97/	/98	
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>	
	Noise level	dB(A)	Hi:37 Me:35 Lo:32	49	
xter	rior dimensions				
	ht × Width × Depth	mm	350 × 1370 × 635	845 × 970 × 370	
let v	veight	kg	59	74	
	gerant equipment pressor type & Q'ty		-	RMT5126MDE2 × 1	
tartii	ng method		-	Direct line start	
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
	gerant control		_	Electronic expansion valve	
efri	gerant		R41	10A	
	ntity	kg	-	3.8 [Pre-charged up to the piping length of 30m	
	gerant oil	l	_	0.9 (M-MA68)	
	ost control		Microcomputer of	controlled de-icer	
	andling equipment ype & Q'ty		Centrifugal fan × 3	Propeller fan ×1	
lotoi	r	W	50 × 1, 100 × 1	86 × 1	
tartiı	ng method		Direct line start	Direct line start	
ir fl	ow (Standard)	СММ	Hi: 28 Me: 25 Lo: 22	Cooling type: 75, Heating type: 73	
vail	able static pressure	Pa	Standard: 60/60, Max: 90/100	_	
	de air intake		Possible	_	
	lter, Q'ty		Procure locally	-	
	x & vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	ric heater	W	-	20 (Crank case heater)	
	ration control ation switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)	
loom	a temperature control		Thermostat by electronics	_	
afet	ty equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)	Liquid line: φ9.52 (3/8″)	Gas line: φ15.88 (5/8″)	
Connecting method			Flare	piping	
Drain	n hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
nsula	ation for piping		Necessary (both L	iquid & Gas lines)	
Acces	ssories		Drain	hose	
	nal parts		Filter kit (UM-FL3E)	

Notes (1) The data are measured at the following conditions.

(1) The data are fileasured at	the following conditions.				
Item	Indoor air t	emperature	Outdoor air	Stondordo	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDUM100VSV

		Model	FDUM1	00VSV	
Item			FDUM100V	FDC100VS	
Nomi	nal cooling capacity ⁽¹⁾	kW	10.0 [4.	0~11.2]	
lomi	nal heating capacity ⁽¹⁾	kW	11.2 [4.	0~12.5]	
owe	r source		3 Phase, 380-415	/ 50Hz/380V 60Hz	
	Cooling power consumption	kW	2.80/	/2.80	
	Running current (Cooling)	А	4.2/4.4		
ata ⁽³⁾	Power factor (Cooling)	%	96/97		
n dâ	Heating power consumption	kW	2.77/	2.80	
Operation data ⁽³⁾	Running current (Heating)	А	4.1/	/4.3	
ber	Power factor (Heating)	%	98/	/99	
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>	
	Noise level	dB(A)	Hi:37 Me:35 Lo:32	49	
xter	ior dimensions		050 - 1070 - 605	045 070 070	
leigh	$ht \times Width \times Depth$	mm	350 × 1370 × 635	845 × 970 × 370	
	<i>r</i> eight	kg	59	74	
	gerant equipment pressor type & Q'ty		-	RMT5126MDE3 × 1	
tartin	ng method		-	Direct line start	
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
efrig	erant control		-	Electronic expansion valve	
lefriq	gerant		R41	A	
Juan	tity	kg	-	3.8 [Pre-charged up to the piping length of 30n	
Refri	gerant oil	l	-	0.9 (M-MA68)	
	st control		Microcomputer controlled de-icer		
	andling equipment pe & Q'ty		Centrifugal fan × 3	Propeller fan ×1	
Aotor		W	50 × 1, 100 × 1	86 × 1	
tartin	ng method		Direct line start	Direct line start	
\ir flo	ow (Standard)	СММ	Hi: 28 Me: 25 Lo: 22	Cooling type: 75, Heating type: 73	
vaila	able static pressure	Pa	Standard: 60/60, Max: 90/100	-	
Outsid	le air intake		Possible		
Air fil	lter, Q'ty		Procure locally	_	
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	ic heater	W	-	20 (Crank case heater)	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)	
Room	temperature control		Thermostat by electronics	-	
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)	Liquid line:	Gas line: 015.88 (5/8″)	
	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
nsula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Drain	hose	
<u>.</u>	nal parts		Filter kit (UM-FL3E)	

Notes (1) The data are measured at the following conditions.

Item	Indoor air temperature		Outdoor air	Stendende		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	100 71	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

Model FDUM125VNV

		Model	FDUM1	25VNV	
Item			FDUM125V	FDC125VN	
Nominal cooling capacity ⁽¹⁾		kW	12.5 [5.0~14.0]		
lomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.	0~16.0]	
owe	r source		1 Phase, 220-240	/ 50Hz/220V 60Hz	
	Cooling power consumption	kW	4.03/4.03		
	Running current (Cooling)	А	18.3/19.1		
Ita ⁽³⁾	Power factor (Cooling)	%	96/96		
Operation data ⁽³⁾	Heating power consumption	kW	3.80/3.85		
ratic	Running current (Heating)	А	17.0/	/18.1	
Dpe	Power factor (Heating)	%	97/	/97	
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>	
	Noise level	dB(A)	Hi:38 Me:36 Lo:33	Cooling: 50, Heating: 51	
	ior dimensions nt × Width × Depth	mm	350 × 1370 × 635	845 × 970 × 370	
-	reight	kg	59	74	
Refri	gerant equipment pressor type & Q'ty	5	-	RMT5126MDE2 × 1	
	ng method		_	Direct line start	
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
efrig	erant control		_	Electronic expansion valve	
lefri	gerant		R41	10A	
luan	tity	kg		3.8 [Pre-charged up to the piping length of 30m	
efri	gerant oil	l	-	0.9 (M-MA68)	
	st control		Microcomputer controlled de-icer		
	andling equipment pe & Q'ty		Centrifugal fan × 3	Propeller fan ×1	
/lotor		W	50 × 1, 100 × 1	86 × 1	
tartir	ng method		Direct line start	Direct line start	
ir fl	ow (Standard)	СММ	Hi: 34 Me: 31 Lo: 27	Cooling: 75, Heating: 73	
vail	able static pressure	Pa	Standard: 60/55, Max 85/100		
Outsic	le air intake		Possible		
	lter, Q'ty		Procure locally		
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	ic heater	W	-	20 (Crank case heater)	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)	
Room	temperature control		Thermostat by electronics	_	
afet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectior	
	llation data gerant piping size	mm (in)	Liquid line:	Gas line: 015.88 (5/8″)	
	ecting method		Flare	piping	
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs	
nsula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Drain	hose	
Dotion	nal parts		Filter kit (UM-FL3E)	

Notes (1) The data are measured at the following conditions.

Item	Indoor air temperature		Outdoor air	Stendende		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	100 71	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDUM125VSV

		Model	FDUM1	25VSV		
Item			FDUM125V	FDC125VS		
Nomi	nal cooling capacity ⁽¹⁾	kW	12.5 [5.0~14.0]			
Nomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.	0~16.0]		
owe	r source		3 Phase, 380-415	/ 50Hz/380V 60Hz		
	Cooling power consumption	kW	4.03/	/4.03		
	Running current (Cooling)	А	6.1/6.4			
Ita ⁽³⁾	Power factor (Cooling)	%	95/96			
n da	Heating power consumption	kW	3.80/3.85			
Operation data ⁽³⁾	Running current (Heating)	А	5.7/	/6.0		
Ibei	Power factor (Heating)	%	96/	96/97		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>		
	Noise level	dB(A)	Hi:38 Me:36 Lo:33	Cooling: 50, Heating: 51		
Exter	ior dimensions	mm	350 × 1370 × 635	845 × 970 × 370		
-	nt × Width × Depth					
	reight	kg	59	74		
	gerant equipment pressor type & Q'ty		-	RMT5126MDE3 × 1		
Startir	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control		_	Electronic expansion valve		
Refri	gerant		R41	10A		
Quan	tity	kg	_	3.8 [Pre-charged up to the piping length of 30n		
	gerant oil	l	_	0.9 (M-MA68)		
	st control		Microcomputer controlled de-icer			
	andling equipment pe & Q'ty		Centrifugal fan × 3	Propeller fan ×1		
Motor		W	50 × 1, 100 × 1	86 × 1		
Startir	ng method		Direct line start	Direct line start		
Air flo	ow (Standard)	СММ	Hi: 34 Me: 31 Lo: 27	Cooling: 75, Heating: 73		
Availa	able static pressure	Pa	Standard: 60/55, Max 85/100	-		
Outsic	le air intake		Possible			
Air fil	ter, Q'ty		Procure locally			
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
	ic heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)		
Room	temperature control		Thermostat by electronics	_		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protectio		
	llation data gerant piping size	mm (in)	Liquid line: φ9.52 (3/8″) Gas line: φ15.88 (5/8″)			
	ecting method	. /	Flare	piping		
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$		
Insula	tion for piping		Necessary (both L	iquid & Gas lines)		
Acces	sories		Drain	hose		
Ontio	nal parts		Filter kit (UM-FL3E)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor ai	Stendende		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	100 71	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

Model FDUM140VNV

		Model	FDUM1	40VNV		
Item			FDUM140V	FDC140VN		
Nominal cooling capacity ⁽¹⁾		kW	14.0 [5.	0~14.5]		
lomi	nal heating capacity ⁽¹⁾	kW	16.0 [4.	0~16.5]		
owe	r source		1 Phase, 220-240	/ 50Hz/220V 60Hz		
	Cooling power consumption	kW	4.95	4.95		
	Running current (Cooling)	А	22.3/23.3			
ata ⁽³⁾	Power factor (Cooling)	%	97/97			
Operation data ⁽³⁾	Heating power consumption	kW	4.89/4.91			
ratio	Running current (Heating)	А	22.3	22.5		
Dpei	Power factor (Heating)	%	95/	95/99		
Ŭ	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	24>		
	Noise level	dB(A)	Hi:38 Me:36 Lo:33	51		
Exteri	ior dimensions	mm	350 × 1370 × 635	845 × 970 × 370		
-	t × Width × Depth					
	eight	kg	59	74		
	gerant equipment pressor type & Q'ty		_	RMT5126MDE2 × 1		
Startin	g method		_	Direct line start		
leat e	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrige	erant control		-	Electronic expansion valve		
Refrig	gerant		R41	A		
Quant	tity	kg	_	3.8 [Pre-charged up to the piping length of 30n		
Refrig	gerant oil	l	-	0.9 (M-MA68)		
Defros	at control		Microcomputer controlled de-icer			
	andling equipment pe & Q'ty		Centrifugal fan × 3	Propeller fan ×1		
Aotor		W	50 × 1, 100 × 1	86 × 1		
Startin	g method		Direct line start	Direct line start		
Air flo	ow (Standard)	СММ	Hi: 34 Me: 31 Lo: 27	Cooling: 75, Heating: 73		
Availa	able static pressure	Pa	Standard: 60/55, Max 85/100	_		
Dutsid	e air intake		Possible	-		
Air fil	ter, Q'ty		Procure locally			
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	c heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)		
Room	temperature control		Thermostat by electronics			
Safety	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	lation data gerant piping size	mm (in)	Liquid line: 			
-	ecting method	. ,	Flare	piping		
	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$		
[nsulat	tion for piping		Necessary (both L	iquid & Gas lines)		
Access	sories		Drain			
Ontion	nal parts		Filter kit (UM-FL3E)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air temperature		Outdoor air	Stendende		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	100 71	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

Model FDUM140VSV

		Model	FDUM1	40VSV		
Item			FDUM140V	FDC140VS		
Nomi	nal cooling capacity ⁽¹⁾	kW	14.0 [5.	0~14.5]		
Nomi	nal heating capacity ⁽¹⁾	kW	16.0 [4.0~16.5]			
owe	r source		3 Phase, 380-415	/ 50Hz/380V 60Hz		
Cooling power consumption		kW	4.95	4.95		
	Running current (Cooling)	А	7.4/7.7			
Power factor (Cooling)		%	97/	/98		
Operation data ⁽³⁾	Heating power consumption	kW	4.89	/4.91		
atio	Running current (Heating)	А	7.4/	7.6		
Dei	Power factor (Heating)	%	95/	/98		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	15>		
	Noise level	dB(A)	Hi:38 Me:36 Lo:33	51		
Exter	ior dimensions		250 - 1270 - 525	Q4E 070 070		
	nt × Width × Depth	mm	350 × 1370 × 635	845 × 970 × 370		
	reight	kg	59	74		
	gerant equipment pressor type & Q'ty		-	RMT5126MDE3 × 1		
startin	g method		-	Direct line start		
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
	erant control		-	Electronic expansion valve		
Refrig	gerant		R41			
Quan	-	kg	-	3.8 [Pre-charged up to the piping length of 30n		
	gerant oil	l	_	0.9 (M-MA68)		
	st control		Microcomputer controlled de-icer			
	andling equipment pe & Q'ty		Centrifugal fan × 3	Propeller fan ×1		
Motor		W	50 × 1, 100 × 1	86 × 1		
Startin	g method		Direct line start	Direct line start		
Air flo	ow (Standard)	СММ	Hi: 34 Me: 31 Lo: 27	Cooling: 75, Heating: 73		
Availa	able static pressure	Pa	Standard: 60/55, Max 85/100			
Dutsid	e air intake		Possible	_		
	ter, Q'ty		Procure locally	_		
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
	c heater	W	-	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)		
Room	temperature control		Thermostat by electronics			
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
		mm (in)	Liquid line:	Gas line: \$15.88 (5/8″)		
Conn	ecting method		Flare	piping		
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insulat	tion for piping		Necessary (both L	iquid & Gas lines)		
Access	sories		Drain	hose		
Optior	nal parts		Filter kit (UM-FL3E)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Standards	
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	160 T1	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(b)Twin type

Model FDUM100VNPV(Indoor unit: 2 units, Outdoor unit: 1 units)

Mode						FDUM10	0VNPV	
Item				FDUM50V FDC100VN				
Nomin	al cooling capacity ⁽¹⁾		kW			10.0 [4.0	~11.2]	
Nomin	al heating capacity ⁽¹⁾		kW			11.2 [4.0	~12.5]	
Power	source				1	Phase, 220-240V	50Hz/220V 60Hz	
	Cooling power consumption	on	kW			3.12/3	3.12	
	Running current (Cooling)		А	13.6/14.3				
ta ⁽³⁾	Power factor (Cooling)		%			99/9	99	
n da	Heating power consumption	n	kW			3.27/3	3.27	
atio	Running current (Heating)		А			14.3/	5.0	
Operation data ⁽³⁾	Power factor (Heating)		%			99/9	99	
0	Inrush current (L.R.A) <max.< td=""><td>running current></td><td>А</td><td></td><td></td><td>5 <2</td><td>4></td><td></td></max.<>	running current>	А			5 <2	4>	
	Noise level	d	B(A)	I	Hi:34 Me:31 Lo	:28	4	9
Exterio	or dimensions					25	04E ··· 0	20 270
-	× Width × Depth		mm		299 × 750 × 6	55	845 × 97	
let we			kg		34		7	4
	erant equipment essor type & Q'ty				-		RMT5126	MDE2 × 1
Starting method				_		Direct 1	ine start	
Heat exchanger				Louver f	in & inner groo	ved tubing	Straight fin & inner grooved tubing	
efriger	ant control				-		Electronic ex	pansion valve
Refrige	erant					R41	A	
Juanti	ty		kg		-		3.8 [Pre-charged up to t	ne piping length of 30n
Refrige	erant oil		l		-		0.9 (M·	MA68)
	control			Microcomputer controlled de-icer				
	ndling equipment e & Q'ty			Centrifugal fan × 2		Propelle	r fan × 1	
/lotor			W	60 × 1		86 × 1		
tarting	method			Direct line start		Direct line start		
ir flov	v (Standard)		СММ	Hi: 14 Me: 12 Lo: 11		o: 11	Cooling type: 75	Heating type: 73
vailat	ole static pressure		Pa	Standa	ard: 50/40, M	ax 85/90	-	-
Outside	air intake				Possible		-	-
Air filte					Procure locally	/	-	-
	vibration absorber			Rubbe	er sleeve (for fai	n motor)	Rubber sleeve (
Electric			W				20 (Crank o	case heater)
	ion control on switch				ontrol switch (C it (Optional : R	Optional : RC-E3)	– (Indoor	unit side)
	emperature control				rmostat by elect		-	-
	equipment			Internal	thermostat for	fan motor.	Internal thermos Anomalous discharge	
nstalla	tion data Li	quid line	mm	Frost protection thermostat.		9.52(3/8")×0.8	9.52(3/8")×0.8 O/	
			(in)	I/U	12.7(1/2")	12.7(1/2")×0.8	15.88(5/8")×1.0 O	′U 15.88(5/8")
Connecting method					Flare p	iping		
Drain h	lose			Connectable wit	h VP20 (I.D. 20	0mm, O.D. 26mm)	Holes size	\$20 × 3 pcs
nsulatio	on for piping					Necessary (both Li	quid & Gas lines)	
Accesso	ries					Drain	hose	
Optional parts				Filter kit (UM-FL1E)				

Item	Indoor air t	emperature	Outdoor air	temperature	Standards
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [\sim] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM100VSPV(Indoor unit: 2 units, Outdoor unit: 1 unit)

		Mode	units, Outdoor unit: 1 unit)	FDUM100VSPV			
Item			FDUM50V	FDC100VS			
Nomina	al cooling capacity ⁽¹⁾	kW		10.0 [4.0~11.2]			
Nomina	al heating capacity ⁽¹⁾	kW		11.2 [4.0~12.5]			
Power	source		3 Phas	e, 380-415V 50Hz/380V 60Hz			
	Cooling power consumption	kW		3.12/3.12			
	Running current (Cooling)	А	4.6/4.8				
e . e,		%		98/99			
Operation data ⁽³⁾				3.27/3.27			
ion	Heating power consumption	kW					
erat	Running current (Heating)	A		4.8/5.0			
đ	Power factor (Heating)	%		98/99			
	Inrush current (L.R.A) <max. run<="" td=""><td>nning current> A</td><td></td><td>5 <15></td></max.>	nning current> A		5 <15>			
	Noise level	dB(A)	Hi:34 Me:31 Lo:28	49			
	r dimensions	mm	299 × 750 × 635	845 × 970 × 370			
-	× Width × Depth						
Net we	· · · · · · · · · · · · · · · · · · ·	kg	34	74			
-	rant equipment RMT5126MDE		RMT5126MDE3 × 1				
Starting	Starting method		-	Direct line start			
Heat exchanger			Louver fin & inner grooved tub	bing Straight fin & inner grooved tubing			
Refriger	ant control		-	Electronic expansion valve			
Refrige	erant			R410A			
Quanti	ty	kg	-	3.8 [Pre-charged up to the piping length of 30m			
Refrige	erant oil	l	-	0.9 (M-MA68)			
Defrost	control		Mic	rocomputer controlled de-icer			
Air han Fan type	i dling equipment e & Q'ty		Centrifugal fan × 2	Propeller fan × 1			
Motor		W	60 × 1	86 × 1			
Starting	method		Direct line start	Direct line start			
Air flov	v (Standard)	CMM	Hi: 14 Me: 12 Lo: 11	Cooling type: 75, Heating type: 73			
Availab	le static pressure	Pa	Standard: 50/40, Max 85/	90 –			
Outside	air intake		Possible	-			
Air filte	r, Q'ty		Procure locally	-			
Shock &	vibration absorber		Rubber sleeve (for fan motor	r) Rubber sleeve (for compressor)			
Electric	heater	W	_	20 (Crank case heater)			
	ion control on switch		Wired remote control switch (Optiona Wireless kit (Optional : RCN-KI				
Room te	emperature control		Thermostat by electronics	_			
Safety equipment			Internal thermostat for fan mo Frost protection thermostat.				
Installation data Liquid line		id line mm	-	2(3/8")×0.8 9.52(3/8")×0.8 O/U 9.52(3/8")			
Refrigerant piping size Gas line		(*)	I/U 12.7(1/2") 12.7(1/2")×0.8 15.88(5/8")×1.0 O/U 15.88(5/8")			
Connecting method				Flare piping			
Drain h	ose		Connectable with VP20 (I.D. 20mm, C	D.D. 26mm) Holes size $\phi 20 \times 3$ pcs			
Insulatio	on for piping		Nece	ssary (both Liquid & Gas lines)			
Accesso	ries			Drain hose			
Optiona	l parts			Filter kit (UM-FL1E)			

Notes (1) The data are measured at the following conditions.

· · ·		0				
	Item	Indoor air t	emperature	Outdoor air	temperature	Standards
	Operation	DB	WB	DB	WB	Standards
	Cooling	27°C	19°C	35°C	24°C	ISO-T1
	Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\ \ \sim \ \]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM125VNPV(Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDUM12	5VNPV			
Item				FDUM60V	FDC125VN			
Nomi	nal cooling capacity ⁽¹)	kW	12.5 [5.	~14.0]			
Nomi	nal heating capacity ⁽¹)	kW	14.0 [4.	0~16.0]			
Powe	er source			1 Phase, 220-240	/ 50Hz/220V 60Hz			
	Cooling power consum	ption	kW	4.47/	4.47			
	Running current (Cooli	ng)	А	19.7/20.6				
ta ⁽³⁾	Power factor (Cooling)		%	99/	99			
Operation data ⁽³⁾	Heating power consum	ption	kW	4.51/	4.51			
Running current (Heating)		ng)	А	19.8/	20.7			
ber	Power factor (Heating)		%	99/	99			
0	Inrush current (L.R.A) <	Max. running current>	А	5 <2	24>			
	Noise level		dB(A)	Hi:34 Me:31 Lo:28	Cooling: 50, Heating: 51			
	ior dimensions		mm	299 × 950 × 635	845 × 970 × 370			
-	nt × Width × Depth							
	veight gerant equipment		kg	40	74			
	oressor type & Q'ty			_	RMT5126MDE2 × 1			
Starting method			_	Direct line start				
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrigerant control				-	Electronic expansion valve			
Refri	gerant			R41	0A			
Juan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m			
Refri	gerant oil		l	-	0.9 (M-MA68)			
Defro	st control			Microcomputer controlled de-icer				
	andling equipment pe & Q'ty			Centrifugal fan × 2	Propeller fan $\times 1$			
Motor			W	100 × 1	86 × 1			
Startir	ng method			Direct line start	Direct line start			
	ow (Standard)		СММ	Hi:18 Me:16 Lo:14	Cooling:75, Heating:73			
Avail	able static pressure		Pa	Standard:50/40, Max 85/100	_			
Outsi	de air intake			Possible	_			
	lter, Q'ty			Procure locally	-			
	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	ic heater		W	-	20 (Crank case heater)			
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)			
Room	temperature control			Thermostat by electronics	-			
Safety equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection				
Installation data Refrigerant piping size Gas line		mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")				
		(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")				
Connecting method			Flare p	biping				
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$			
nsula	tion for piping			Necessary (both Li	quid & Gas lines)			
	sories			Drain				
Option	nal parts			Filter kit (U	JM-FL2E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20°C		7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM125VSPV(Indoor unit: 2 units, Outdoor unit: 1 unit)

		-	Model	FDUM12	25VSPV			
Item			model	FDUM60V	FDC125VS			
Nominal cooling capacity ⁽¹⁾			kW	12.5 [5.	0~14.0]			
Nom	inal heating capacity	1)	kW	14.0 [4.	D~16.0]			
Powe	er source			3 Phase, 380-415	/ 50Hz/380V 60Hz			
	Cooling power consum	ption	kW	4.47/	4.47			
	Running current (Cooli	ng)	А	6.6/6.9				
Power factor (Cooling)		%	98/	98				
Operation data ⁽³⁾	Heating power consum	ption	kW	4.51/	4.51			
atio	Running current (Heati	ng)	А	6.6/	6.9			
ber	Power factor (Heating)		%	99/	99			
0	Inrush current (L.R.A) <	Max. running current>	А	5 <	5>			
	Noise level		dB(A)	Hi:34 Me:31 Lo:28	Cooling: 50, Heating: 51			
	ior dimensions		mm	299 × 950 × 635	845 × 970 × 370			
	ht × Width × Depth			40	74			
	veight gerant equipment		kg	40				
	pressor type & Q'ty			_	RMT5126MDE3 × 1			
	tarting method			-	Direct line start			
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrigerant control			_	Electronic expansion valve				
Refri	gerant			R41				
Quar			kg	-	3.8 [Pre-charged up to the piping length of 30m]			
	gerant oil		l	-	0.9 (M-MA68)			
	st control			Microcomputer controlled de-icer				
	andling equipment pe & Q'ty			Centrifugal fan × 2	Propeller fan × 1			
Moto	ſ		W	100 × 1	86 × 1			
Starti	ng method			Direct line start	Direct line start			
	ow (Standard)		СММ	Hi:18 Me:16 Lo:14	Cooling:75, Heating:73			
Avail	able static pressure		Pa	Standard:50/40, Max 85/100	_			
Dutsi	de air intake			Possible	_			
	lter, Q'ty			Procure locally	-			
	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	ic heater		W	-	20 (Crank case heater)			
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)			
Room	temperature control			Thermostat by electronics	_			
Safety equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection				
Installation data Liquid line Refrigerant piping size Gas line		Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8				
		(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")				
Connecting method			Flare	biping				
Drair	n hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$			
nsula	tion for piping			Necessary (both L	quid & Gas lines)			
Acces	sories			Drain	hose			
Ontio	ptional parts			Filter kit (UM-FL2E)				

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	Heating 20°		7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM140VNPV(Indoor unit: 2 units, Outdoor unit: 1 unit)

		•	Model	FDUM	140VNPV			
Item			moder	FDUM71V	FDC140VN			
Nomi	nal cooling capacity ⁽¹⁾		kW	14.0 [5.0~14.5]			
Nomi	nal heating capacity ⁽¹⁾		kW	16.0 [4.0~16.5]				
Powe	r source			1 Phase, 220-24	0V 50Hz/220V 60Hz			
	Cooling power consump	otion	kW	5.0	0/5.00			
	Running current (Coolir	ıg)	А	22.0/23.0				
ta ⁽³⁾	Power factor (Cooling)		%	9	9/99			
Operation data ⁽³⁾	Heating power consump	tion	kW	4.9	4/4.80			
atior	Running current (Heatin	(g)	А	22.	4/22.1			
pera	Power factor (Heating)	<i>6</i> ′	%	9	6/99			
0	Inrush current (L.R.A) <n< td=""><td>Iax. running current></td><td>А</td><td>5</td><td><24></td></n<>	Iax. running current>	А	5	<24>			
	Noise level	8	dB(A)	Hi:35 Me:32 Lo:29	51			
Exter	ior dimensions							
	nt × Width × Depth		mm	299 × 950 × 635	845 × 970 × 370			
	reight		kg	40	74			
	gerant equipment pressor type & Q'ty			– RMT5126MDE2 × 1				
Startir	tarting method			_	Direct line start			
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrig	erant control				Electronic expansion valve			
Refri	gerant			R	410A			
Quan	tity		kg		3.8 [Pre-charged up to the piping length of 30m]			
Refri	gerant oil		l		0.9 (M-MA68)			
Defro	st control			Microcomputer controlled de-icer				
	andling equipment pe & Q'ty			Centrifugal fan × 2	Propeller fan × 1			
Motor			W	100 × 1	86 × 1			
Startir	ng method			Direct line start	Direct line start			
Air fl	ow (Standard)		СММ	Hi:20 Me:18 Lo:15	Cooling:75, Heating:73			
Avail	able static pressure		Pa	Standard:50/40, Max 85/100	-			
Dutsi	de air intake			Possible	_			
Air fil	lter, Q'ty			Procure locally	-			
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electr	ic heater		W		20 (Crank case heater)			
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)			
Room	temperature control			Thermostat by electronics	-			
Safety equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection				
Installation data		Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.				
Refrigerant piping size Gas line		(in)	I/U 15.88(5/8") 15.88(5/8")×1	0 15.88(5/8")×1.0 O/U 15.88(5/8")				
Connecting method			Flare	piping				
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$			
Insula	tion for piping			Necessary (both	Liquid & Gas lines)			
Acces	sories			Dra	in hose			
Option	nal parts			Filter kit	(UM-FL2E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Standarda
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	150 T1
Heating 20		°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [$~\sim~~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM140VSPV(Indoor unit: 2 units, Outdoor unit: 1 unit)

		VSPV(Indoor	Model	FDUM14	10VSPV			
Item				FDUM71V FDC140VS				
Nom	inal cooling capacity ⁽¹)	kW	14.0 [5.	0~14.5]			
Nom	inal heating capacity ⁽¹)	kW	16.0 [4.	0~16.5]			
Powe	er source			3 Phase, 380-415	/ 50Hz/380V 60Hz			
	Cooling power consum	ption	kW	5.00/5.00				
	Running current (Cooli	ng)	А	7.3/7.7				
ta ⁽³⁾	Power factor (Cooling)		%	99/	99			
Operation data ⁽³⁾	Heating power consum	ption	kW	4.94/	4.80			
atio	Running current (Heating	ng)	А	7.4/	7.4			
ber	Power factor (Heating)		%	96/	99			
0	Inrush current (L.R.A) <n< td=""><td>Max. running current></td><td>А</td><td>5 <</td><td>15></td></n<>	Max. running current>	А	5 <	15>			
	Noise level		dB(A)	Hi:35 Me:32 Lo:29	51			
Exte	rior dimensions		mm	299 × 950 × 635	845 × 970 × 370			
-	ht × Width × Depth		mm					
	veight gerant equipment		kg	40	74			
	gerant equipment pressor type & Q'ty			_	RMT5126MDE3 × 1			
Starting method			-	Direct line start				
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrigerant control			_	Electronic expansion valve				
Refri	gerant			R41				
Quar	ntity		kg	_	3.8 [Pre-charged up to the piping length of 30m]			
	gerant oil		l		0.9 (M-MA68)			
	st control			Microcomputer c	ontrolled de-icer			
	andling equipment /pe & Q'ty			Centrifugal fan × 2	Propeller fan × 1			
Motor	r		W	100 × 1	86 × 1			
Starti	ng method			Direct line start	Direct line start			
	ow (Standard)		СММ	Hi:20 Me:18 Lo:15	Cooling:75, Heating:73			
Avail	able static pressure		Pa	Standard:50/40, Max 85/100	_			
Dutsi	ide air intake			Possible	-			
	lter, Q'ty			Procure locally	-			
-	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	ric heater		W	_	20 (Crank case heater)			
	ation control ation switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)			
Room	temperature control			Thermostat by electronics	-			
Safet	ty equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection.			
Installation data Liquid line Refrigerant piping size Gas line		Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")			
		(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	15.88(5/8")×1.0 O/U 15.88(5/8")				
Conr	necting method			Flare	piping			
Drair	n hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs			
[nsula	tion for piping			Necessary (both L	iquid & Gas lines)			
Acces	ssories			Drain	hose			
Optional parts				Filter kit (JM-FL2E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Branching pipe set "DIS-WA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM200VSPV(Indoor unit: 2 units, Outdoor unit: 1 unit)

			Model	FDUM20	OVSPV			
Item				FDUM100V FDC200VS				
Nomi	nal cooling capacity	1)	kW	20.0 [7.0	0~22.4]			
Nomi	nal heating capacity	1)	kW	22.4 [7.6	6~25.0]			
Powe	r source			3 Phase, 380–415\	/ 50Hz/380V 60Hz			
	Cooling power consum	ption	kW	6.86/6.86				
	Running current (Cooli	ing)	А	9.9/10.5				
ta ⁽³⁾	Power factor (Cooling)	1	%	99/	99			
Operation data ⁽³⁾	Heating power consum	ption	kW	6.72/	6.72			
ratio	Running current (Heati	ng)	А	9.8/1	0.3			
Iado	Power factor (Heating)		%	99/5	99			
•	Inrush current (L.R.A) <	Max. running current>	А	5 <1	9>			
	Noise level		dB(A)	Hi:37 Me:35 Lo:32	57			
	ior dimensions nt × Width × Depth		mm	350 × 1370 × 635	1300 × 970 × 370			
-	reight		kg	59	122			
	gerant equipment pressor type & Q'ty			-	GTC5150ND70K × 1			
Startir	starting method			_	Direct line start			
leat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrig	erant control			-	Electronic expansion valve			
Refri	gerant			R41	0A			
Quantity		kg	_	5.4 [Pre-charged up to the piping length of 30m				
	gerant oil		l	_	1.45 (M-MA32R)			
	st control			Microcomputer co	ontrolled de-icer			
	andling equipment pe & Q'ty			Centrifugal fan × 3	Propeller fan × 2			
Motor			W	50 × 1 , 100 × 1	86 × 2			
	ng method			Direct line start	Direct line start			
	ow (Standard)		СММ	Hi:28 Me:25 Lo:22	Cooling:150, Heating:145			
	able static pressure		Pa	Standard:60/60, Max:90/100	-			
	le air intake			Possible	-			
	ter, Q'ty			Procure locally				
-	& vibration absorber		W	Rubber sleeve (for fan motor)	Rubber sleeve (for compressor) 33 (Crank case heater)			
	ation control		vv	- Wired remote control switch (Optional : RC-E3)	55 (Claik case heater)			
	tion switch			Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)			
Room	temperature control			Thermostat by electronics	_			
Safety equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection				
Installation data Refrigerant piping size Gas line ⁽⁶⁾		Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")			
		(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	22.22(7/8")×1.6 O/U 22.22(7/8")				
	ecting method			Flare piping(Outdoor	gas piping: Brazing)			
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $20 \times 3 \text{ pcs}$			
	tion for piping			Necessary (both Li	1 ,			
	sories			Drain hose, Reducer kit, (Please see 1.5				
Option	nal parts			Filter kit (U	M-FL3E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	150 71	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-WB1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM250VSPV(Indoor unit: 2 units, Outdoor unit: 1 unit)

		`	Model	FDUM25	OVSPV			
Item			model	FDUM125V FDC250VS				
Nom	inal cooling capacity ⁽¹)	kW	25.0 [10.0~28.0]				
Nom	inal heating capacity ⁽¹)	kW	28.0 [9.5	5~31.5]			
Powe	er source			3 Phase, 380–415	/ 50Hz/380V 60Hz			
	Cooling power consum	ption	kW	9.31/9.31				
	Running current (Cooli	ng)	А	13.6/14.3				
Ita ⁽³⁾	Power factor (Cooling)		%	99/	99			
Operation data ⁽³⁾	Heating power consumption	ption	kW	8.35/	8.35			
ratic	Running current (Heating	ng)	А	12.3/	12.9			
Ope	Power factor (Heating)		%	98/	98			
	Inrush current (L.R.A) <	Max. running current>	А	5 <2	2>			
	Noise level		dB(A)	Hi:38 Me:36 Lo:33	Cooling:57, Heating:58			
	rior dimensions ht × Width × Depth		mm	350 × 1370 × 635	1505 × 970 × 370			
Net v	veight		kg	59	140			
	gerant equipment pressor type & Q'ty			-	GTC5150ND70K × 1			
Starting method			_	Direct line start				
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrig	gerant control			_	Electronic expansion valve			
Refri	gerant			R41				
Quar			kg	-	7.2 [Pre-charged up to the piping length of 30m]			
	gerant oil		l		1.45 (M-MA32R)			
	st control			Microcomputer c	ontrolled de-icer			
	andling equipment pe & Q'ty			Centrifugal fan × 3	Propeller fan × 2			
Motor	ſ		W	50 × 1 , 100 × 1	86 × 2			
	ng method			Direct line start	Direct line start			
Air fl			CMM	Hi:34 Me:31 Lo:27	Cooling:150, Heating:145			
	able static pressure		Pa	Standard:60/55, Max:85/100	_			
	ide air intake			Possible	-			
	lter, Q'ty			Procure locally	-			
	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
	ic heater		W	-	33 (Crank case heater)			
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)			
•	temperature control			Thermostat by electronics	_			
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
nsta	llation data	Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8	12.7(1/2")×0.8 O/U 12.7(1/2")			
Refrigerant piping size Gas line ⁽⁶⁾		(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	22.22(7/8")×1.6 O/U 22.22(7/8")				
Conr	ecting method			Flare piping(Outdoor	gas piping: Brazing)			
Drair	n hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$			
nsula	tion for piping			Necessary (both Li	quid & Gas lines)			
	sories			Drain hose, Reducer kit, (Please see 1.5	,, , , , , , , , , , , , , , , , , , ,			
Optio	nal parts			Filter kit (U	M-FL3E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO T1	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where two indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-WB1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(c) Triple type

Model FDUM140VNTV(Indoor unit: 3 units, Outdoor unit: 1 unit)

		`	Model			, FDUM14	40VNTV		
Item			FDUM50V FDC140VN						
Nomi	inal cooling capacity	1)	kW		14.0 [5.0~14.5]				
Nomi	inal heating capacity	1)	kW			16.0 [4.	0~16.5]		
Powe	er source					1 Phase, 220-240	/ 50Hz/220V 60Hz		
	Cooling power consum	ption	kW	5.09/5.09					
Running current (Cooling)		А	22.4/23.4						
ta ⁽³⁾	Power factor (Cooling)		%			99/	/99		
Operation data ⁽³⁾	Heating power consum	ption	kW			5.03/	/4.89		
atio	Running current (Heati	ng)	А			22.8/	/22.5		
ber	Power factor (Heating)		%			96/	/99		
0	Inrush current (L.R.A) <	Max. running current>	А			5 <	24>		
	Noise level		dB(A)	Hi	i:34 Me:31 L	0:28	51		
Exter	ior dimensions								
	$ht \times Width \times Depth$		mm	2	99 × 750 × 0	635	845 × 970 × 370		
	veight		kg		34		74		
	gerant equipment pressor type & Q'ty				-		RMT5126MDE2 × 1		
Starting method				-			Direct line start		
leat	exchanger			Louver fir	n & inner gro	ooved tubing	Straight fin & inner grooved tubing		
	gerant control				-		Electronic expansion valve		
Refri	gerant					R41	A		
Quan	itity		kg		-		3.8 [Pre-charged up to the piping length of 30m]		
	gerant oil		l		-		0.9 (M-MA68)		
	st control					Microcomputer c	controlled de-icer		
	andling equipment pe & Q'ty			Centrifugal fan × 2		n × 2	Propeller fan × 1		
Motor	•		W	60 × 1			86 × 1		
Startir	ng method			Direct line start		art	Direct line start		
Air flo	ow (Standard)		СММ	Hi:14 Me:12 Lo:11		.o:11	Cooling:75, Heating:73		
Availa	able static pressure		Pa	Standa	ard:50/40, M	lax:85/90			
Outsi	ide air intake				Possible		_		
Air fil	lter, Q'ty			1	Procure local	ly	_		
Shock	& vibration absorber			Rubber	sleeve (for f	an motor)	Rubber sleeve (for compressor)		
	ic heater		W		-		20 (Crank case heater)		
	ation control tion switch					(Optional : RC-E3) RCN-KIT3-E)	– (Indoor unit side)		
	temperature control				nostat by ele				
	y equipment			Internal t	hermostat for protection the	r fan motor.	Internal thermostat for fan motor. Anomalous discharge temperature protection.		
Insta	llation data	Liquid line	mm		6.35(1/4")	9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")		
Refrigerant piping size Gas line		(in)	I/U 1	2.7(1/2")	12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")			
Connecting method					Flare	piping			
Drain	hose			Connectable with	VP20 (I.D. 2	20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insula	tion for piping					Necessary (both L	iquid & Gas lines)		
Acces	sories					Drain	hose		
Option	nal parts					Filter kit (U	UM-FL1E)		

Item	Indoor air t	emperature	Outdoor air	Standards		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	150 T1	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 230V 50Hz or 220V 60Hz.

(4) Values in [$~\sim~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(7) Branching pipe set "DIS-TA1" × 1 (option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

Model FDUM140VSTV(Indoor unit: 3 units, Outdoor unit: 1 unit)

		vSIV(Indoor)	Model	FDUM14	40VSTV		
Item			Widder	FDUM50V FDC140VS			
Nomi	nal cooling capacity ⁽¹)	kW	14.0 [5.0~14.5]			
Nomi	nal heating capacity ⁽¹)	kW	16.0 [4.	0~16.5]		
Powe	r source			3 Phase, 380-415	/ 50Hz/380V 60Hz		
	Cooling power consumption	ption	kW	5.09/5.09			
	Running current (Coolin	ng)	А	7.4/	7.8		
ta ⁽³⁾	Power factor (Cooling)		%	99/	/99		
Operation data ⁽³⁾	Heating power consump	ption	kW	5.03/	4.89		
atio	Running current (Heatin	ng)	А	7.6/	7.5		
Dper	Power factor (Heating)		%	96/	/99		
Ŭ	Inrush current (L.R.A) <n< td=""><td>Max. running current></td><td>А</td><td>5 <</td><td>15></td></n<>	Max. running current>	А	5 <	15>		
	Noise level		dB(A)	Hi:34 Me:31 Lo:28	51		
	ior dimensions nt × Width × Depth		mm	299 × 750 × 635	845 × 970 × 370		
	reight		kg	34	74		
Refrigerant equipment Compressor type & Q'ty			_	RMT5126MDE3 × 1			
Starting method			_	Direct line start			
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
Refrigerant control			_	Electronic expansion valve			
Refri	gerant			R41	10A		
ີງuan	tity		kg	-	3.8 [Pre-charged up to the piping length of 30m		
Refri	gerant oil		l	-	0.9 (M-MA68)		
Defros	st control			Microcomputer c	ontrolled de-icer		
	andling equipment pe & Q'ty			Centrifugal fan × 2	Propeller fan × 1		
Motor			W	60 × 1	86 × 1		
	g method			Direct line start	Direct line start		
Air flo	ow (Standard)		СММ	Hi:14 Me:12 Lo:11	Cooling:75, Heating:73		
Availa	able static pressure		Pa	Standard:50/40, Max:85/90			
Outsi	de air intake			Possible	_		
Air fil	ter, Q'ty			Procure locally	_		
	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
	ic heater		W	_	20 (Crank case heater)		
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)		
Room	temperature control			Thermostat by electronics			
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	lation data	Liquid line	mm	I/U 6.35(1/4") 9.52(3/8")×0.8	9.52(3/8")×0.8 O/U 9.52(3/8")		
Refrigerant piping size Gas line		Gas line	(in)	I/U 12.7(1/2") 12.7(1/2")×0.8	15.88(5/8")×1.0 O/U 15.88(5/8")		
Conn	ecting method			Flare	piping		
	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3 \text{ pcs}$		
	tion for piping			Necessary (both L	•		
Acces				Drain			
Option	nal parts			Filter kit (U	JM-FL1E)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in [$~\sim~~$] show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) Branching pipe set "DIS-TA1" \times 1(option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(c) Triple type

Model FDUM200VSTV(Indoor unit: 3 units, Outdoor unit: 1 unit)

			Model	FDUM2	DOVSTV			
Item				FDUM71V FDC200VS				
Nomi	nal cooling capacity(1)		kW	20.0 [7.0~22.4]				
Nomi	nal heating capacity(1)		kW	22.4 [7.	6~25.0]			
Powe	er source			3 Phase, 380–415	/ 50Hz/380V 60Hz			
	Cooling power consump	otion	kW	6.88/6.88				
	Running current (Coolir	ıg)	А	9.9/10.6				
ta ⁽³⁾	Power factor (Cooling)		%	99,	99			
Operation data ⁽³⁾	Heating power consump	tion	kW	6.74	6.74			
atio	Running current (Heatin	g)	А	9.8/	10.3			
bera	Power factor (Heating)		%	99,	99			
0	Inrush current (L.R.A) <m< td=""><td>lax. running current></td><td>А</td><td>5 <</td><td>19></td></m<>	lax. running current>	А	5 <	19>			
	Noise level		dB(A)	Hi:35 Me:32 Lo:29	57			
Exter	ior dimensions			000 050 005	4000 070 070			
-	$ht \times Width \times Depth$		mm	299 × 950 × 635	1300 × 970 × 370			
	veight		kg	40	122			
	gerant equipment pressor type & Q'ty			-	GTC5150ND70K × 1			
Starting method			_	Direct line start				
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing				
Refrig	erant control			-	Electronic expansion valve			
Refri	gerant			R41	A0			
Quan	tity		kg		5.4 [Pre-charged up to the piping length of 30m			
Refri	gerant oil		l	-	1.45 (M-MA32R)			
Defro	st control			Microcomputer of	ontrolled de-icer			
	andling equipment pe & Q'ty			Centrifugal fan × 2	Propeller fan $\times 2$			
Motor	•		W	100 × 1	86 × 2			
Startii	ng method			Direct line start	Direct line start			
Air fl	ow		СММ	Hi:20 Me:18 Lo:15	Cooling:150, Heating:145			
Avail	able static pressure		Pa	Standard:50/40, Max:85/100				
Duts	ide air intake			Possible	_			
Air fi	lter, Q'ty			Procure locally	_			
Shock	& vibration absorber			Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electr	ic heater		W	-	33 (Crank case heater)			
	ation control tion switch			Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)			
	temperature control			Thermostat by electronics	_			
Safet	y equipment			Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
nsta	llation data	Liquid line	mm	I/U 9.52(3/8") 9.52(3/8")×0.8				
Refrigerant piping size Gas line ⁽⁶⁾		(in)	I/U 15.88(5/8") 15.88(5/8")×1.0	22.22(7/8")×1.6 O/U 22.22(7/8")				
Connecting method			Flare piping (Outdoor	gas piping: Brazing)				
Drain	hose			Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs			
nsula	tion for piping			Necessary (both L	quid & Gas lines)			
Acces	sories			Drain hose, Reducer kit, (Please see 1.	5.3), Accessory pipe (Please see 1.5.3)			
Optional parts				Filter kit (l	JM-FL2E)			

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Stendende		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	150 T1	
Heating	20	°C	7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz or 380V 60Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

(5) Indoor unit specifications show the specifications for one unit. Capacity and running characteristics values are shown for the case where three indoor units are combined and run together.

(6) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

(7) Branching pipe set "DIS-TB1" × 1(option). : Pipe of O/U~Branch, : Pipe of Branch~I/U

(5) Duct connected-High static pressure type (FDU)

(a) Single type

Model FDU71VNV

		Model	EDU7 ⁻	VNV ⁽⁵⁾			
Item		Widdei	FDU71V	FDC71VN			
Nomi	nal cooling capacity ⁽¹⁾	kW	7.1 [3.	2~8.0]			
Nomi	nal heating capacity ⁽¹⁾	kW	8.0 [3.	6~9.0]			
Powe	r source		1 Phase, 220)–240V 50Hz			
	Cooling power consumption	kW	2.	08			
	Running current (Cooling)	А	9.2				
ta ⁽³⁾	Power factor (Cooling)	%	9	8			
Operation data ⁽³⁾	Heating power consumption	kW	2.	21			
atio	Running current (Heating)	А	10	.2			
Dper	Power factor (Heating)	%	9	4			
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	17>			
	Noise level	dB(A)	Hi: 41, Lo: 37	48			
	ior dimensions	mm	295 × 850 × 650	750 × 968 × 340			
	nt × Width × Depth reight	kg	40	60			
Refri	gerant equipment	i g		2YC45DXD × 1			
	pressor type & Q'ty						
	ng method			Direct line start			
	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing			
-	erant control		-	Electronic expansion valve			
	gerant						
Juan		kg	-	2.95 [Pre-charged up to the piping length of 30r			
	gerant oil	l	-	0.65 (FVC50K)			
	st control		Microcomputer controlled de-icer				
	andling equipment pe & Q'ty		Centrifugal fan × 2	Propeller fan × 1			
Motor		W	230 × 1	86 × 1			
tartir	ng method		Direct line start	Direct line start			
Air flo	w	СММ	Hi:25, Lo:20	Cooling:60, Heating:50			
Availa	able static pressure	Pa	Standard:50, Max:130	_			
Dutsi	de air intake		Possible (on return duct)	_			
Air fil	lter, Q'ty		Installed on site	_			
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)			
Electr	ic heater	W	_	20 (Crank case heater)			
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)			
	temperature control		Thermostat by electronics	_			
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection			
	lation data gerant piping size	mm (in)	F	Gas line: (15.88(5/8")			
	ecting method	(")	Flare	piping			
	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs			
	tion for piping			iquid & Gas lines)			
	sories			hose			
	nal parts		Dian	-			
Spuol	iai parto		-	-			

prional part

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

Model FDU100VNV

_		Model	FDU10	0VNV ⁽⁵⁾		
Item			FDU100V	FDC100VN		
Nomi	inal cooling capacity ⁽¹⁾	kW	10.0 [4.0~11.2]			
Nomi	inal heating capacity ⁽¹⁾	kW	11.2 [4.0~12.5]			
Powe	er source		1 Phase, 220	0–240V 50Hz		
	Cooling power consumption	kW	2.88			
	Running current (Cooling)	А	12.7			
ita ⁽³⁾	Power factor (Cooling)	%	9	9		
n da	Heating power consumption	kW	2.99			
Operation data ⁽³⁾	Running current (Heating)	А	15	3.1		
Ibel	Power factor (Heating)	%	9	9		
U	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	25>		
	Noise level	dB(A)	Hi: 42, Lo: 37	49		
	rior dimensions	mm	350 × 1370 × 650	845 × 970 × 370		
-	ht × Width × Depth					
	veight	kg	63	74		
	gerant equipment pressor type & Q'ty		-	RMT5126MDE2 × 1		
Startin	ng method		-	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	gerant control		·	Electronic expansion valve		
Refri	gerant		R4	10A		
Quan	ntity	kg	_	3.8 [Pre-charged up to the piping length of 30m]		
Refri	gerant oil	l	-	0.9 (M-MA68)		
Defro	st control		Microcomputer of	controlled de-icer		
	andling equipment /pe & Q'ty		Centrifugal fan × 2	Propeller fan × 1		
Aotor	r	W	280 × 1	86 × 1		
tartii	ng method		Direct line start	Direct line start		
Air fle	ow	СММ	Hi:34, Lo:27	Cooling:75, Heating:73		
Avail	able static pressure	Pa	Standard:50, Max:130	-		
Dutsi	ide air intake		Possible (on return duct)	-		
Air fil	lter, Q'ty		Installed on site	-		
hock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
lectr	ic heater	W	-	20 (Crank case heater)		
	ation control ation switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)		
-	a temperature control		Thermostat by electronics	_		
	ty equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	llation data gerant pining size	mm (in)		Gas line: ¢15.88(5/8")		
Refrigerant piping size Connecting method		(iii)	Flara	piping		
C	n hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
				iquid & Gas lines)		
Insulation for piping			Drair			
Accessories						

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

Model FDU100VSV

	Model FD0100V3V	Model	EDU10	0VSV ⁽⁵⁾		
Item		Model	FDU100V	FDC100VS		
Nomi	nal cooling capacity ⁽¹⁾	kW	10.0 [4.	0~11.2]		
Nomi	nal heating capacity ⁽¹⁾	kW	11.2 [4.0~12.5]			
Powe	er source		3 Phase, 380	0-415V 50Hz		
	Cooling power consumption	kW	2.88			
	Running current (Cooling)	А	4.3			
ta ⁽³⁾	Power factor (Cooling)	%	9	7		
Operation data ⁽³⁾	Heating power consumption	kW	2.	99		
atio	Running current (Heating)	А	4	4		
ber	Power factor (Heating)	%	9	9		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	16>		
	Noise level	dB(A)	Hi: 42, Lo: 37	49		
Exter	ior dimensions					
	nt × Width × Depth	mm	350 × 1370 × 650	845 × 970 × 340		
Vet w	veight	kg	63	74		
•	gerant equipment pressor type & Q'ty		_	RMT5126MDE3 × 1		
Startir	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	gerant control		_	Electronic expansion valve		
Refri	gerant		R4 ⁻	10A		
Quan	tity	kg	_	3.8 [Pre-charged up to the piping length of 30m]		
Refri	gerant oil	l	_	0.9 (M-MA68)		
Defro	st control		Microcomputer of	controlled de-icer		
	andling equipment ype & Q'ty		Centrifugal fan × 2	Propeller fan × 1		
Aotor	-	W	280 × 1	86 × 1		
Startir	ng method		Direct line start	Direct line start		
Air fl	ow	СММ	Hi:34, Lo:27	Cooling:75, Heating:73		
Avail	able static pressure	Pa	Standard:50, Max:130	_		
Dutsi	ide air intake		Possible (on return duct)	-		
Air fi	lter, Q'ty		Installed on site	-		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electr	ic heater	W	-	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)		
Room	temperature control		Thermostat by electronics	-		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	llation data gerant piping size	mm (in)	Liquid line:	Gas line:		
Connecting method			Flare	piping		
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
[nsula	tion for piping		t i i i i i i i i i i i i i i i i i i i	iquid & Gas lines)		
Acces	sories		Drair	hose		
	nal parts					

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	0, 1, 1		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	160 T1	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

Model FDU125VNV

		Model	FDU12	5VNV ⁽⁵⁾		
Item		moder	FDU125V	FDC125VN		
Nomi	nal cooling capacity ⁽¹⁾	kW	12.5 [5.	0~14.0]		
Nomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.0~16.0]			
Powe	er source		1 Phase, 220	0–240V 50Hz		
	Cooling power consumption	kW	4.04			
	Running current (Cooling)	А	17.8			
ta ⁽³⁾	Power factor (Cooling)	%	9	9		
Operation data ⁽³⁾	Heating power consumption	kW	3.	79		
atio	Running current (Heating)	А	16	5.6		
ber	Power factor (Heating)	%	9	9		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	27>		
	Noise level	dB(A)	Hi: 43, Lo: 38	Cooling:50, Heating:51		
Exter	ior dimensions		250 - 1270 - 650	0.4E ++ 0.70 ++ 0.70		
	nt × Width × Depth	mm	350 × 1370 × 650	845 × 970 × 370		
let w	veight	kg	63	74		
	gerant equipment pressor type & Q'ty		-	RMT5126MDE2 × 1		
tartir	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
efrig	gerant control		_	Electronic expansion valve		
Refri	gerant		R41	10A		
Quan	tity	kg	_	3.8 [Pre-charged up to the piping length of 30m		
lefri	gerant oil	l	_	0.9 (M-MA68)		
)efro	st control		Microcomputer of	controlled de-icer		
	andling equipment ype & Q'ty		Centrifugal fan × 2	Propeller fan × 1		
lotor		W	370 × 1	86 × 1		
tartir	ng method		Direct line start	Direct line start		
\ir fl	ow	СММ	Hi:42, Lo:33.5	Cooling:75, Heating:73		
vail	able static pressure	Pa	Standard:50, Max:130	_		
Dutsi	ide air intake		Possible (on return duct)	-		
ir fi	lter, Q'ty		Installed on site	_		
hock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
lectr	ic heater	W	-	20 (Crank case heater)		
	ation control		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN KIT2 E)	– (Indoor unit side)		
-	tion switch temperature control		Wireless kit (Optional : RCN-KIT3-E) Thermostat by electronics	_		
			Internal thermostat for fan motor.			
	y equipment		Frost protection thermostat.	Anomalous discharge temperature protection		
	llation data gerant piping size	mm (in)	Liquid line:	Gas line: 015.88(5/8")		
Connecting method			Flare	piping		
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
nsula	tion for piping		Necessary (both L	iquid & Gas lines)		
Acces	sories		Drain	hose		
	nal parts					

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	0, 1, 1		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	160 T1	
Heating	20°C		7°C	6°C	ISO-T1	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

Model FDU125VSV

		Model	FDU12	5VSV ⁽⁵⁾		
Item		winder	FDU125V	FDC125VS		
Nomi	nal cooling capacity ⁽¹⁾	kW	12.5 [5.	0~14.0]		
Nomi	nal heating capacity ⁽¹⁾	kW	14.0 [4.	0~16.0]		
Powe	r source			–415V 50Hz		
	Cooling power consumption	kW	4.04			
	Running current (Cooling)	А	6.0			
ta ⁽³⁾	Power factor (Cooling)	%	97			
Operation data ⁽³⁾	Heating power consumption	kW	3.79			
atio	Running current (Heating)	А	5	.6		
ber	Power factor (Heating)	%	9	8		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	18>		
	Noise level	dB(A)	Hi: 42, Lo: 38	Cooling:50, Heating:51		
Exter	ior dimensions		250 1270 650			
Heigh	$ht \times Width \times Depth$	mm	350 × 1370 × 650	845 × 970 × 370		
let w	veight	kg	63	74		
	gerant equipment pressor type & Q'ty		_	RMT5126MDE3 × 1		
Startin	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	erant control		_	Electronic expansion valve		
Refrig	gerant		R4	10A		
Quan	tity	kg	-	3.8 [Pre-charged up to the piping length of 30n		
Refrig	gerant oil	l	_	0.9 (M-MA68)		
Defros	st control		Microcomputer of	controlled de-icer		
	andling equipment		Centrifugal fan × 2	Propeller fan × 1		
an ty Motor	pe & Q'ty	W	370 × 1	86 × 1		
	ng method		Direct line start	Direct line start		
Air flo	-	СММ	Hi:42, Lo:33.5	Cooling:75, Heating:73		
	able static pressure	Pa	Standard:50, Max:130	_		
	de air intake		Possible (on return duct)	_		
Air fil	lter, Q'ty		Installed on site	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electri	ic heater	W	_	20 (Crank case heater)		
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)		
-	temperature control		Thermostat by electronics	_		
	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection		
	llation data gerant piping size	mm (in)		Gas line: (15.88(5/8")		
Connecting method			Flare	piping		
	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insulation for piping			Necessary (both Liquid & Gas lines)			
Insulat Acces	sories		Drair	hose		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Stendende			
Operation	DB	WB	DB	WB	Standards		
Cooling	27°C	19°C	35°C	24°C	100 71		
Heating	Heating 20°C			6°C	ISO-T1		

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in [~~] show the minimum to maximum range.
(5) Not available in 60Hz.

Model FDU140VNV

		Model	FDU14	0VNV ⁽⁵⁾		
Item		Widdei	FDU140V	FDC140VN		
Nomi	inal cooling capacity ⁽¹⁾	kW	14.0 [5.	0~14.5]		
	inal heating capacity ⁽¹⁾	kW	16.0 [4.0~16.5]			
Powe	er source		1 Phase, 220	0–240V 50Hz		
	Cooling power consumption	kW	4.95			
	Running current (Cooling)	А	21.7			
ta ⁽³⁾	Power factor (Cooling)	%	99			
Operation data ⁽³⁾	Heating power consumption	kW	4.	43		
atio	Running current (Heating)	А	19	9.5		
Dper	Power factor (Heating)	%	9	9		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	28>		
	Noise level	dB(A)	Hi: 43, Lo: 38	51		
	rior dimensions	mm	350 × 1370 × 650	845 × 970 × 370		
-	ht × Width × Depth					
	veight	kg	63	74		
	gerant equipment pressor type & Q'ty		_	RMT5126MDE2 × 1		
Startii	ng method		_	Direct line start		
leat	exchanger		Louver fin & inner grooved tubing	Straight fin & inner grooved tubing		
Refrig	gerant control		-	Electronic expansion valve		
Refri	gerant		R41	10A		
Quan	ntity	kg	_	3.8 [Pre-charged up to the piping length of 30m]		
Refri	gerant oil	l	-	0.9 (M-MA68)		
Defro	st control		Microcomputer of	controlled de-icer		
	andling equipment		Centrifugal fan × 2	Propeller fan × 1		
Motor	ype & Q'ty r	W	370 × 1	86 × 1		
	ng method		Direct line start	Direct line start		
Air fl	-	СММ	Hi:42, Lo:33.5	Cooling:75, Heating:73		
	able static pressure	Pa	Standard:50, Max:130	_		
	ide air intake		Possible (on return duct)	_		
Air fi	lter, Q'ty		Installed on site	_		
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)		
Electr	ric heater	W	_	20 (Crank case heater)		
	ration control ation switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)		
-	a temperature control		Thermostat by electronics	_		
	ty equipment		Internal thermostat for fan motor.	Internal thermostat for fan motor.		
	llation data	mm	Frost protection thermostat.	Anomalous discharge temperature protection.		
	gerant piping size	(in)	Liquid line: (+9.52(3/8")	Gas line:		
Conn	necting method		Flare	piping		
Drain	n hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm)	Holes size $\phi 20 \times 3$ pcs		
Insula	ation for piping			iquid & Gas lines)		
Acces	ssories		Drain	hose		
0.0	nal parts			-		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Standards	
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	160 T1
Heating	20	°C	7°C	6°C	ISO-T1

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in [~~] show the minimum to maximum range.
(5) Not available in 60Hz.

Model FDU140VSV

		Model	FDU14	0VSV ⁽⁵⁾	
Item		model	FDU140V	FDC140VS	
Nominal cooling capacity ⁽¹⁾		kW	14.0 [5.0~14.5]		
Nominal heating capacity ⁽¹⁾		kW	16.0 [4.0~16.5]		
Powe	er source		3 Phase, 380–415V 50Hz		
	Cooling power consumption	kW	4.9	95	
	Running current (Cooling)	А	7.	4	
ta ⁽³⁾	Power factor (Cooling)	%	9	7	
ן da	Heating power consumption	kW	4.	43	
Operation data ⁽³⁾	Running current (Heating)	А	6.6		
pera	Power factor (Heating)	%	97		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	19>	
	Noise level	dB(A)	Hi: 43, Lo: 38	51	
Tyter	ior dimensions	()			
	nt × Width × Depth	mm	350 × 1370 × 650	845 × 970 × 370	
Vet w	veight	kg	63	74	
	gerant equipment pressor type & Q'ty		-	RMT5126MDE3 × 1	
Starting method			_	Direct line start	
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrigerant control			_	Electronic expansion valve	
Refri	gerant		R41	0A	
Quantity		kg	_	3.8 [Pre-charged up to the piping length of 30m	
Refrigerant oil		l	_	0.9 (M-MA68)	
Defro	st control		Microcomputer c	controlled de-icer	
	andling equipment pe & Q'ty		Centrifugal fan × 2	Propeller fan × 1	
Aotor		W	370 × 1	86 × 1	
tartir	ng method		Direct line start	Direct line start	
Air fl	ow	СММ	Hi:42, Lo:33.5	Cooling:75, Heating:73	
vail	able static pressure	Pa	Standard:50, Max:130	_	
Outsi	ide air intake		Possible (on return duct)	-	
Air fil	lter, Q'ty		Installed on site	-	
Shock	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electr	ic heater	W	-	20 (Crank case heater)	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)	
•	temperature control		Thermostat by electronics		
			Internal thermostat for fan motor.	Internal thermostat for fan motor.	
	y equipment		Frost protection thermostat.	Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)	Liquid line: _{\$\$.52(3/8")}	Gas line:	
Connecting method		Flare	piping		
Drain	hose		Connectable with VP20 (I.D. 20mm, O.D. 26mm) Holes size ϕ 20 × 3 pcs		
nsula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Drain	hose	
o	nal parts				

Notes (1) The data are measured at the following conditions.

Itam	Indoor air temperature		Outdoor air		
Operation	DB	WB	DB	WB	Standards
-					
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating 20°C		°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

 $(3)\,$ The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in $[\sim]$ show the minimum to maximum range.

Model FDU200VSV

		Model	FDU20	DOVSV	
Item			FDU200V	FDC200VS	
Nominal cooling capacity ⁽¹⁾		kW	20.0 [7.0~22.4]		
Nominal heating capacity ⁽¹⁾ kW		kW	22.4 [7.6~25.0]		
Powe	r source		3 Phase, 380–415V 50Hz/380V 60Hz		
	Cooling power consumption	kW	6.59/	6.58	
	Running current (Cooling)	А	10.8/	/11.4	
Operation data ⁽³⁾	Power factor (Cooling)	%	88/88		
	Heating power consumption	kW	6.08/5.84		
ratio	Running current (Heating)	А	10.2/10.3		
Del	Power factor (Heating)	%	86/86		
0	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5<2	24>	
	Noise level	dB(A)	Hi: 51	57	
Exter	ior dimensions				
	$ht \times Width \times Depth$	mm	360 × 1570 × 830	1300 × 970 × 370	
	veight	kg	92	122	
	gerant equipment pressor type & Q'ty		-	GTC5150ND70K × 1	
tartir	ng method		-	Direct line start	
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrigerant control			-	Electronic expansion valve	
	gerant		R41		
Quantity		kg	-	5.4 [Pre-charged up to the piping length of 30n	
Refrigerant oil		l	-	1.45 (M-MA32R)	
	st control		Microcomputer c	ontrolled de-icer	
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan $\times 2$	
Aotor	-	W	270 × 2	86 × 2	
Startir	ng method		Direct line start	Direct line start	
Air fl	ow	СММ	Hi: 51/60	Cooling:150, Heating:145	
Avail	able static pressure	Pa	Standard:100, Max:200	-	
Outsi	ide air intake		Possible (on return duct)	-	
Air fil	lter, Q'ty		Installed on site	_	
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
Electr	ic heater	W	-	33 (Crank case heater)	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	- (Indoor unit side)	
Room	temperature control		Thermostat by electronics	_	
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)	n		
	ecting method	. /	Brazing piping (Outdoo	or Liquid piping: Flare)	
	hose		Connectable with VP25 (I.D. 25mm, O.D. 32mm) Holes size ϕ 20		
[nsula	tion for piping		Necessary (both L		
	sories		Reducer kit (Please see 1.5.3), A	ccessory pipe (Please see 1.5.3)	
	nal parts			-	

Notes (1) The data are measured at the following conditions.

Item Indoor air temper		emperature	ature Outdoor air temperature		Stendende
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20°C		7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in [\sim] show the minimum to maximum range.

(5) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

Model FDU250VSV

		Model	FDU2	50VSV	
Item			FDU250V FDC250VS		
Nomi	nal cooling capacity ⁽¹⁾	kW	25.0 [10.0~28.0]		
Nominal heating capacity ⁽¹⁾ kV		kW	28.0 [9.5~31.5]		
Powe	r source		3 Phase, 380–415V 50Hz/380V 60Hz		
	Cooling power consumption	kW	9.91/	10.21	
_	Running current (Cooling)	А	15.7	/17.0	
1ta ⁽³⁾	Power factor (Cooling)	%	91/91		
on da	Heating power consumption	kW	8.50/8.22		
Operation data ⁽³⁾	Running current (Heating)	А	14.4/14.7		
	Power factor (Heating)	%	85/85		
	Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <	27>	
	Noise level	dB(A)	Hi: 51	Cooling:57, Heating:58	
	ior dimensions nt × Width × Depth	mm	360 × 1570 × 830	1505 × 970 × 370	
	, veight	kg	92	140	
	gerant equipment pressor type & Q'ty		_	GTC5150ND70K × 1	
Startir	ng method		_	Direct line start	
Heat exchanger			Louver fin & inner grooved tubing	Straight fin & inner grooved tubing	
Refrigerant control			-	Electronic expansion valve	
Refrigerant			R41	10A	
Quantity		kg	-	7.2 [Pre-charged up to the piping length of 30n	
Refrigerant oil		l	-	1.45 (M-MA32R)	
	st control		Microcomputer c	controlled de-icer	
	andling equipment pe & Q'ty		Centrifugal fan × 4	Propeller fan × 2	
Motor		W	270 × 2	86 × 2	
Startir	ng method		Direct line start	Direct line start	
Air fl	DW	СММ	Hi: 68/80	Cooling:150, Heating:145	
Avail	able static pressure	Pa	Standard:100, Max:200		
Outsi	de air intake		Possible (on return duct)		
	lter, Q'ty		Installed on site		
	& vibration absorber		Rubber sleeve (for fan motor)	Rubber sleeve (for compressor)	
	ic heater	W	_	33 (Crank case heater)	
	ation control tion switch		Wired remote control switch (Optional : RC-E3) Wireless kit (Optional : RCN-KIT3-E)	– (Indoor unit side)	
Room	temperature control		Thermostat by electronics		
Safet	y equipment		Internal thermostat for fan motor. Frost protection thermostat.	Internal thermostat for fan motor. Anomalous discharge temperature protection	
	llation data gerant piping size	mm (in)			
	ecting method		Brazing piping (Outdo	or liquid piping: Flare)	
Drain	hose		Connectable with VP25 (I.D. 25mm, O.D. 32mm)	Holes size $\phi 20 \times 3$ pcs	
Insula	tion for piping		Necessary (both L	iquid & Gas lines)	
Acces	sories		Reducer kit (Please see 1.5.3), A	accessory pipe (Please see 1.5.3)	
	nal parts		Reducer kit (Flease see 1.5.5), Recessory pipe (Flease see 1.5.5)		

Notes (1) The data are measured at the following conditions.

Item	Indoor air temperature		Outdoor air temperature		Stendards
Operation	DB	WB	DB	WB	Standards
Cooling	27°C	19°C	35°C	24°C	ISO-T1
Heating	20	°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(3) The operation data indicate when the air-conditioner is operated at 400V 50Hz.

(4) Values in [\sim] show the minimum to maximum range.

(5) Be sure to use the accessory pipe to connect service valve on the gas side with the field pipe.(Refer to the 1.5.3).

1.2.2 Range of usage & limitations

Item	Models	40, 50, 60	71~140	200, 250		
Indoor return air ten (Upper, lower limits)						
Outdoor air tempera (Upper, lower limits)		Please see the next page.				
Operating temperate	ıre	When used under	-5°C, install a snow hood (opti	on). (71~250 only)		
Indoor unit atmosph temperature and hu		Dew point temp	erature: 28°C or less, relative humic	lity: 80% or less		
Airflow volume/static pressure		Use ducts and blow outlets of better heat insulation within the characteristics of blower. (FDUM, FDU)				
Air filter		Always install air filter (procured at site) at a place convenient for maintenance. (FDUM,FDU)				
Heat insulation of re	frigerant pipes	Heat insulation of 20 mm or more in thickness is necessary in the ceiling, etc, where the relative humidity exceeds 70%.				
Heat insulation of d	rain pipes	Heat insulation of 10 mm or more in thickness is necessary in the ceiling, etc, where the relative humidity exceeds 70%.				
Refrigerant line (one	e way) length	Max. 30m	Max. 50m	Max. 70m* : Note (3)		
Vertical height difference between outdoor unit and indoor unit		Max. 20m (Outdoor unit is higher) Max. 20m (Outdoor unit is lower)	Max. 30m (Outdoor unit is higher) Max. 15m (Outdoor unit is lower)			
Installation site		The outline drawing contains restrictions concerning the installation space. Install the indoor unit 2.5m or above higher than the floor surface.				
Power source voltage		Rating ± 10%				
Voltage at starting		Min. 85% of rating				
Compressor	Cycle Time	7 minutes o	r more (from OFF to OFF) or (from	ON to ON)		
ON-OFF Frequency	Stop Time		3 minutes or more			

Note (1) Do not install the unit at the following places.

• Places exposed to oil splashes or steam (e.g. kitchens and machine plants).

Places where inflammable gas may leak.

• Places containing a great amount of sulfide gases (e.g. hot spring area).

• Places directly exposed to sea breeze (e.g. coastal area).

• Places containing acid or alkaline air.

• Places adjacent to equipment generating electromagnetic waves or high-frequency waves.

Places sucking the exhaust gas from heat exchanger.

• Do not install the unit on an object moistened with water.

• Places where carbon fiber and metal particles, powder, etc. are floating.

• Places where chimney smoke is hanging.

• Places at an elevation of 1000m and above.

• Places splashed with water (laundry room, etc.).

• The indoor unit is not protected against water penetration.

• Do not install indoor units of twin, triple and double-twin specifications separately in a room with partition.

• Where matters affecting devices, such as sulfuric gas, chlorine gas, acid, alkali, etc, may generate or accumulate.

• Where cosmetics or special sprays are used frequently.

• Installation on mobile thing such as vehicle, ship, etc.


• Where snow falls heavily. (Including where snow melting agent is spreaded)

• Where light beams that affect the receiving device fly arond, in case of the wireless specification.

(2) If ambient temperature and humidity exceed the above values, add polyurethane foam insulation to the outer plate of indoor unit (t10 and above).

(3) When ϕ 22.22 gas pipe is used for piping lengths with the * mark, let the maximum one-way length be 30m.

(4) For details of the pipe length of twin, triple or double-twin specification, refer to page 89.

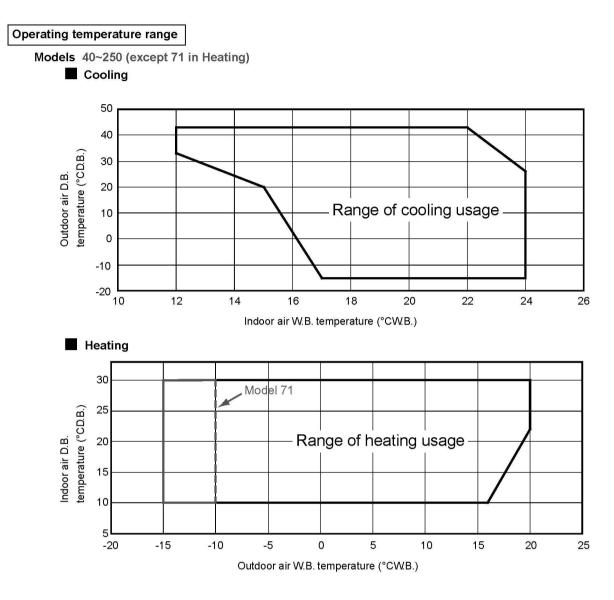

"CAUTION" Cooling operation under low ambient air temperature conditions

PAC models can be operated in cooling mode at low ambient air temperature condition within above temperature range. However in case of severely low temperature conditions if the following precaution is not observed, it may not be operated in spite of operable temperature range mentioned above and cooling capacity may not be established under certain conditions. Regarding the decrease of cooling capacity, refer to 1.2.6 capacity compensation coefficient graph.

[Precaution]

In case of severely low temperature condition

- 1) Install the outdoor unit at the place where strong wind cannot blow directly into the outdoor unit.
- 2) If there is no installation place where can prevent strong wind from directly blowing into the outdoor unit, mount the flex flow adapter (prepared as optional part) or like such devices onto the outdoor unit in order to divert the strong wind.


[Reason]

Under the low ambient air temperature conditions of -5° C or lower, the outdoor fan is controlled at lower or lowest speed by outdoor fan control, but if strong wind directly blow into the outdoor unit, the outdoor heat exchanger temperature will drop more. This makes high and low pressures to drop as well. This low pressure drop makes the indoor heat exchanger temperature to drop and will activate anti-frost control at indoor heat exchanger at frequent intervals, that cooling operation may not be established for any given time.

Height and length restrictions for refrigerant piping

Twin type

Triple type



Models 71~140


One-way pipe length (m) $L + \ell a + \ell b \le 50$ Branch pipe length (m) $I \ell a - \ell bI \le 10, \ \ell a \le 30, \ \ell b \le 30$ Difference in height between indoor units (m) h=0.5 or less

Models 200, 250

One-way pipe length (m) $L + \ell a \le 70$, $L + \ell b \le 70$ Branch pipe length (m) $I \ell a - \ell b I \le 10$, $\ell a \le 30$, $\ell b \le 30$ Difference in height between indoor units (m) h=0.5 or less

■ The Indoor_outdoor piping length differences among indoor units are less than 3m.

Model 140



One-way pipe length (m) $L + \ell a + \ell b + \ell c \le 50$ Branch pipe length (m) $I \ell a - \ell b | < 3, I \ell a - \ell c | < 3, I \ell b - \ell c | < 3$ $\ell a \le 30, \ell b \le 30, \ell c \le 30$ Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less, h3=0.5 or less

Model 200

One-way pipe length (m) $L1 + L2 + \ell a + \ell b + \ell c \leq 50$

One-way pipe length (m) L + ℓ a ≤ 70 , L + ℓ b ≤ 70 , L + ℓ c ≤ 70 Branch pipe length (m) I ℓ a - ℓ b I < 3, I ℓ a - ℓ c I < 3, I ℓ b - ℓ c I < 3 ℓ a ≤ 30 , ℓ b ≤ 30 , ℓ c ≤ 30


Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less, h3=0.5 or less

The Indoor_outdoor piping length differences among indoor units are 3m or more.

Branch pipe length (m)

Model 140

Model 200



Indoor unit

Note(1) The unit that requires the longest one-way piping length should be connected to the ℓ a piping line.

Double-twin type

Outdoor unit

 $\begin{array}{ll} \text{One-way pipe length (m)} & \text{L1} + \ell \ a \leq 70, \, \text{L1} + \text{L2} + \ell \ b \leq 70, \, \text{L1} + \text{L2} + \ell \ c \leq 70 \\ \text{Branch pipe length (m)} & 3 \leq \ell \ a - (\text{L2} + \ell \ b) \leq 10, \, 3 \leq \ell \ a - (\text{L2} + \ell \ c) \leq 10, \, \text{I} \ \ell \ b - \ell \ c \ \text{I} \leq 10 \\ \ell \ a \leq 30, \, \text{L2} + \ell \ b \leq 27, \, \text{L2} + \ell \ c \leq 27, \, \text{L2} \leq 5 \end{array}$

 $\ell~a \leq 30, L2 + \ell~b \leq 27, L2 + \ell~c \leq 27, L2 \leq 5$ Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less, h3=0.5 or less

 $3 \leq \ell \ a - (L2 + \ell \ b) \leq 10, \ 3 \leq \ell \ a - (L2 + \ell \ c) \leq 10, \ | \ \ell \ b - \ell \ c \ | \leq 10$

Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less, h3=0.5 or less

Models 200, 250

One-way pipe length (m) L + ℓ 1 + ℓ A \leq 70, L + ℓ 1 + ℓ B \leq 70, L + ℓ 2 + ℓ C \leq 70, L + ℓ 2 + ℓ D \leq 70 Branch pipe length (m) ℓ A - ℓ B \leq 10, ℓ C - ℓ D \leq 10 (ℓ 1 + ℓ A) - (ℓ 2 + ℓ C) \leq 10, (ℓ 1 + ℓ A) - (ℓ 2 + ℓ D) \leq 10 (ℓ 1 + ℓ B) - (ℓ 2 + ℓ C) \leq 10, (ℓ 1 + ℓ B) - (ℓ 2 + ℓ D) \leq 10 ℓ 1 + ℓ A \leq 30, ℓ 1 + ℓ B \leq 30, ℓ 2 + ℓ C \leq 30, ℓ 2 + ℓ D \leq 30 ℓ A + ℓ B \leq 15, ℓ C + ℓ D \leq 15 Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less h3=0.5 or less, h6=0.5 or less

In the illustration the L is main piping and $\ell 1, \ell 2, \ell A, \ell B, \ell C$ and ℓD are branch piping.

- Request
- (1) When the capacity of the indoor unit to be connected is 40, 50 and 60 or less, be sure to use a pipe diameter of ø9.52 for the size of the liquid piping of branch piping (between branch and indoor units). (for double-twin only) For connections to indoor units (liquid piping side dia. ø6.35) use the different diameter adapter coupling that is included in the branch piping kit.
- (2) For the branch be sure to select the specified branch pipe set (sold separately) and then to follow the directions of the instruction manual included in the branch pipe set when installing the piping. Be sure to install the branch piping so that the branch is level.

1.2.3 **Exterior dimensions**


- (1) Indoor unit
- Ceiling cassette-4 way Compact (600 × 600mm)-type (FDTC) (a)

Models FDTC40V, 50V Unit:mm A Outside air opening for ducting Decorative panel ļ 530 (Suspension bolts pitch) 530 (Suspension bolts pitch) A A 348 321 Ħ 541 2 -€ 2 Control Air supply Air return grille 185 box 190 223 □413 21 $\Box 700$ 200 46 Drain hose piece Opening for exit wiring (Accessory) (Installed on site) Drain (Connectable with VP20) Liquid piping □570 ø6.35(1/4") Suspension bolts (M10 or M8) 323 295~325 Gas piping 144 ø12.7(1/2") E 600 or less (Max. Drain lift) d ₿ ₹ 248 195 94 135 Ľ 91 45 or more 35 Hanger plate for suspension bolt Space for installation and service 140 6-ø4 Holes for tapping screws 60 115 Ц[§] 1000 or more Hole 140 Obstacle + 001 Make a space of 4000 or more between 100 the units when installing more than one. VIEW A Notes (1) The model name label is attached on the control box lid inside the air return grille. (2) Prepare the connecting socket (VP20) on site.

- (3) This unit is designed for 2×2 grid ceiling. If it is installed on a ceiling other than 2×2 grid ceiling, provide an inspection port on the control box side.

(b) Ceiling cassette-4 way-type (FDT) Models FDT40V, 50V, 60V, 71V

Unit:mm

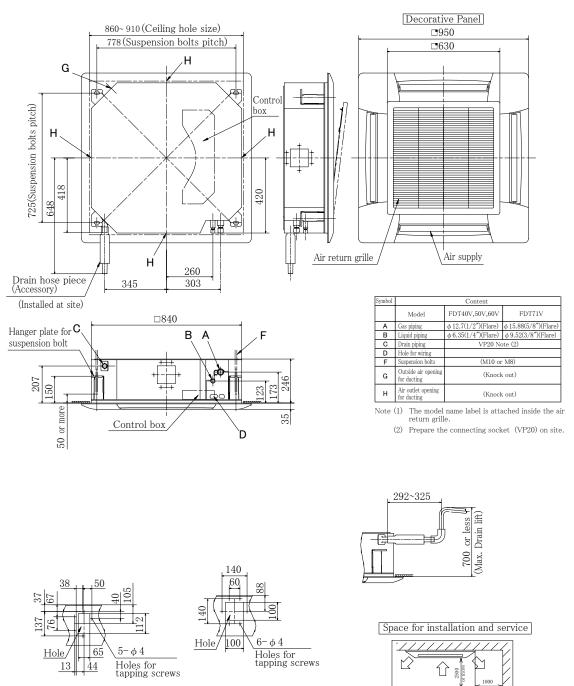



VIEW G


VIEW H


Make a space of 4000 or more between the units when installing more than one.

Obstacle

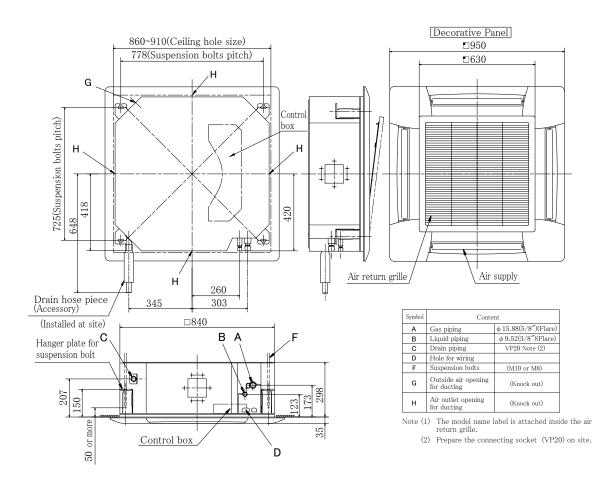










(c) Duct connected-Middle static pressure-type (FDUM) Model FDUM50V


Unit : mm


460

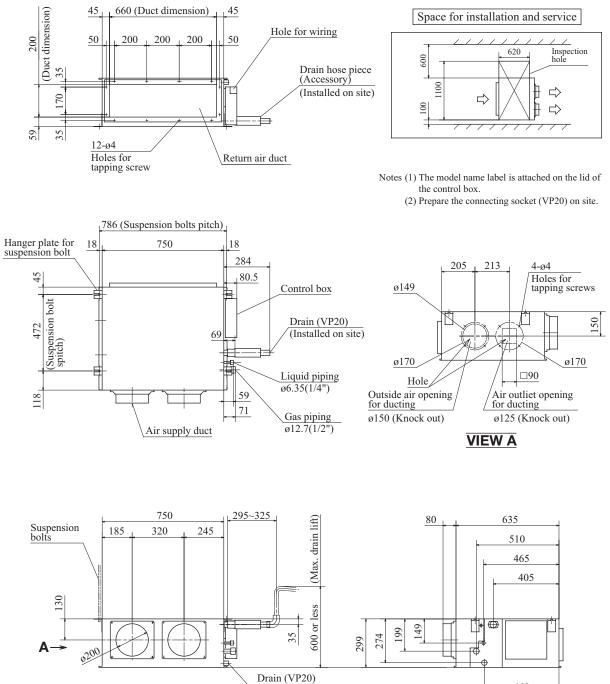


(Gravity drcinage)

Models FDUM60V, 71V

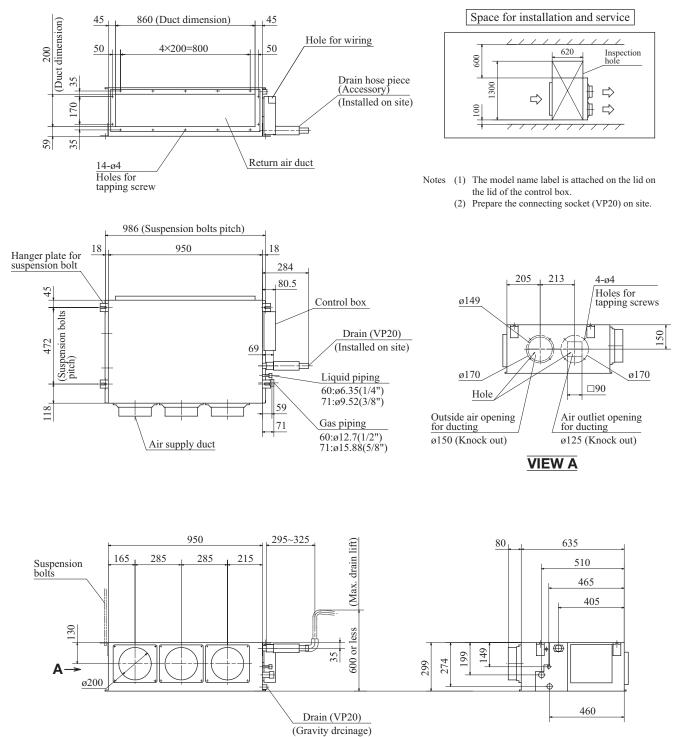


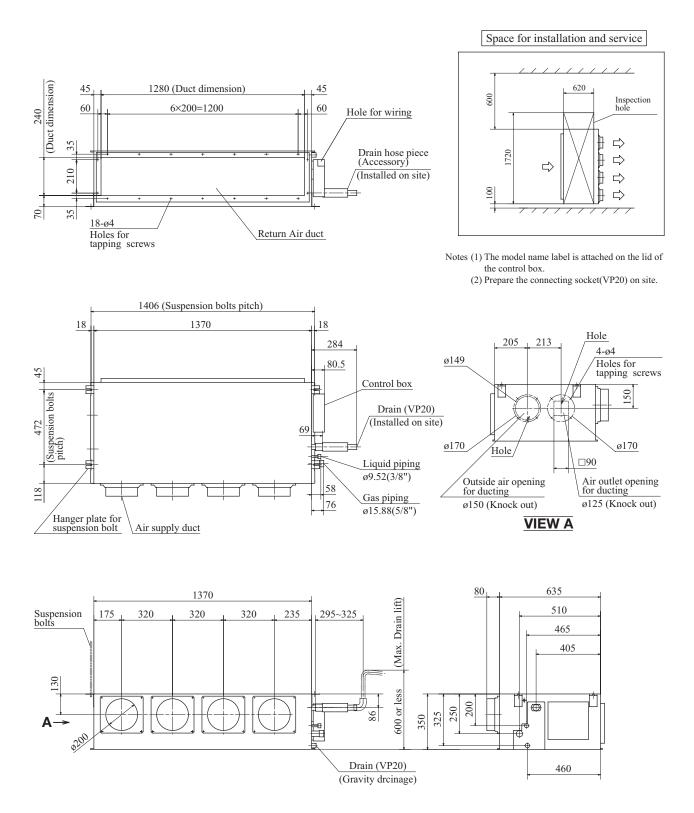



(d) Duct connected-High Static pressure-type (FDU) Model FDU71V





Notes (1) The model name label is attached on the lid of the control box. (2) Prepare the connecting socket (VP20)on site.

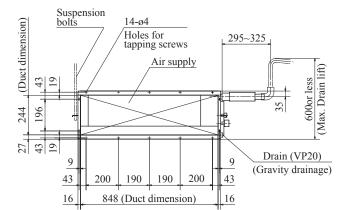









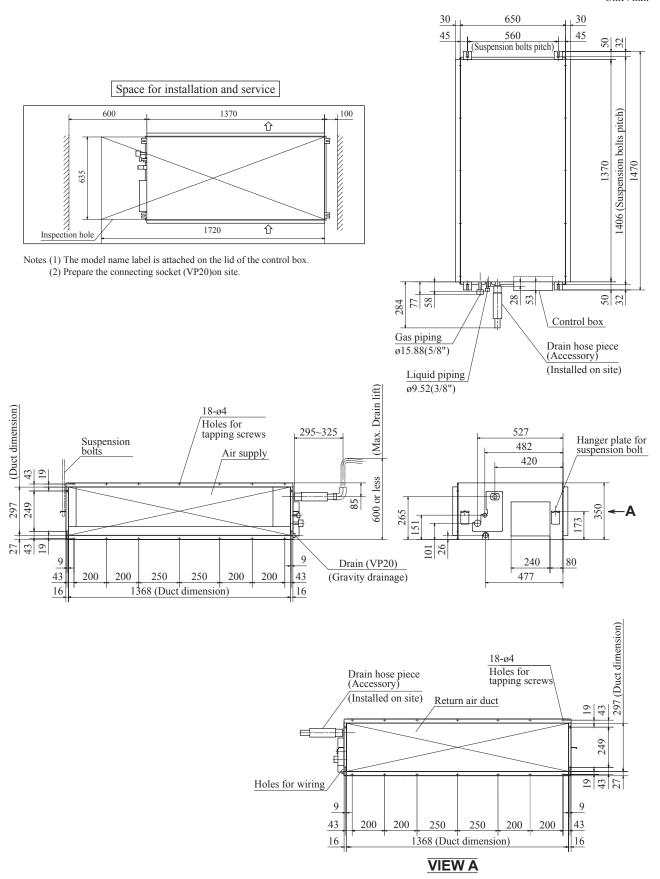

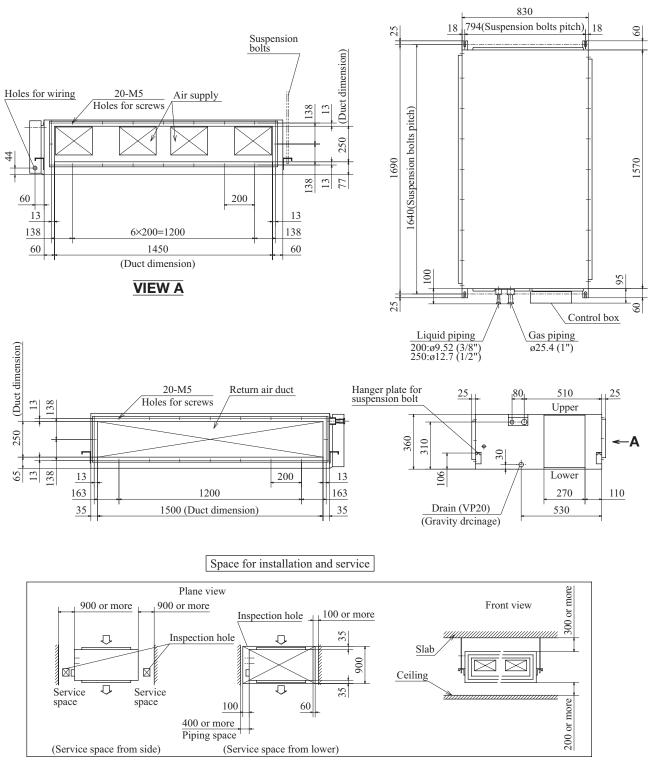


Note (1) The model name label is attached on the side plate of the control box.

(e) Ceiling suspended type (FDEN) Models FDEN40V, 50V

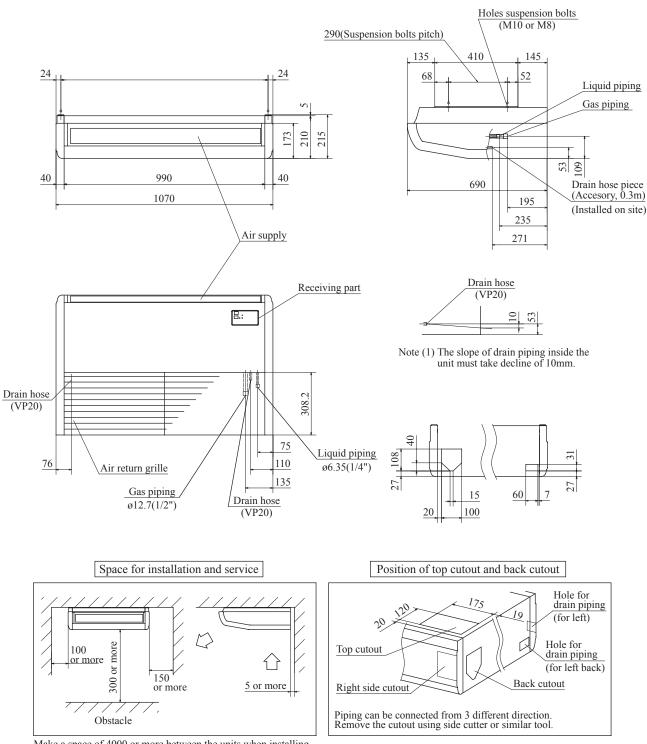


Make a space of 4000 or more between the units when installing more than one.

Note (1) The model name label is attached on the fan casing inside the air return grille.

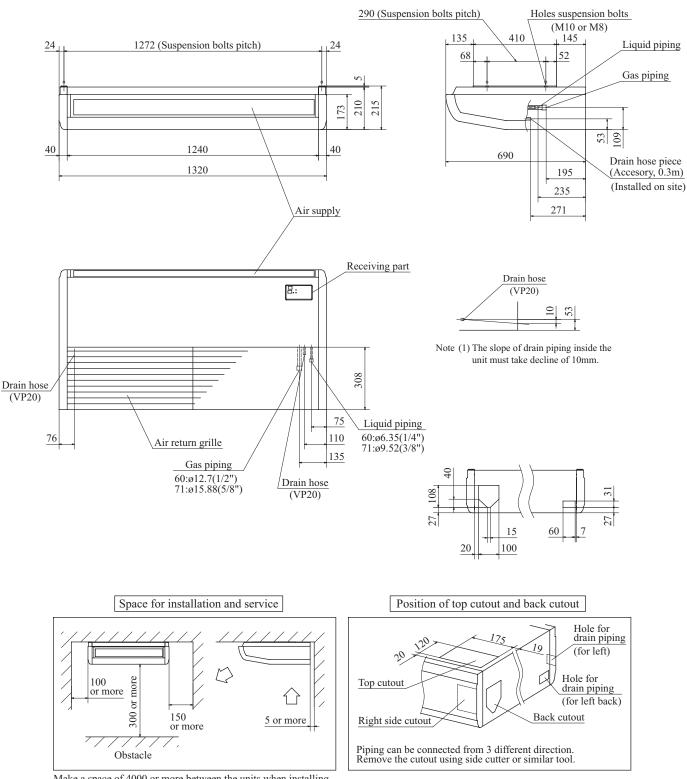

Make a space of 4000 or more between the units when installing more than one.

Note (1) The model name label is attached on the fan casing inside the air return grille.

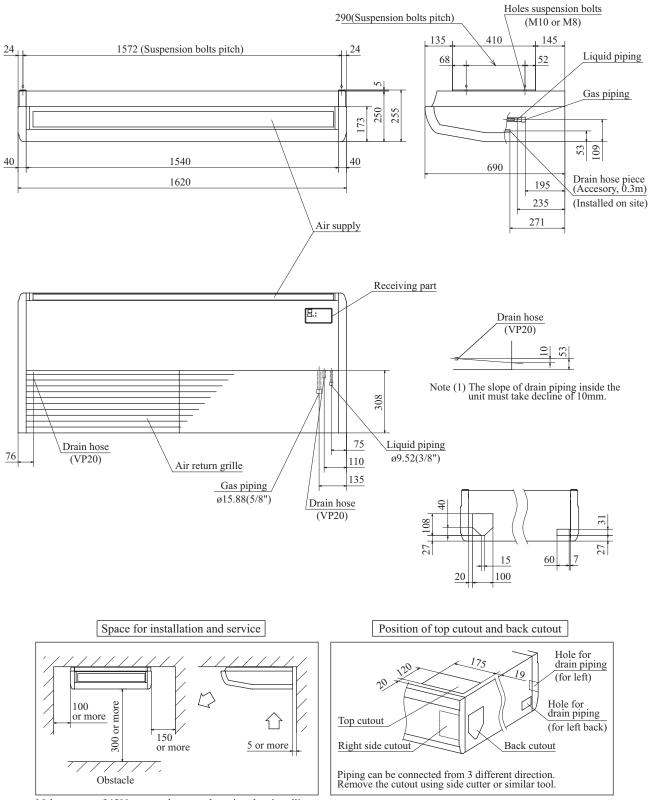


Make a space of 4500 or more between the units when installing more than one.

Note (1) The model name label is attached on the fan casing inside the air return grille.

(2) Remote controller (Optional parts)

(a) Wired remote controller

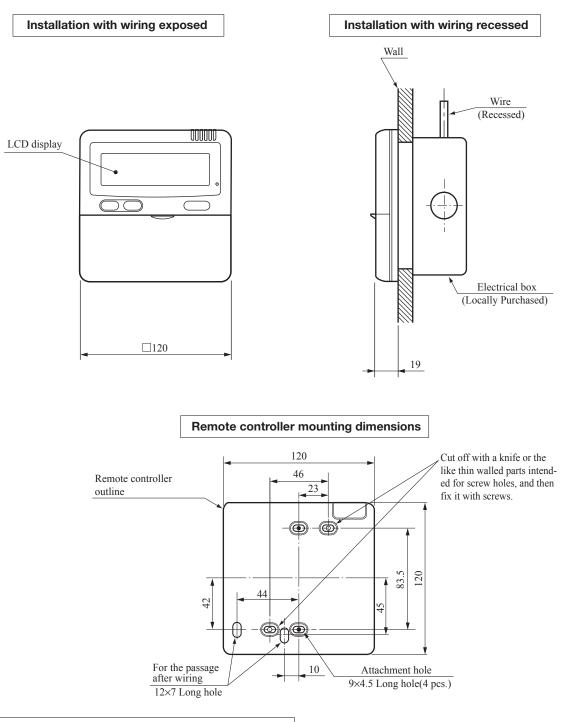

Precaution in Extending the Remote control cord

(1) Wiring of remote controller should use $0.3 \text{mm}^2 \times 2$ core wires or cables (on-site configuration)


② Maximum prolongation of remote controller wiring is 600 m. If the prolongation is over 100m, change to the size below. But, wiring in the remote controller case should be under 0.5mm

But, wiring in the remote controller case should be under 0.5mm². Change the wire size outside of the case according to wire connecting. Waterproof treatment is necessary at the wire connecting section. Be careful about contact failure.

100-200m	
Under 300m	$0.75 \text{ mm}^2 \times 2 \text{ cores}$
Under 400m	$1.25 \text{ mm}^2 \times 2 \text{ cores}$

Under 400m \cdots 1.25 mm² × 2 cores Under 500m \cdots 2.0 mm² × 2 cores

(b) Wireless remote controller

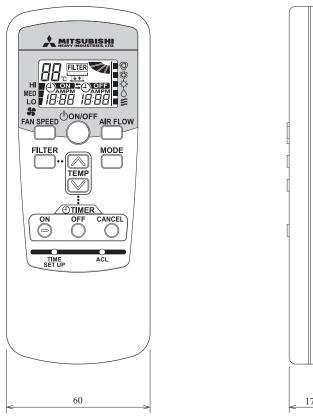


(3) Outdoor unit

Models SRC40ZHX-S, 50ZHX-S, 60ZHX-S

Holes for drain (φ20×5pcs.) 2-R6 J 50.6 24.312 43.5 00 312.5 351.6 290 83.5 17.9∝ 327.3 89 . 510 201 2-15.5×12 71.2 800 Terminal block INVERTER 148. 33.5 ۲ 640Liquid piping $\phi 6.35(1/4'')$ Ground terminal (Flare connecting) 0 12.4Gas piping ϕ 12.7(1/2") (Flare connecting)

Required space for maintenance and air flow



Minimum allowable space to the obstacles


Unit:mm


Installation type Mark	Ι	II	III
L1	Open	280	280
L2	100	75	Open
L3	100	80	80
L4	250	Open	250

Notes

- It is prohibited to install in a space enclosed with walls at four sides.
- (2) Unit must be secured with anchor bolts. Anchor bolt should not protrude more than 15 mm above the surface.
- (3) Where strong winds blow, the blow outlet must be oriented at right angle against the wind direction.
- (4) Secure a space of 1 m or more above the unit.
- (5) Barrier standing in front of the blow outlet must be lower than the height of unit.

Unit: mm

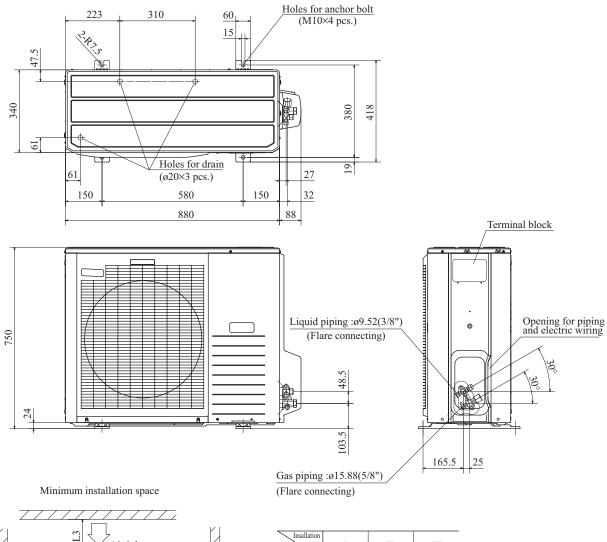




Insallation type Mark	Ι	Π	III
L1	Open	Open	500
L2	300	250	Open
L3	100	150	100
L4	250	250	250

Notes

- (1) It must not be surrounded by walls on the four sides.(2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more the 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction. (4) Leave 1m or more space above the unit.(5) A wall in front of the blower outlet must not exceed the units height.(6) The model name label is attached on the lower right corner of the front.

Models FDC100VN, 125VN, 140VN 100VS, 125VS, 140VS

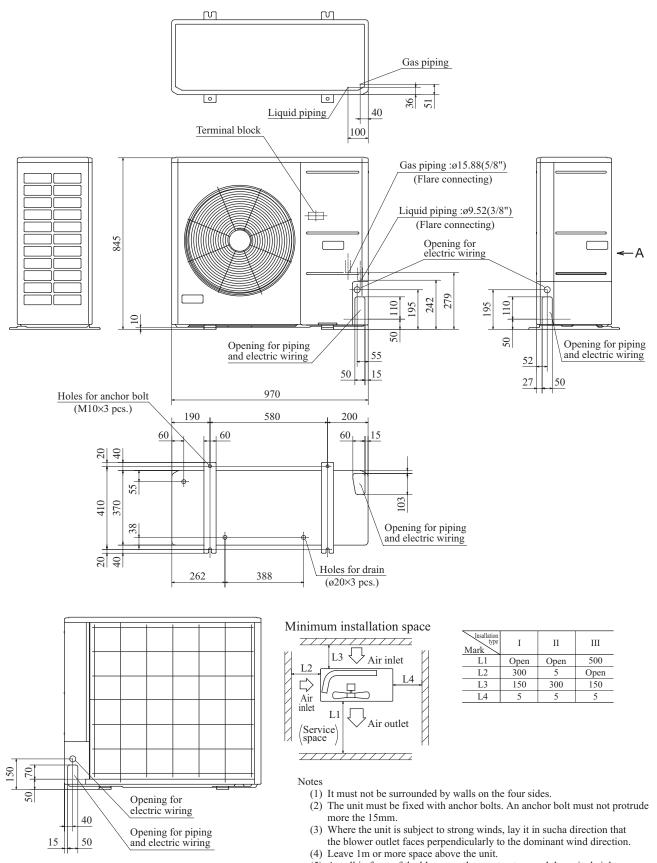


VIEW A

(5) A wall in front of the blower outlet must not exceed the units height.

Unit: mm


(6) The model name label is attached on the lower right corner of the front.

Model FDC200VS

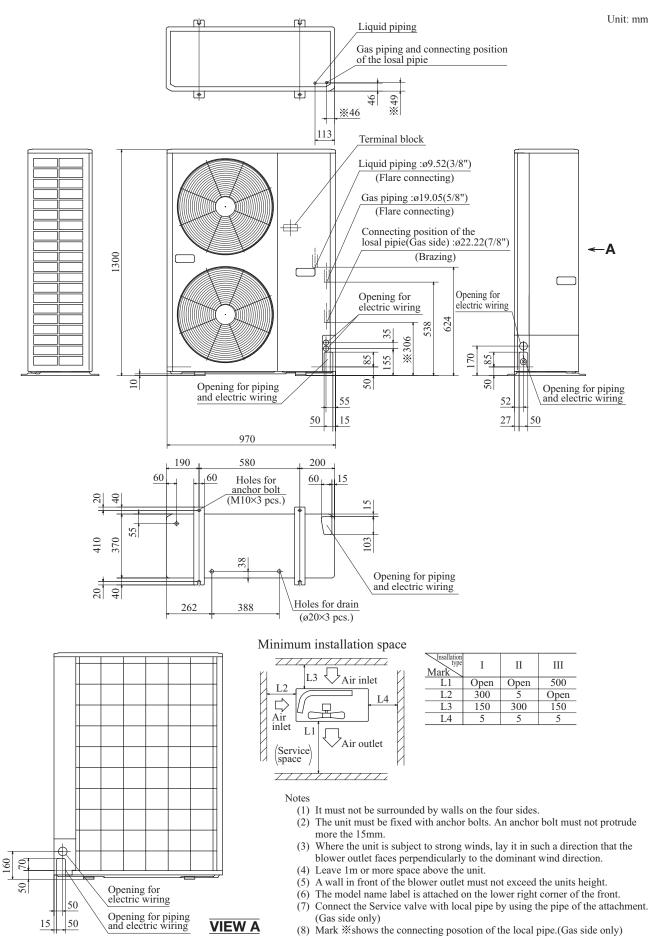


Model FDC250VS

160

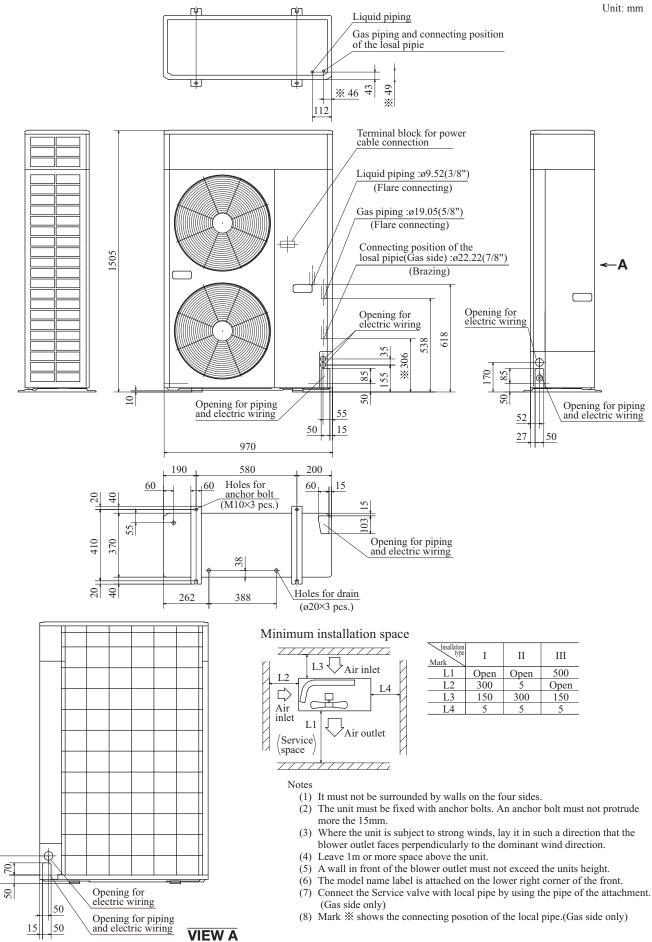


1.2.4 Exterior appearance


- (1) Indoor unit
- (a) Ceiling cassette-4 way Compact (600×600mm)-type (FDTC)



(b) Ceiling cassette-4 way-type (FDT)




(c) Ceiling suspended type (FDEN)

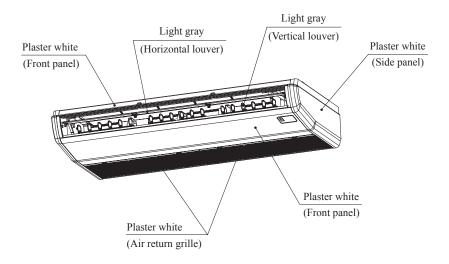


- (d) Duct connected-Middle static pressure-type (FDUM) ---- Cromatofre steel plate
- (e) Duct connected-High Static pressure-type (FDU)-----Cromatofre steel plate
- (2) Outdoor unit

Models SRC40ZHX-S, 50ZHX-S, 60ZHX-S


Model FDC71VN




Models FDC100VN, 125VN, 140VN 100VS, 125VS, 140VS



Models FDC200VS, 250VS







1.2.5 Piping system

(1) Single type


Models 40, 50, 60

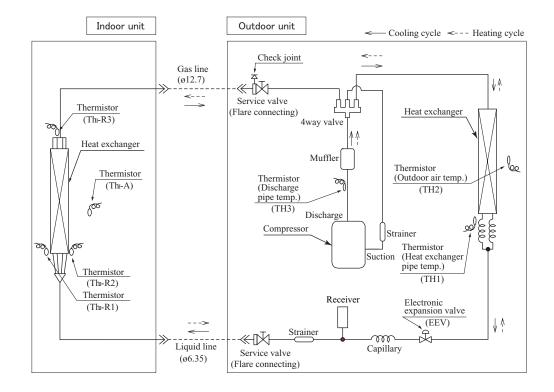


Model 71

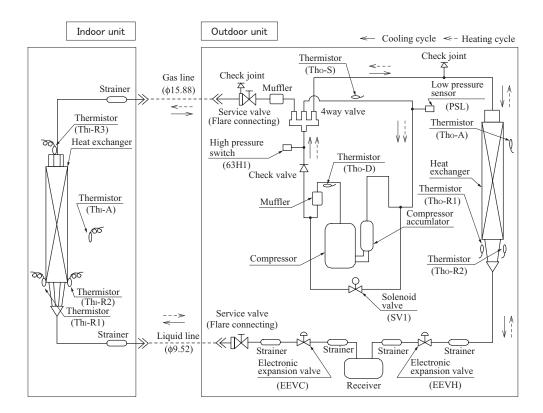


Models 100, 125, 140

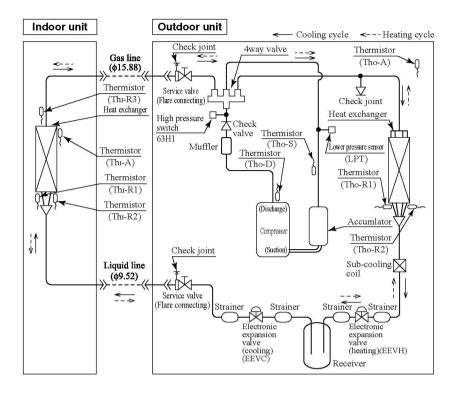


Models 200, 250

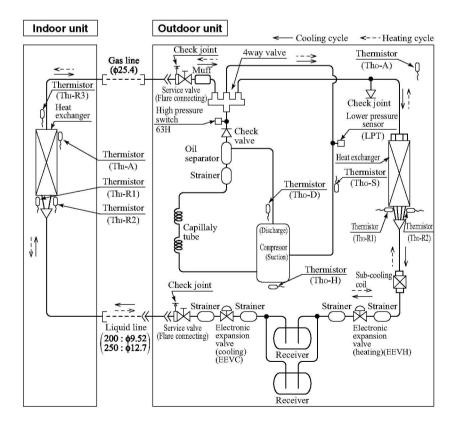


(2) Twin type Model 71

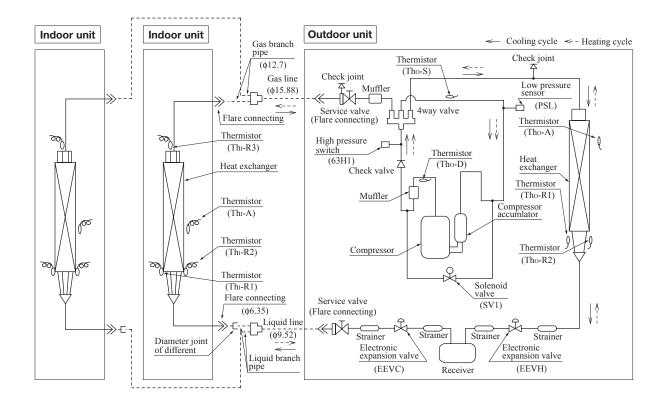


Models 100, 125, 140

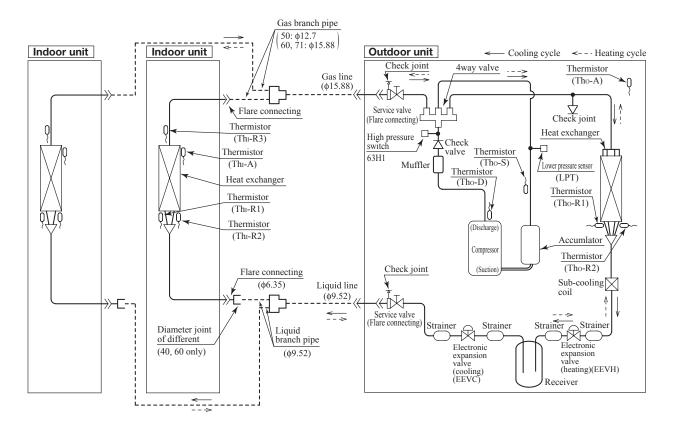


Models 200, 250

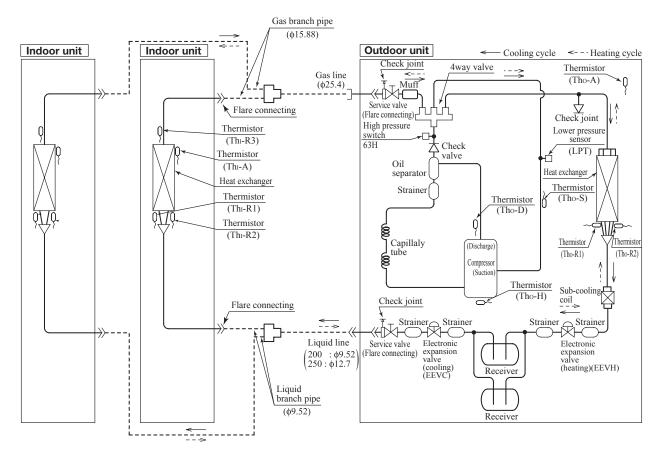

(3) Triple type Model 140

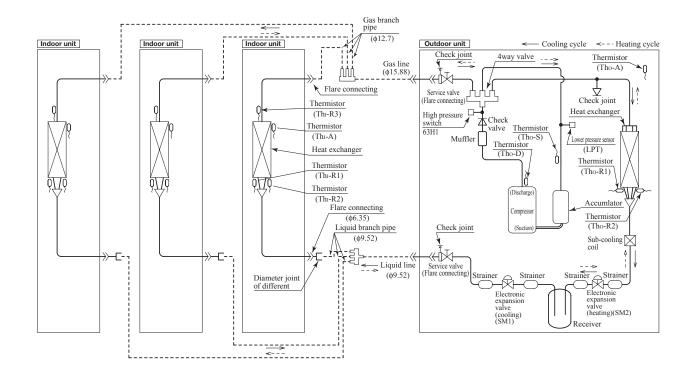


Model 200

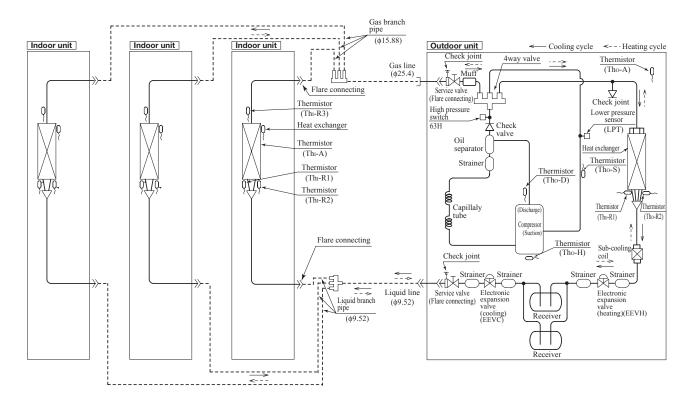

(4) Double twin type

Models 200, 250

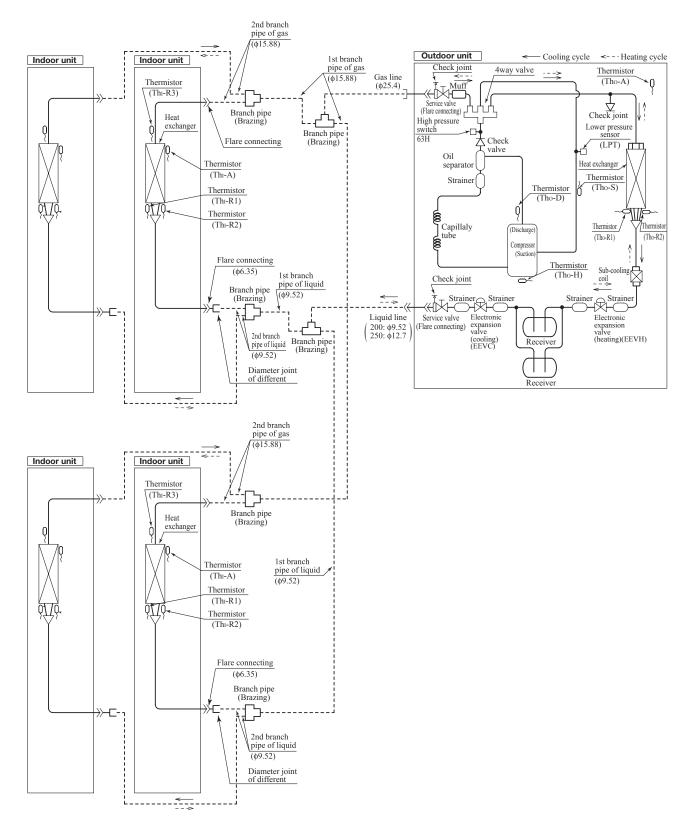

Preset point of the protective devices

Parts name	Mark	Equipped unit	40, 50, 60 model	71, 100, 125, 140 model	200, 250 model						
Thermistor (for protection over- loading in heating)	Thı-R	Indoor unit	OFF 63°C ON 56°C								
Thermistor (for frost prevention)				OFF 1.0°C ON 10°C							
Thermistor (for protection high pressure in cooling.)	Tho-R (TH1)	Outdoor unit	OFF 53°C ON 63°C	OFF 51°C ON 65°C							
Thermistor (for detecting dis- charge pipe temp.)	Tho-D (TH3)	Outdoor unit	OFF 105°C ON 95°C	OFF 115°C OFF 135° ON 85°C ON 90°C							
High pressure switch (for protection)	63H1	Outdoor unit		OFF 4.15MPa ON 3.15MPa							
Low pressure sensor (for protection)	LPT	Outdoor unit		OFF 0.227MPa ON 0.079MPa							

Note(1) Values in ($\$) show in the case of the 40~60 models.


1.2.6 Selection chart

Correct the cooling and heating capacity in accordance with the conditions as follows. The net cooling and heating capacity can be obtained in the following way.


Net capacity = Capacity shown on specification \times Correction factors as follows.

(1) Models 40~60

- (a) Capacity compensation coeffcient
 - (i) Model 40
 - 1) Cooling

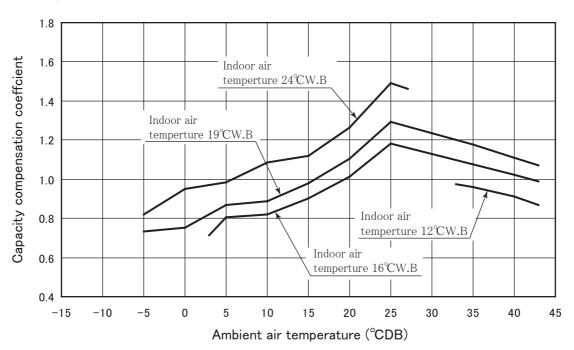




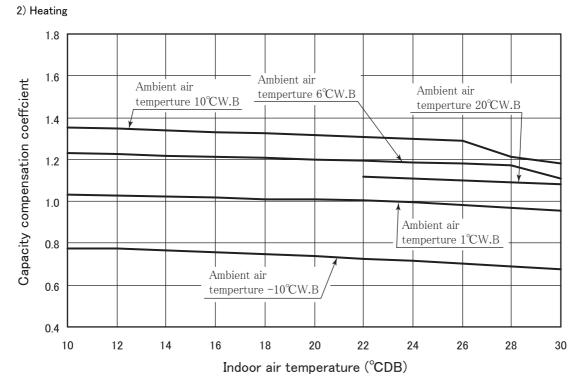






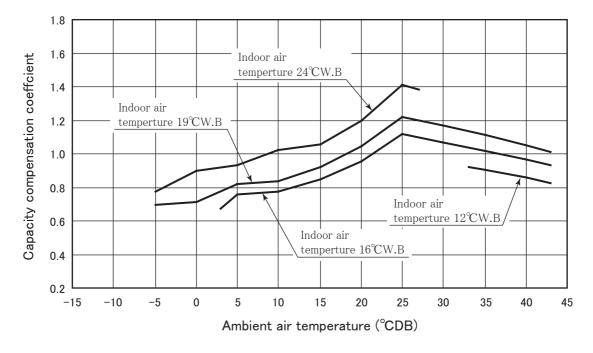

Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

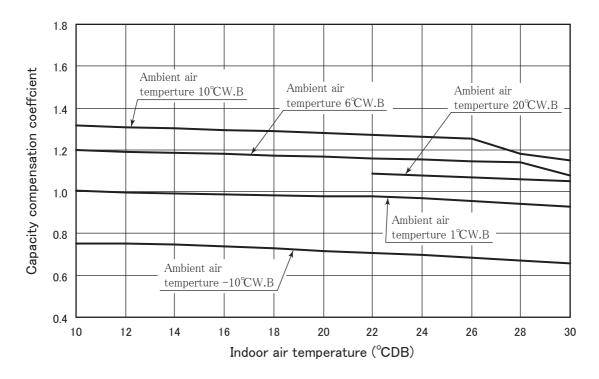


2) Heating


Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.





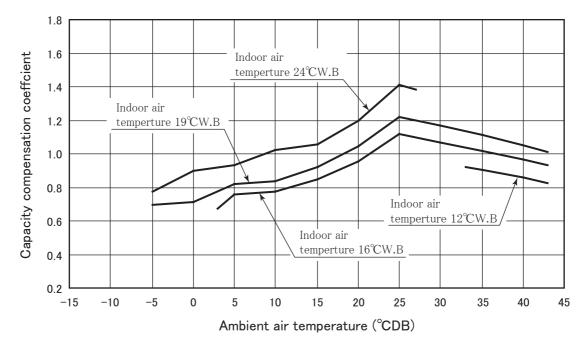

Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

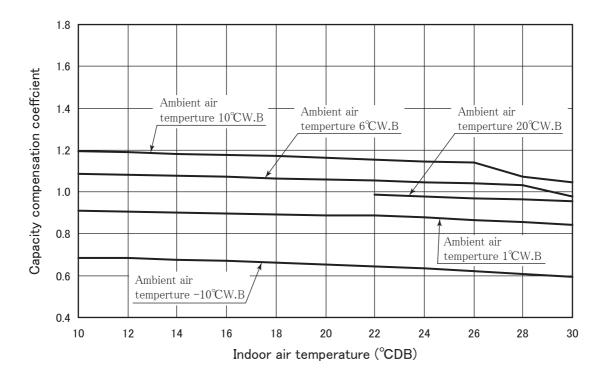


2) Heating

Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.


(b) Power consumption correction factor


(i) Model 40


1) Cooling

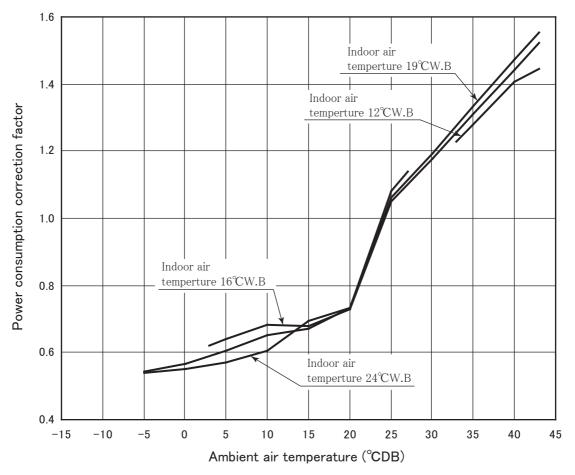


Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

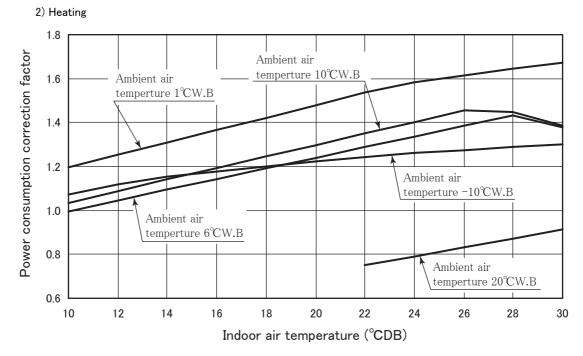




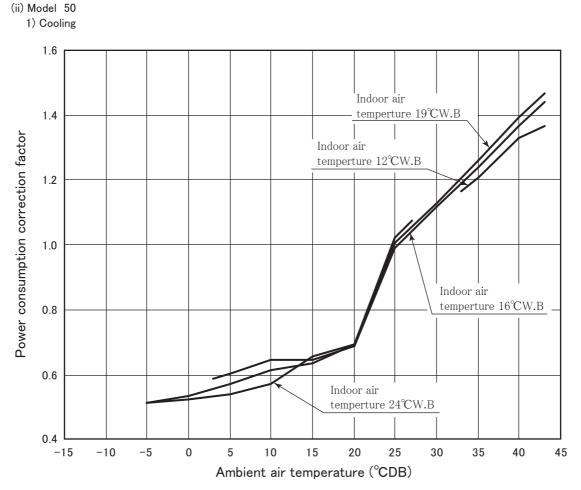


Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

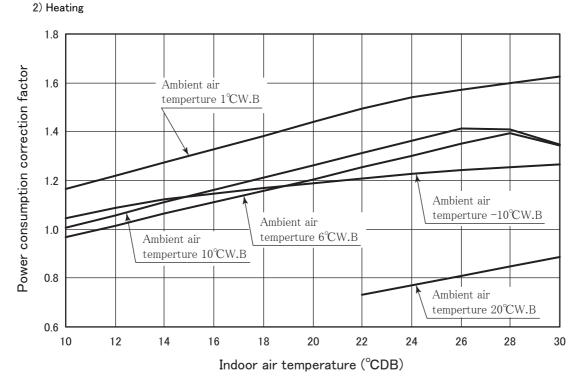

Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

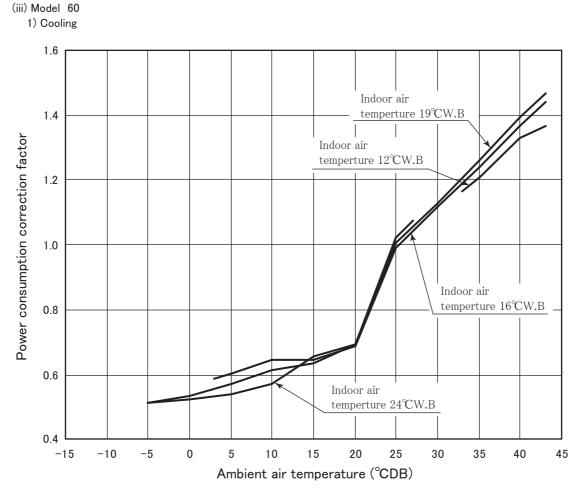


Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

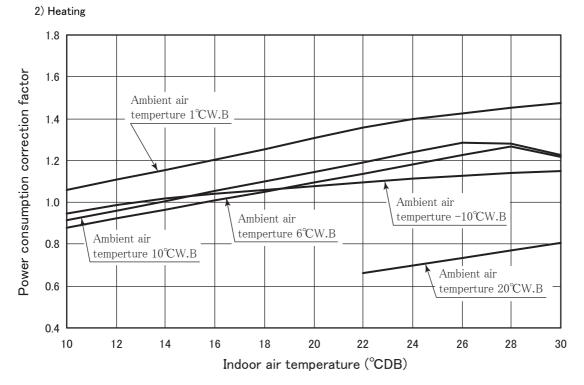

Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

(c) Sensible heet factor (Reference)

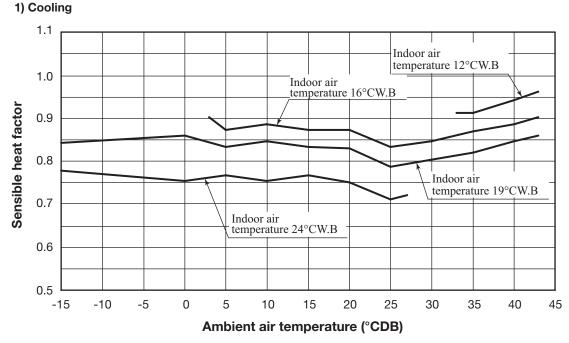

Notes 1) Above figure shows the sensible heat factor at the maximum capacity.


(2) Models 71~250

Caution: In case that the operation during low ambient temperature below -5°C is expected, install the outdoor unit where it is not influenced by natural wind. Otherwise protection control by low pressure will be activated much more frequently and it will cause insufficient capacity or breakdown of the compressor in worst case.

(a) Capacity compensation coeffcient


1) Cooling

a) Model 71

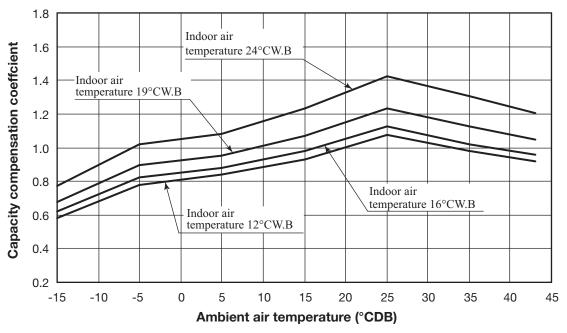


Notes 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

b) Models 100,125

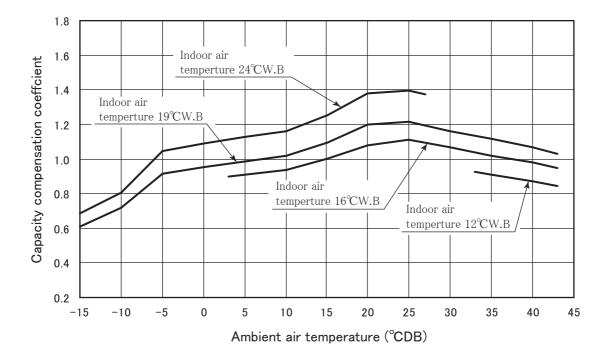


Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

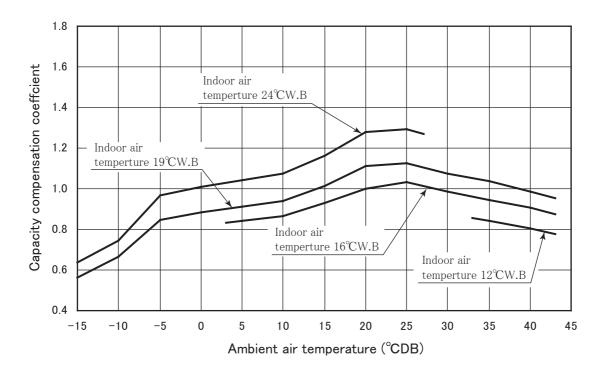

c) Model 140


Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

d) Model 200,250

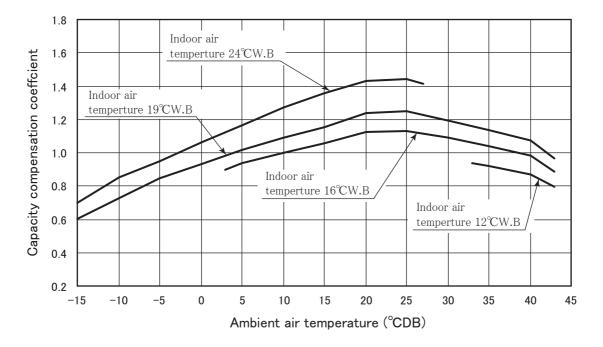


Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.



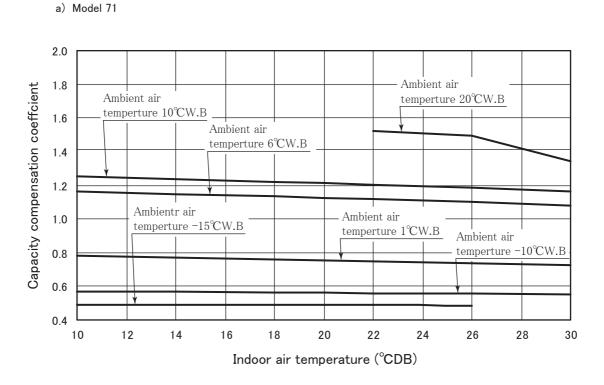


Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

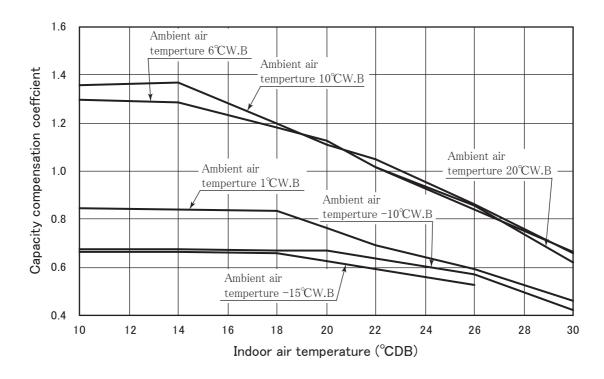


b) Models 100,125

Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

c) Model 140

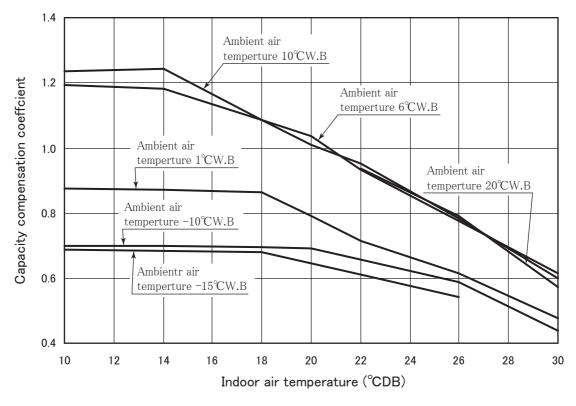

Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.

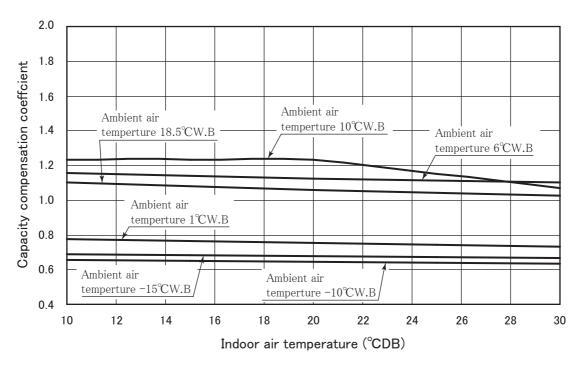


d) Models 200,250

Note 1) Above figure shows the compensation coefficient for the rated capacity at the maximum capacity.


(a) Power consumption coeffcient factor

1) Cooling


a) Model 71

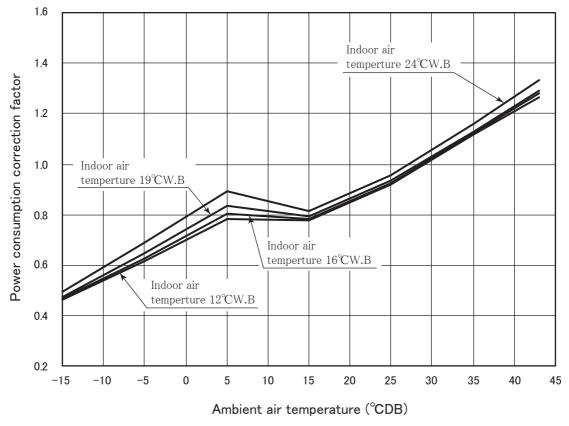


Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption. c) Models 100,125

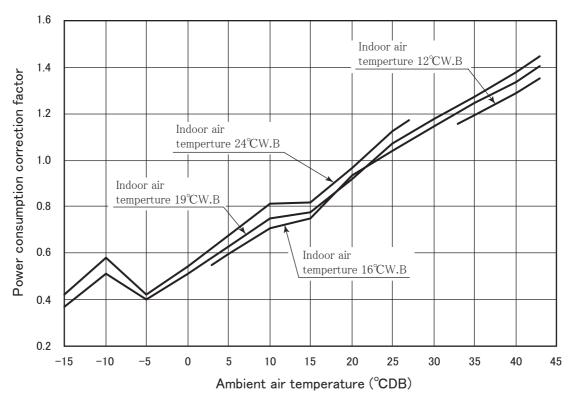


Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

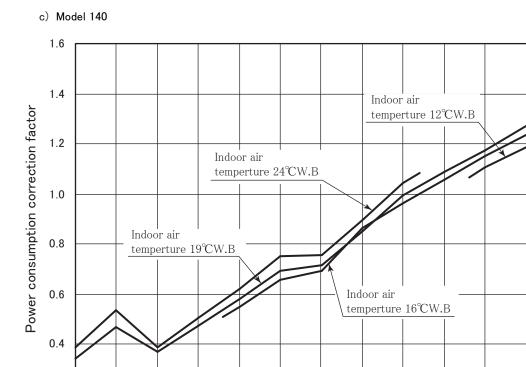




Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

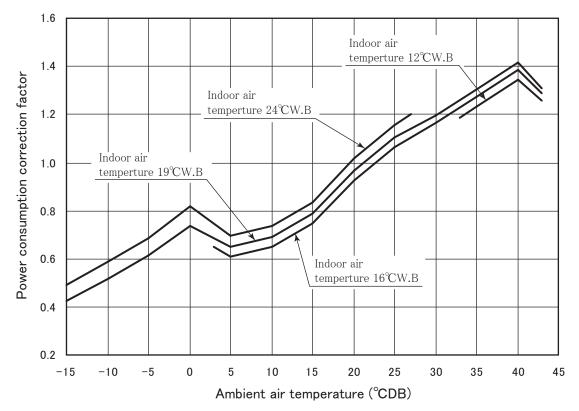


d) Models 200,250



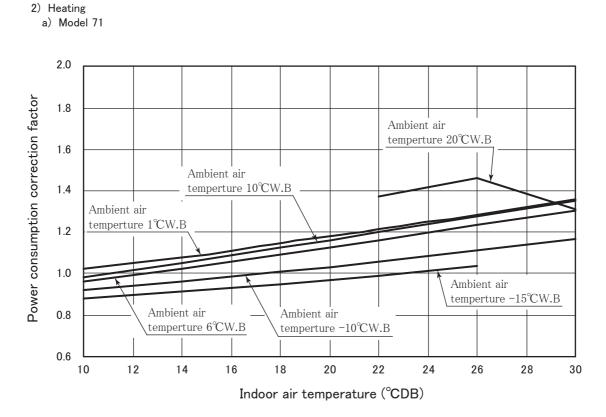


Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

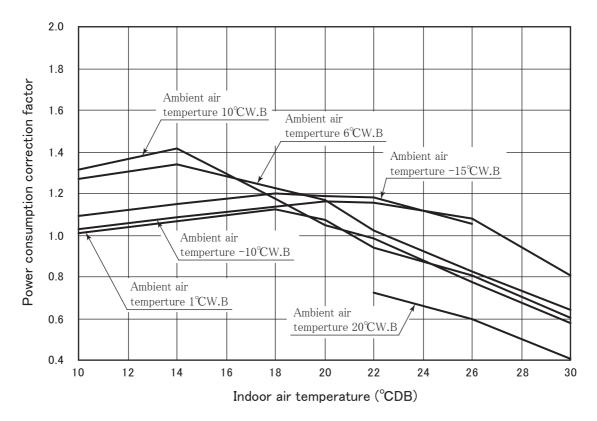


b) Models 100,125

Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.



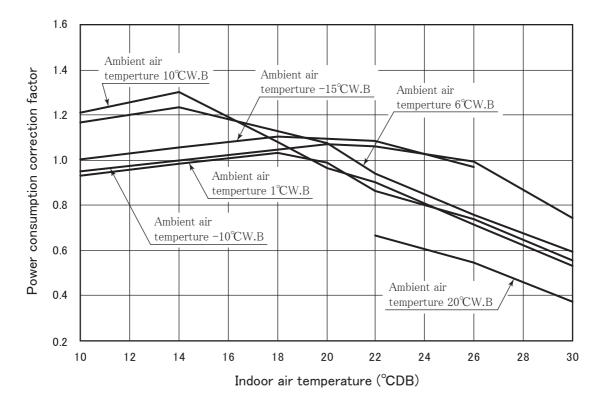

Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.

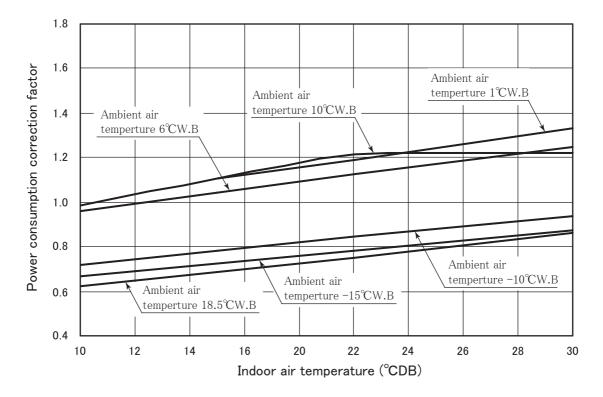


d) Models 200,250

Note 1) Above figure shows the compensation coefficient for the rated power consumption at the maximum power consumption.


(c) Sensible heat factor (Reference)

1) Cooling

a) Model 71

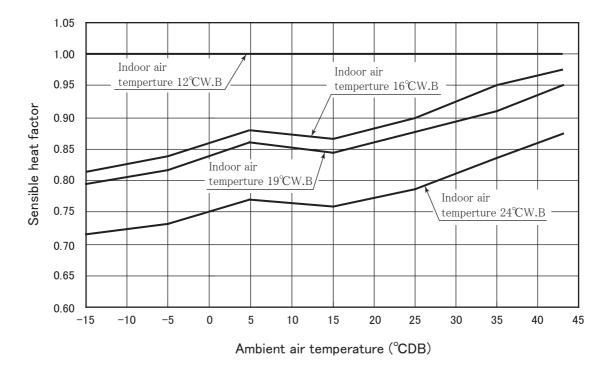


Note 1) Above figure shows the sensible heat factor at the maximum capacity.

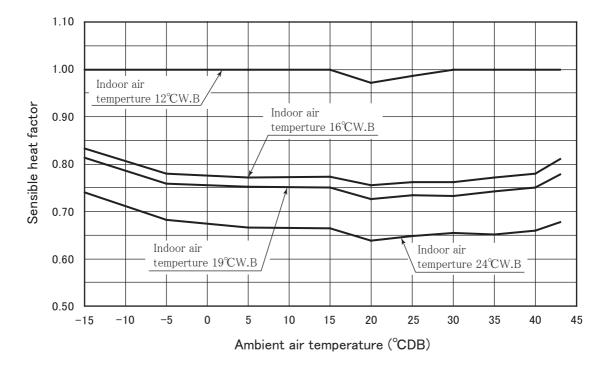

b) Models 100~140

Note 1) Above figure shows the sensible heat factor at the maximum capacity.

c) Models 200,250

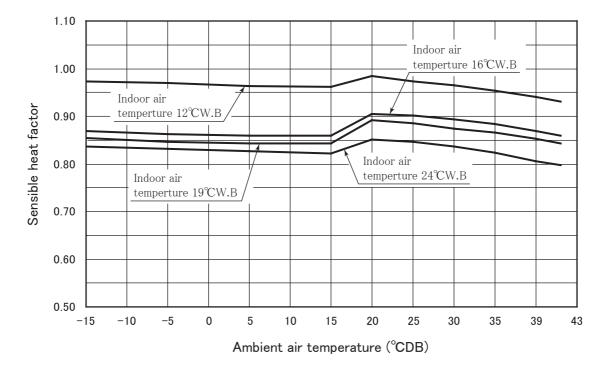

Note 1) Above figure shows the sensible heat factor at the maximum capacity.

(3) Correction of cooling and heating capacity in relation to air flow rate control (fan speed) Coefficient: 1.00 at High, 0.97 at Middle, 0.95 at Low

(4) Correction of cooling and heating capacity in relation to one way length of refrigerant piping

It is necessary to correct the cooling and heating capacity in relation to the one way equivalent piping length between the indoor and outdoor units.

(i) Models 40~60

Equivalent piping length ⁽¹⁾ m		7.5	10	15	20	25	30	35	40	45	50	55
Heating		1	0.995	0.992	0.990	0.987	0.984	0.981	0.978	0.975	0.972	0.970
	40 model	1	0.997	0.991	0.985	0.980	0.974	0.968	0.962	0.956	_	_
Cooling	50 model	1	0.996	0.989	0.981	0.973	0.966	0.958	0.951	0.943	_	_
	60 model	1	0.995	0.986	0.977	0.967	0.958	0.948	0.939	0.930	_	

Note (1) Calculate the equivalent length using the following formula.

However, install the piping so that the equivalent length is within +5 m of the piping distance limit (actual length) for each respective piping system.

(ii) Models 71 ~ 140

Equivalent piping length $^{(1)}(m)$		7.5	10	15	20	25	30	35	40	45	50	55	
Heating			1	1	1	1	1	0.998	0.998	0.993	0.993	0.988	0.988
	71 model		1	0.996	0.989	0.982	0.975	0.968	0.961	0.954	0.947	0.940	0.933
	100 model	A15.00	1	0.991	0.978	0.964	0.951	0.937	0.924	0.910	0.897	0.883	0.870
	125 model	φ15.88	1	0.986	0.968	0.950	0.932	0.914	0.896	0.878	0.860	0.842	0.824
Cooling	140 model		1	0.985	0.966	0.946	0.927	0.907	0.888	0.868	0.849	0.829	0.810
Cooling	71 model		1.008	1.006	1.003	1	0.997	0.994	0.991	0.988	0.985	0.982	0.979
	100 model	410.05	1.016	1.013	1.007	1.002	0.996	0.991	0.985	0.980	0.974	0.969	0.963
	125 model	φ19.05	1.022	1.018	1.009	1.001	0.992	0.984	0.975	0.967	0.958	0.950	0.941
	140 model]	1.026	1.021	1.011	1.002	0.992	0.983	0.973	0.964	0.954	0.945	0.935

Note (1) Calculate the equivalent length using the following formula.

However, install the piping so that the piping length is within +5 m of the limit length (actual length) for the respective types.

(iii) Models 200, 250

Equivale	nt piping length ⁽¹⁾ (m)		7.5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Heating			1	0.998	0.995	0.991	0.988	0.984	0.981	0.977	0.974	0.970	0.967	0.963	0.960	0.956	0.953
	200 model	¢25.4	1	0.998	0.995	0.991	0.988	0.984	0.981	0.977	0.974	0.970	0.967	0.963	0.960	0.956	0.953
	250 model	φ23.4	1	0.996	0.990	0.984	0.978	0.972	0.966	0.960	0.954	0.948	0.942	0.936	0.930	0.924	0.918
Castina	200 model	φ22.22	0.993	0.990	0.984	0.977	0.971	0.964	0.958	-	_	_	-	-	_	-	_
Cooling	250 model		0.988	0.983	0.973	0.963	0.953	0.943	0.933	-	-	-	-	-	-	-	_
	200 model	+20.50	1.003	1.002	1	0.998	0.996	0.994	0.992	0.990	0.988	0.986	0.984	0.982	0.980	0.978	0.976
	250 model	¢28.58	1.004	1.003	0.999	0.996	0.992	0.989	0.985	0.982	0.978	0.975	0.971	0.968	0.964	0.961	0.957

Note (1) Calculate the equivalent length using the following formula.

However, install the piping so that the piping length is within +5 m of the limit length (actual length) for the respective types.

• Equivalent Length = Actual Length + (Equivalent bend length x number of bends in the piping.)

Equivalent length per bend.

Gas Pipe Diameter (mm)	φ12.7	φ15.88	φ19.05	ф22.22	ф25.4	ф28.58
Equivalent Bend Length	0.20	0.25	0.30	0.35	0.40	0.45

(5) When the outdoor unit is located below indoor units in cooling mode, or when the outdoor unit is located above indoor units in heating mode, the correction coefficient mentioned in the below table should be subtracted from the value in the above table.

Height difference between the indoor unit and outdoor unit in the vertical height difference	5m	10m	15m	20m	25m	30m
Adjustment coefficient	0.01	0.02	0.03	0.04	0.05	0.06

Piping length limitations


Item	40~60	71, 100, 125, 140	200, 250
Max. one way piping length	40m	50m	70m*
Max. vertical height difference	Outdoor uni	it is higher 30m Outdoor unit i	s lower 15m

Notes (1) Values in the table indicate the one way piping length between the indoor and outdoor units.

(2) When \$\phi22.22\$ gas pipe is applied to 200 and 250 (*mark), maximum one way length is limited to 30m.

How to obtain the cooling and heating capacity

Example : The net cooling capacity of the model FDUM100VNV with the air flow "High", the piping length of 15m, the outdoor unit located 5m lower than the indoor unit, indoor wet-bulb temperature at 19.0 °C and outdoor dry-bulb temperature 35 °C is



1.2.7 Characteristics of fan

(1) Duct connected-Middle static pressure-type (FDUM)

• External static pressure table

Unit : Pa (50Hz/60Hz) Duct specs. 1 spot Standard Square duct closing Air flow High (4) High (4) High (1) (m³/min) Stan-Stan-Stan-Model speed dard speed dard dard speed FDUM50V 14 50/40 85/90 50/45 90/90 FDUM60V 90/100 18 35/30 70/85 50/4085/100 55/50 FDUM71V 90/105 20 30/25 65/80 50/45 85/100 55/50 FDUM100V 95/105 28 50/50 80/90 60/6090/100 65/65 FDUMA125V, 140V 50/45 75/90 60/55 85/100 65/65 95/105 34

Notes (1) 1 spot closing: Round duct flange at center is removed and shield with a special panel (option).

(2) Standard: ø200 duct are installed at all blowout holes.


(3) Square duct: All round ducts are removed and replaced with special square duct flanges (option).

(4) When using the high speed setting, turn the dip switch SW9-4 on the indoor PCB to the ON position.

(When setting from the remote controller, select "Hi CEILNG 1")


How to interpret the blower characteristics table


Example : Case of FDUM60V (50Hz)




- 2-spot blowout.....
 Internal resistance increases more than the standard 3-spot blowout.Approx. 14Pa at 17m³/min
- 2 Square duct blowout......
 Internal resistance decreases more than the standard round duct (ø200 3-spot).
 3Pa at 17m³/min. (External static pressure increases in reverse.)

FDUM50V

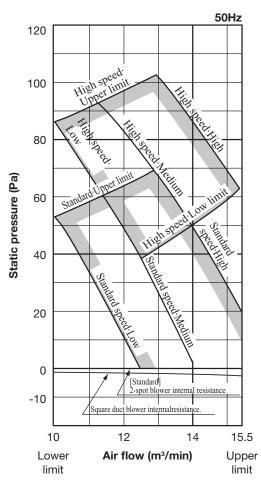


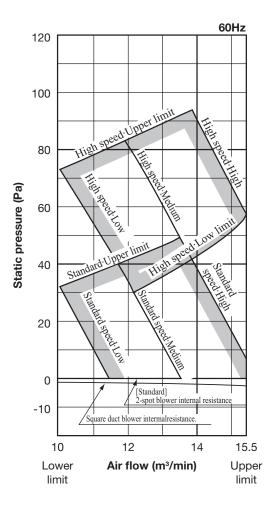


FDUM60V

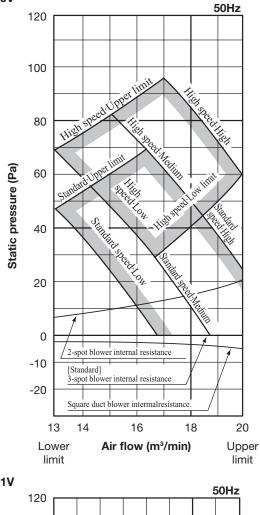




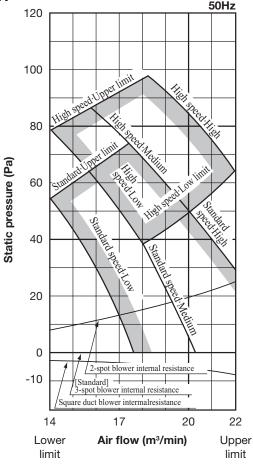


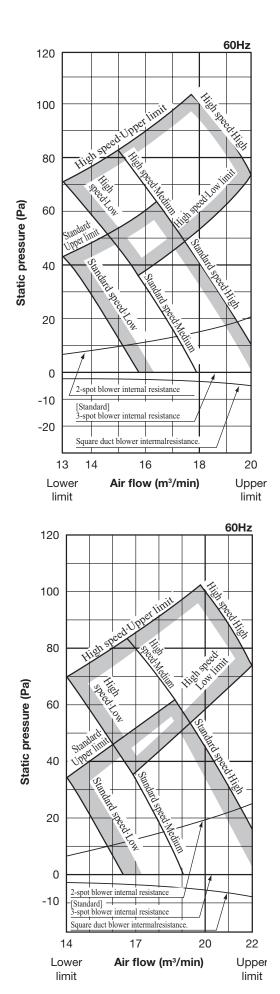



FDUM100V

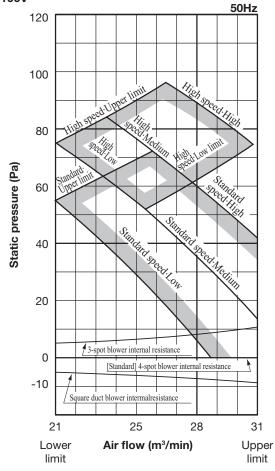



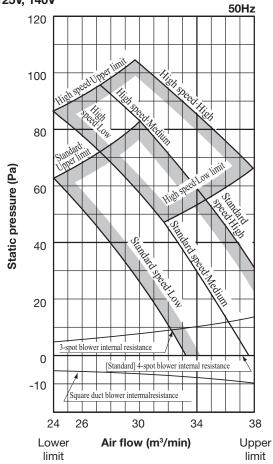

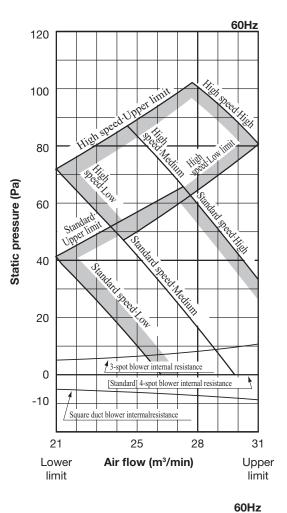

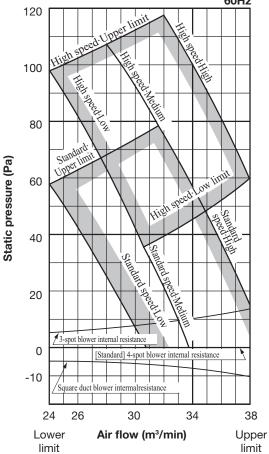



- 132 -

(2) Duct connected-High Static pressure-type (FDU)


• Air flow	Air flow range table									
	Item Air flow range (m ²									
Model		Low limit	Standard	Upper limit						
FDU71V		20	25	30						
FDU100V	V	27	34	41						
FDU125V	V, 140V	33.5	42	50						
FDU200V	V	38/45	51/60	65/66						
FDU250V	V	51/60	68/80	87/88						

Model FDU71V

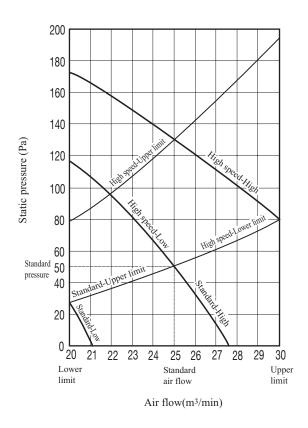

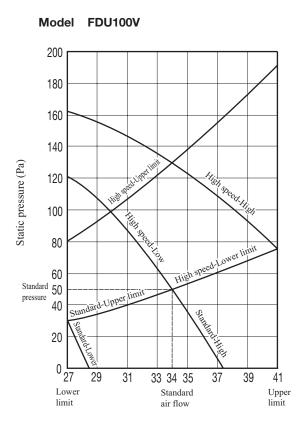


Model FDU125V, 140V

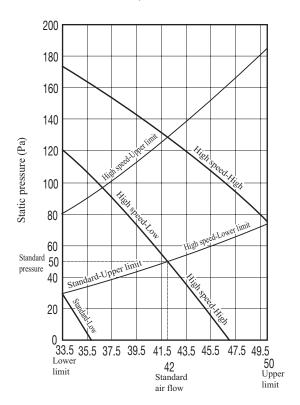

Model FDU200V


Standard (Factory Settings)


• Condition of standard rating Rated air volume: 200Pa

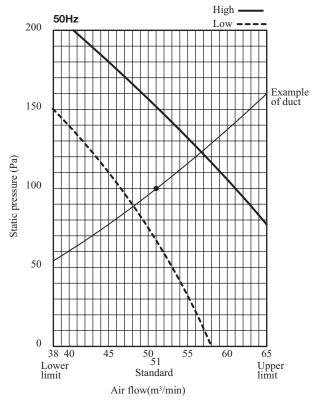



When the fan controller kit is used (Option)


• Condition of standard rating Rated air volume: 200Pa

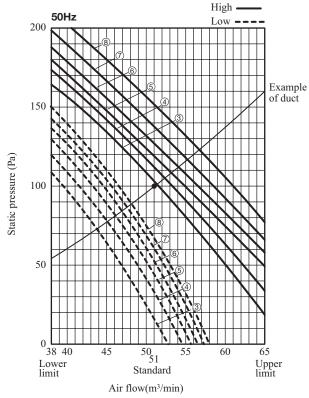



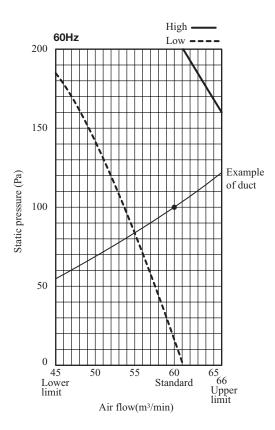

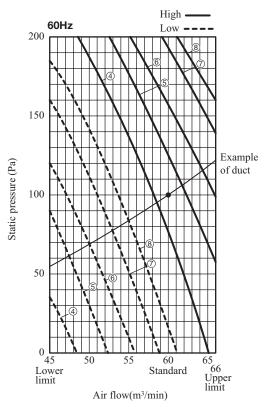




Model FDU250V


Standard (Factory Settings)


• Condition of standard rating Rated air volume: 200Pa

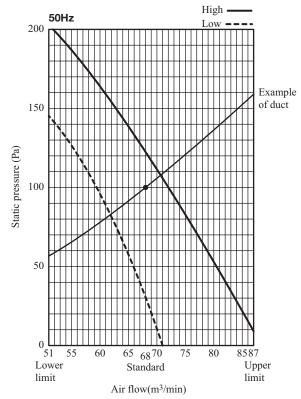



When the fan controller kit is used (Option)


• Condition of standard rating Rated air volume: 200Pa

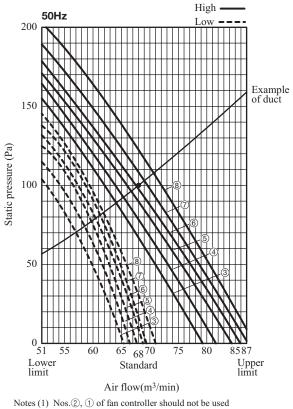



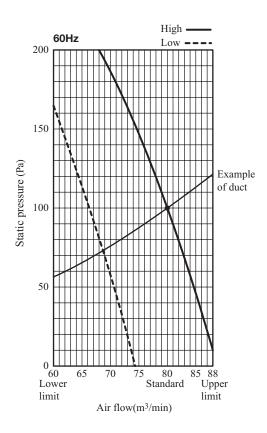

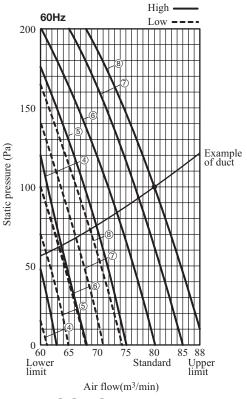



1.2.8 Noise level


Notes (1) The data are based on the following conditions.

- Ambient air temperature: Indoor unit 27°C DB, 19°C WB. Outdoor unit 35°C DB.
- (2) The data in the chart are measured in an anechoic room.
- (3) The noise levels measured in the field are usually higher than the data because of reflection.
- (4) Noise levels for the FDTC, FDT, FDEN and FDKN series show the noise level when in the Powerful mode.

(1) Indoor unit

(a) Ceiling cassette-4 way compact (600×600mm)-type (FDTC)


Models FDTC40V, 50V



(b) Ceiling cassette-4 way-type (FDT)

Measured based on JIS B 8616

Mike position as pen drawing



31 dB (A) at MEDIUM

N4(

<u>N</u>30


30 dB (A) at LOW

Measured based on JIS B 8616

Mike position as pen drawing


Model FDT40V


Noise level 33 dB (A) at HIGH 31 dB (A) at MEDIUM 30 dB (A) at LOW



Model FDT100V

Noise level 40 dB (A) at HIGH 37 dB (A) at MEDIUM 35 dB (A) at LOW








1.5m

Mike (at center & below unit)



Model FDT125V

Souud Pressure Level


(standard 0.0002bar)

40

30


20

125 250





500


Mid Octave Band Frequency (Hz)



Model FDT140V



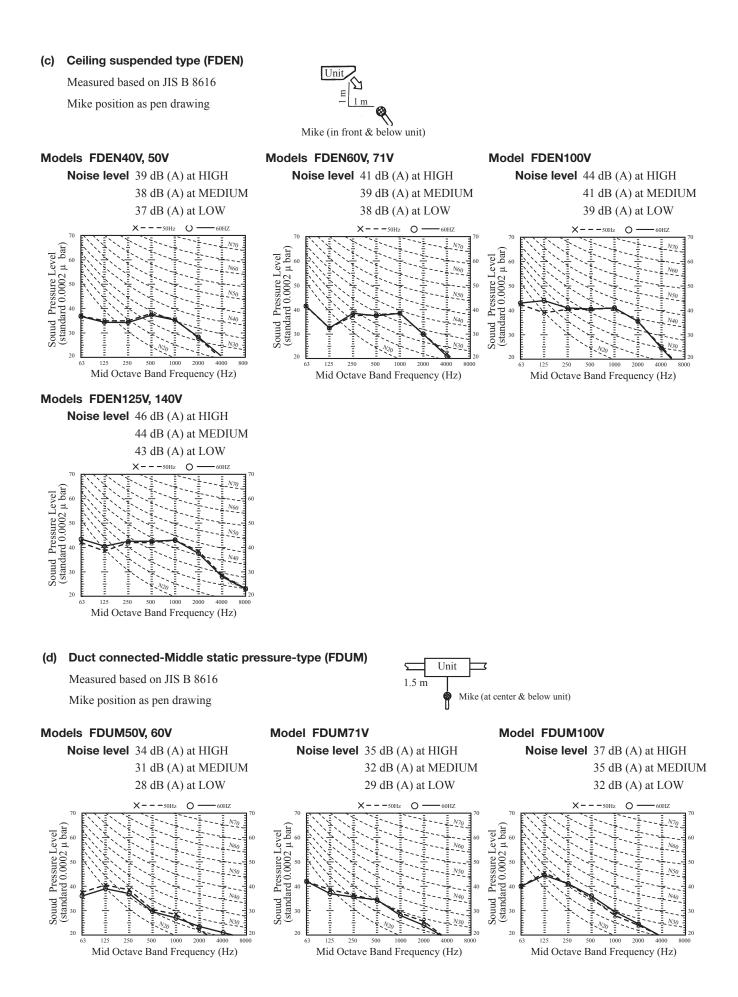

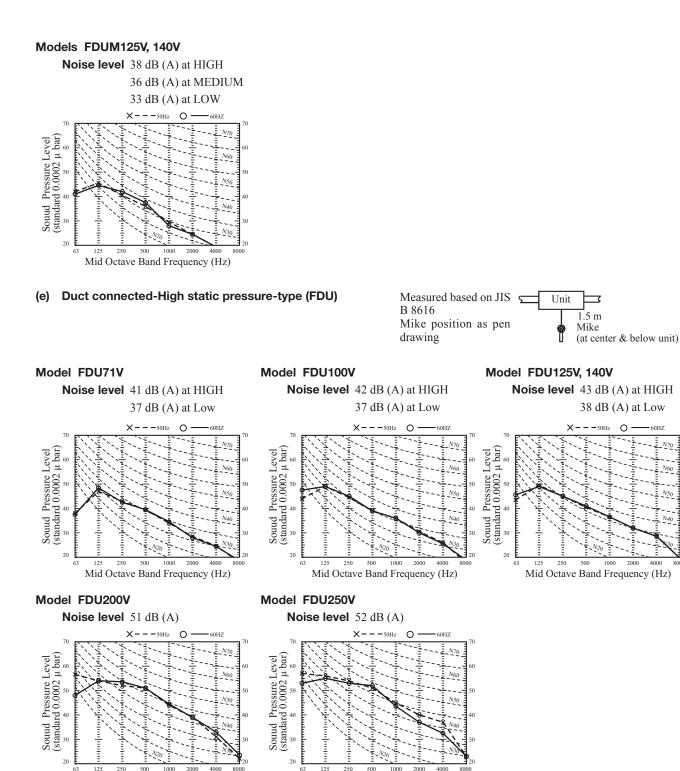

С

2000 4000

N50

125 Mid Octave Band Frequency (Hz) Mid Octave Band Frequency (Hz)

Power level

250

1000

(Measurement conditions: JIS-B8616, measurement location: reverberation chamber)

					Unit: dB
Model	Air supply side	Air return side	Model	Air supply side	Air return side
FDU71V	65	65	FDU200V	75	64
FDU100V	66	66	FDU250V	76	65
FDU125V, 140V	67	67			

Note (1) Concerning the power level, the values shown are for when the outdoor unit's External static pressure is 200 Pa. ·71~140V:50 Pa


·200, 250V:200 Pa

1000


(2) Outdoor unit


Measured based on JIS B 8616 Mike position: at highest noise level in position as mentined below Distance from front side 1m Height 1m

Models SRC40ZHX-S, 50ZHX-S





Mid Octave Band Frequency (Hz)





Model FDC200VS





Noise level 48 dB (A)

1000

Mid Octave Band Frequency (Hz)

Heating noise level 51 dB (A)

Mid Octave Band Frequency (Hz)

Cooling noise level 57 dB (A)

Model FDC71VN

Souud Pressure Level (standard 0.0002 µ bar)

standard 0.0002 µ bar)


(standard 0.0002 µ bar)


Souud Pressure Level

Model FDC250VS

Souud Pressure Level

Model SRC60ZHX-S







Mid Octave Band Frequency (Hz)

200

Model FDC140VN 140VS





1000

Mid Octave Band Frequency (Hz)


4000

ω ELECTRICAL WIRING

- Ξ Indoor unit
- Ceiling cassette-4 way compact (600×600mm)-type (FDTC)

Models All models


(a)

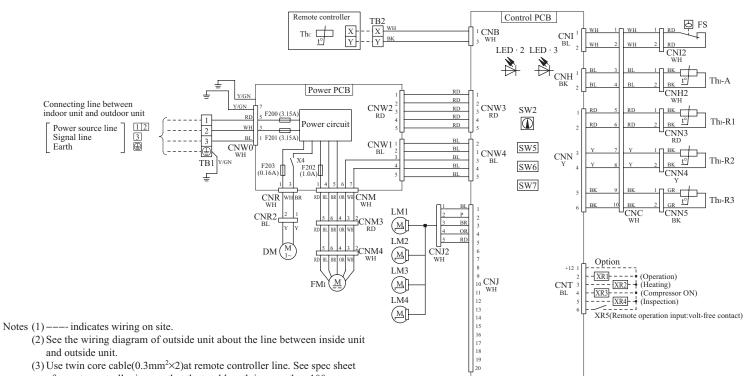

- - of remote controller in case that the total length is more than 100m.
- (4) Do not put remote controller line alongside power source line.

Meaning of	marks					Color N	Marks
Mark	Parts name	Mark	Parts name	Mark	Parts name	Mark	Co
CNB~Z	Connector	LM1~4	Louver motor	TB2	Terminal block (Signal line) (□ mark)	BK	Black
DM	Drain motor	SW2	Remote controller communication	Thc	Thermistor (Remote controller)	BL	Blue
F200~203	Fuse		address	Th -A	Thermistor (Return air)	BR	Brown
FM	Fan motor	SW5	Plural units Master/Slave setting	Th -R1,2,3	Thermistor (Heat exchanger)	GR	Gray
FS	Float switch	SW6	Model capacity setting	X4	Relay for DM	OR	Orange
LED · 2	Indication lamp	SW7-1	Operation check, Drain motor test run	mark	Closed-end connector	Р	Pink
	(Green-Normal operation)	TB1	Terminal block(Power source)			RD	Red
LED · 3	Indication lamp(Red-Inspection)		$(\Box mark)$			WH	White
				-		Y	Yellow

COIOLIN	laiks
Mark	Color
BK	Black
BL	Blue
BR	Brown
GR	Gray
OR	Orange
Р	Pink
RD	Red
WH	White
Y	Yellow
Y/GN	Yellow/Green

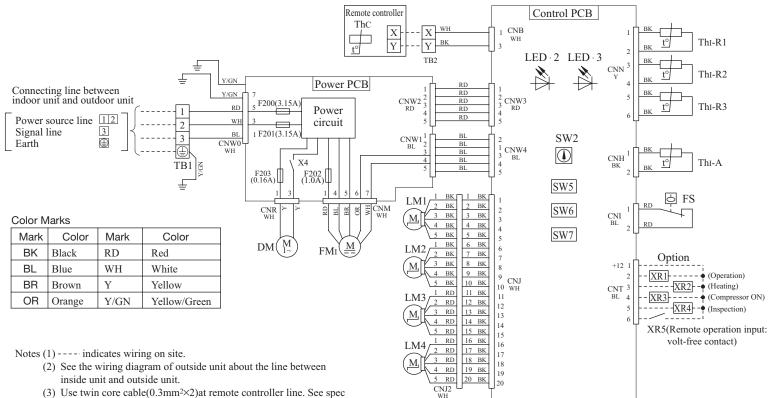


1

(3) Use twin core cable(0.3mm²×2)at remote controller line. See spec sheet of remote controller in case that the total length is more than 100m.

(4) Do not put remote controller line alongside power source line.

Meaning of marks

Mark	Parts name	Mark	Parts name	Mark	Parts name
CNB~Z	Connector	LM1~4	Louver motor	TB2	Terminal block (Signal line) (□ mark)
DM	Drain motor	SW2	Remote controller communication	Thc	Thermistor (Remote controller)
F200~203	Fuse		address	Thi-A	Thermistor (Return air)
FMi	Fan motor	SW5	Plural units Master/Slave setting	Thi-R1, 2, 3	Thermistor (Heat exchanger)
FS	Float switch	SW6	Model capacity setting	X4	Relay for DM
LED · 2	Indication lamp (Green-Normal operation)	SW7-1	Operation check, Drain motor test run	mark	Closed-end connector
LED · 3	Indication lamp (Red-Inspection)	TB1	Terminal block (Power source) (mark)		

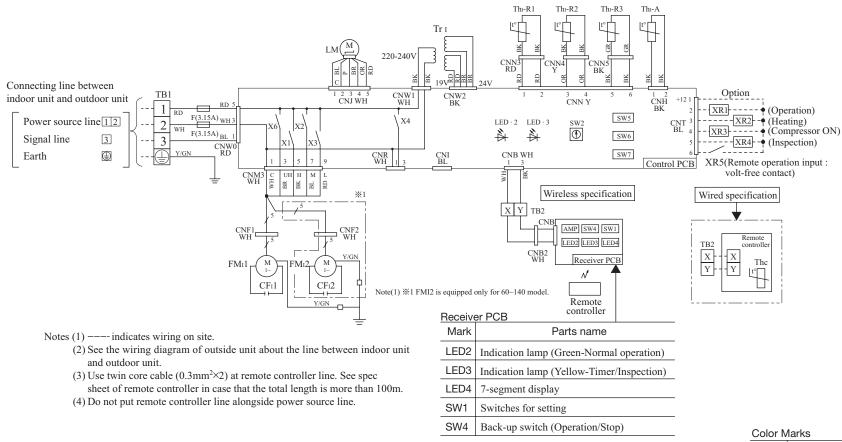


1

_		lains
	Mark	Color
	BK	Black
ne	BL	Blue
air)	BR	Brown
changer)	GR	Gray
	OR	Orange
	Р	Pink
	RD	Red
	WH	White
or	Y	Yellow
	Y/GN	Yellow/Green

Meaning of marks

Mark	Parts name	Mark	Parts name	Mark	Parts name
CFI1, 2	Capacitor for FMI	SW2	Remote controller communication address	ThI-A	Thermistor (Return air)
CNB~Z	Connector	SW5	Plural units Master/Slave setting	Thl-R1, 2, 3	Thermistor (Heat exchange
F	Fuse	SW6	Model capacity setting	Trl	Transformer
FM:1, 2	Fan motor (with thermostat)	SW7-1	Operation check, Drain motor test run	X1~3, 6	Relay for FM
LED · 2	Indication lamp (Green-Normal operation)	TB1	Terminal block (Power source) (□ mark)	X4	Relay for DM
LED · 3	Indication lamp (Red-Inspection)	TB2	Terminal block (Signal line) mark)	mark	Closed-end connector
LM	Louver motor	Thc	Thermistor (Remote controller)		

Models All models

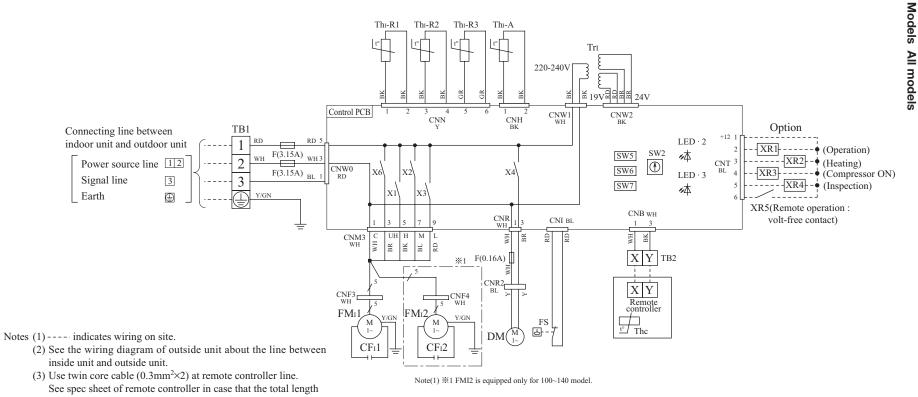

I


143

- inside unit and outside unit.
- See spec sheet of remote controller in case that the total length is more than 100m.
- (4) Do not put remote controller line alongside power source line.

Meaning of	mark					Color M	arks
Mark	Parts name	Mark	Parts name	Mark	Parts name	Mark	Color
CFI1, 2	Capacitor for FMI	SW2	Remote controller communication address	Thi-R1, 2, 3	Thermistor (Heat exchanger)	BK BL	Black Blue
CNB~Z	Connector	SW5	Plural units Master/Slave setting	Trı	Transformer	BR	Brown
DM	Drain motor	SW6	Model capacity setting	X1~3,6	Relay for FM	GR RD	Gray Red
F	Fuse	SW7-1	Operation check, Drain motor test run	X4	Relay for DM	WH	White
FMI1, 2	Fan motor (with thermostat)	TB1	Terminal block (Power source) (□ mark)	■ mark	Closed-end connector	Y Y/GN	Yellow Yellow/Green
FS	Float switch	TB2	Terminal block (Signal line) (mark)			T/GIN	Tellow/Gleen
LED · 2	Indication lamp (Green-Normal operation)	Thc	Thermistor (Remote controller)				
LED · 3	Indication lamp (Red-Inspection)	Thi-A	Thermistor (Return air)				


Meaning of mark

đ

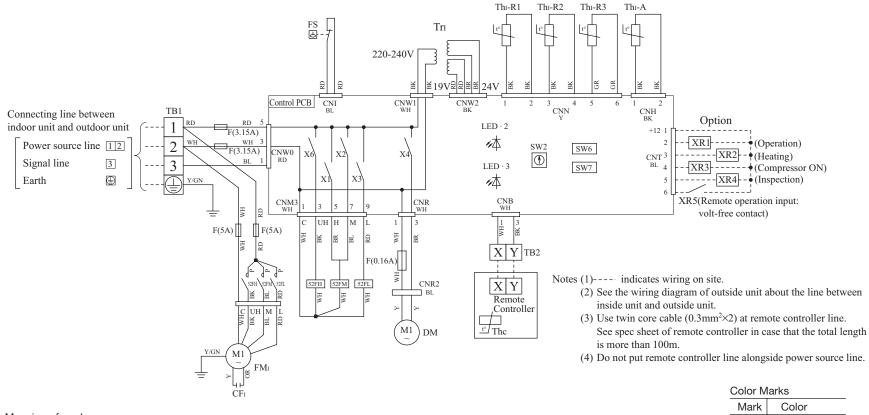

N.4	e forma and an					- main	00101
Meaning of						BK	Black
Mark	Parts name	Mark	Parts name	Mark	Parts name	BL	Blue
CFI	Capacitor for FMI	LED · 3	Indication lamp (Red-Inspection)	ThI-A	Thermistor (Return air)	BR	Brown
CNB~Z	Connector	SW2	Remote controller communication address	ThI-R1,2,3	Thermistor (Heat exchanger)	GR	Gray
DM	Drain motor	SW6	Model capacity setting	TrI	Transformer	OR	Orange
F	Fuse	SW7-1	Operation check, Drain motor test run	X1~3, 6	Relay for FM	Р	Pink
FM	Fan motor (with thermostat)	TB1	Terminal block (Power source) (□ mark)	X4	Relay for DM	RD	Red
	ran motor (with thermostat)					WH	White
FS	Float switch	TB2	Terminal block (Signal line) (mark)	mark	Closed-end connector	Y	Yellow
$LED \cdot 2$	Indication lamp (Green-Normal operation)	Thc	Thermistor (Remote controller)	52FL, FM, FH	Electromagnetic contactor for FMI	Y/GN	Yellow/Green

1

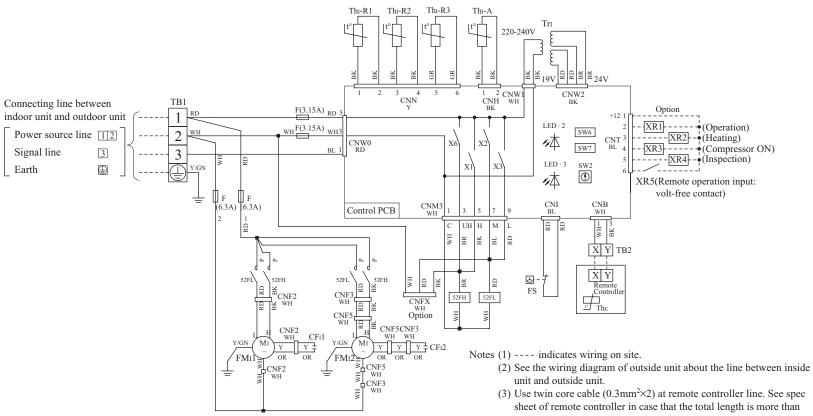

- sheet of remote controller in case that the total length is more than 100m.

Color Marks


(4) Do not put remote controller line alongside power source line.

	<i>c</i>					Mark	Color
Meaning						BK	Black
Mark	Parts name	Mark	Parts name	Mark	Parts name	BL	Blue
CFI1, 2	Capacitor for FMI	LED · 3	Indication lamp (Red-Inspection)	ThI-A	Thermistor (Return air)	BR	Brown
CNB~Z	Connector	SW2	Remote controller communication address	Thl-R1, 2, 3	Thermistor (Heat exchanger)	GR	Gray
F	Fuse	SW6	Model capacity setting	Trl	Transformer	OR	Orange
FC	Fan controller	SW7-1	Operation check, Drain motor test run	X1~3,6	Relay for FM	Р	Pink
FMI1.2	Fan motor (with thermostat)	TB1		■ mark	Closed-end connector	RD	Red
FIVILI, Z	ran motor (with thermostat)	ы	Terminal block (Power source) (\Box mark)		Closed-end connector	WH	White
FS	Float switch	TB2	Terminal block (Signal line) (□ mark)	52FL,FH	Electromagnetic contactor for FMI	Y	Yellow
$\text{LED}\cdot 2$	Indication lamp (Green-Normal operation)	Thc	Thermistor (Remote controller)			Y/GN	Yellow/Green

Power source

1 Phase

220-240V 50Hz/220V 60Hz

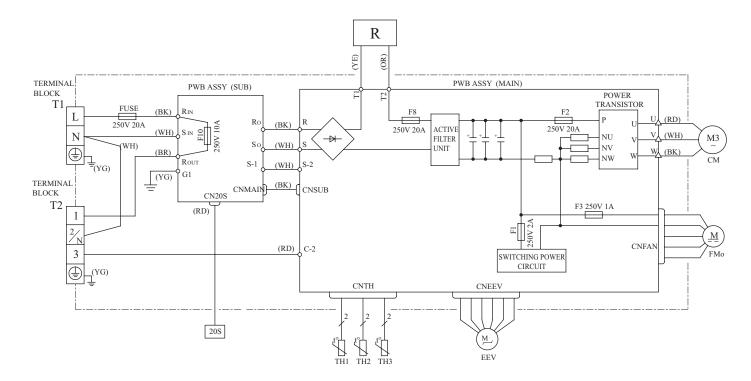

(2) Outdoor unit Models SRC40ZHX-S, 50ZHX-S, 60ZHX-S


Meaning	g of marks	Colo
Mark	Parts name	Mar
CM	Compressor motor	BK
EEV	Electric expansion valve (coil)	RD
FMo	Fan motor	WH
R	Reactor	OR
TH1	Thermistor (heat exchanger)	BR
TH2	Thermistor (ambient air temp.)	YE
TH3	Thermistor (discharge temp.)	Y/G
20S	4 way valve (coil)	

Color marks						
Mark	Color					
BK	Black					
RD	Red					
WH	White					
OR	Orange					
BR	Brown					
YE	Yellow					
VIC	V-11/C					

Y/G Yellow/Green

Power source


1~220-240V 50Hz/1~220V 60Hz

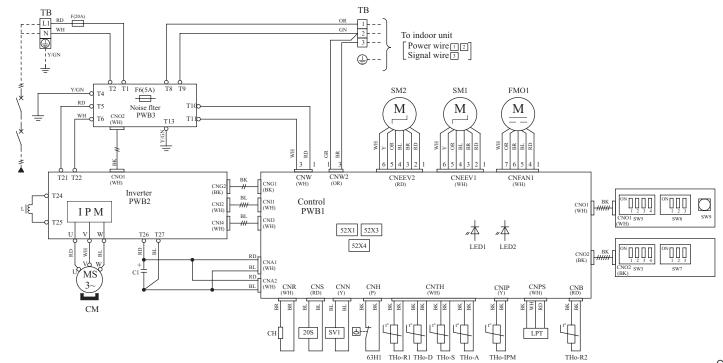

Meaning of r	marks		05111 1110-11110-	D 1110-5 1110-7 111	1110-122	Color mar	ks
Mark	Parts mame	Mark	Parts mame	Mark	Parts mame	Mark	Color
CnA~Z	Connector	LPT	Low pressure sensor	THo-IPM	Thermistor (IPM)	BK	Black
СН	Crankcase heater	SM1	Expansion valve for cooling	THo-R1. 2	Thermistor (Heat exchanger pipe temp.)	BL	Blue
CM	Compressor motor	SM2	Expansion valve for heating	THo-S	Thermistor (Suction pipe temp.)	BR	Brown
F	Fuse	SV1	Solenoid valve	20S	Solenoid valve for 4 way valve	GR	Gray
FM01	Fan motor	SW9	Pump down switch	52X1	Auxilliary relay (for CH)	Р	Pink
IPM	Intelligent power module	SW3, 5, 7, 8	Local setting switch	52X3	Auxilliary relay (for 208)	OR	Orange
L	Reactor	тв	Terminal block	52X4	Auxilliary relay (for SV1)	RD	Red
LED1	Indication lamp (GREEN)	THo-A	Thermistor (Ambient air temp.)	63H1	High pressure switch	WH	White
LED2	Indication lamp (RED)	THo-D	Thermistor (Discharge pipe temp.)		S r	Y	Yellow
	r r r		STITE TO			Y/GN	Yellow/Green

Power source


1~220-240V 50Hz/1~220V 60Hz

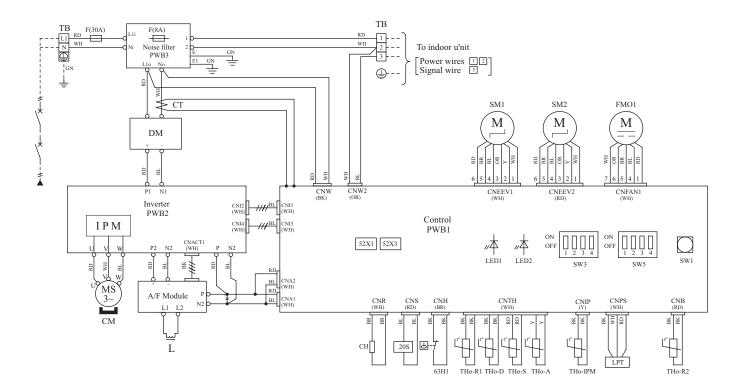


Meaning of n	narks					Color mar	ks
Marks	Parts name	Mark	Parts mame	Mark	Parts mame	Mark	Color
CnA~Z	Connector	LED1	Indication lamp (GREEN)	THo-D	Thermistor (Discharge pipe temp.)	BK	Black
СН	Crankcase heater	LED2	Indication lamp (RED)	THo-IPM	Thermistor (IPM)	BL	Blue
СМ	Compressor motor	LPT	Low pressure sensor	THo-R1, 2	Thermistor (Heat exchanger pipe temp.)	BR	Brown
СТ	Current sensor	SM1	Expansion valve for cooling	THo-S	Thermistor (Suction pipe temp.)	GN	Green
DM	Diode module	SM2	Expansion valve for heating	20S	Solenoid valve for 4 way valve	GR	Gray
F	Fuse	SW1	Pump down switch	52X1	Auxilliary relay (for CH)	Р	Pink
FM01	Fan motor	SW3, 5	Local setting switch	52X3	Auxilliary relay (for 20S)	OR	Orange
IPM	Intelligent power module	ТВ	Terminal block	63H1	High pressure switch	RD	Red
L	Reactor	THo-A	Thermistor (Ambient air temp.)			WH	White
						Y	Yellow

Y/GN

Yellow/Green




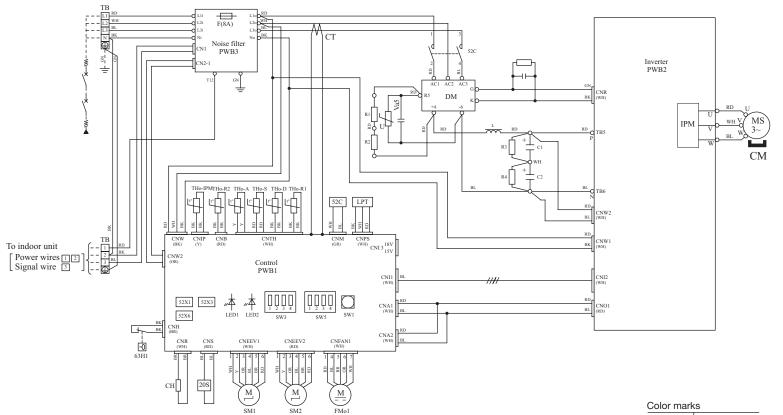


- I

- 149 –

Meaning of n	narks					Mark	Color
Mark	Parts name	Mark	Parts name	Mark	Parts name	BK	Black
CnA~Z	Connector	LED1	Indication lamp (GREEN)	THo-D	Thermistor (Discharger pipe temp.)	BL	Blue
СН	Crankcase heater	LED2	Indication lamp (RED)	THo-IPM	Thermistor (IPM)	BR	Brown
CM	Compressor motor	LPT	Low pressure sensor	THo-R1, 2	Thermistor (Heat exchanger pipe temp.)	GR	Gray
СТ	Current sensor	SM1	Expansion valve for cooling	THo-S	Thermistor (Suction pipe temp.)	Р	Pink
DM	Diode module	SM2	Expansion valve for heating	20S	Solenoid valve for 4 way valve	OR	Orange
F	Fuse	SW1	Pump down switch	52X1	Auxilliary relay (for CH)	RD	Red
FM01	Fan motor	SW3, 5	Local setting switch	52X3	Auxilliary relay (for 20S)	WH	White
IPM	Intelligent power module	тв	Terminal block	52X6	Auxilliary relay (for 52C)	Y	Yellow
L	Reactor	THo-A	Thermistor (Ambient air temp.)	63H1	High pressure switch	Y/GN	Yellow/Green



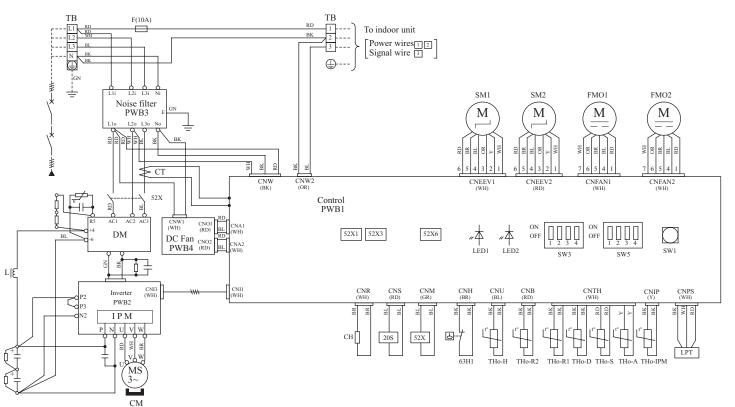

Meaning of m	Meaning of marks						ks
Mark	Parts name	Mark	Parts name	Mark	Parts name	Mark	Color
CnA~Z	Connector	LED2	Indication lamp (RED)	THo-IPM	Thermistor (IPM)	BK	Black
CH	Crankcase heater	LPT	Low pressure sensor	THo-R1, 2	Thermistor (Heat exchanger pipe temp.)	BL	Blue
CM	Compressor motor	SM1	Expansion valve for cooling	THo-S	Thermistor (Suction pipe temp.)	BR	Brown
CT	Current sensor	SM2	Expansion valve for heating	20S	Solenoid valve for 4 way valve	GR	Gray
DM	Diode module	SW1	Pump down switch	52X1	Auxilliary relay (for CH)	Р	Pink
F	Fuse	SW3,5	Local setting switch	52X3	Auxilliary relay (for 20S)	OR	Orange
FM01, 02	Fan motor	тв	Terminal block	52X6	Auxilliary relay (for 52X)	RD	Red
IPM	Intelligent power module	THo-A	Thermistor (Ambient air temp.)	63H1	High pressure switch	WH	White
L	Reactor	THo-D	Thermistor (Discharge pipe temp.)			Y	Yellow
LED1	Indication lamp (GREEN)	THo-H	Thermistor (Comp. undeneth temp.)			Y/GN	Yellow/Green

1.4 OUTLINE OF OPERATION CONTROL BY MICROCOMPUTER


(1) Remote controller

(a) Wired remote controller

The figure below shows the remote controller with the cover opened. Note that all the items that may be displayed in the liquid crystal display area are shown in the figure for the sake of explanation.


Characters displayed with dots in the liquid crystal display area are abbreviated.

The figure below shows the remote control with the cover opened.

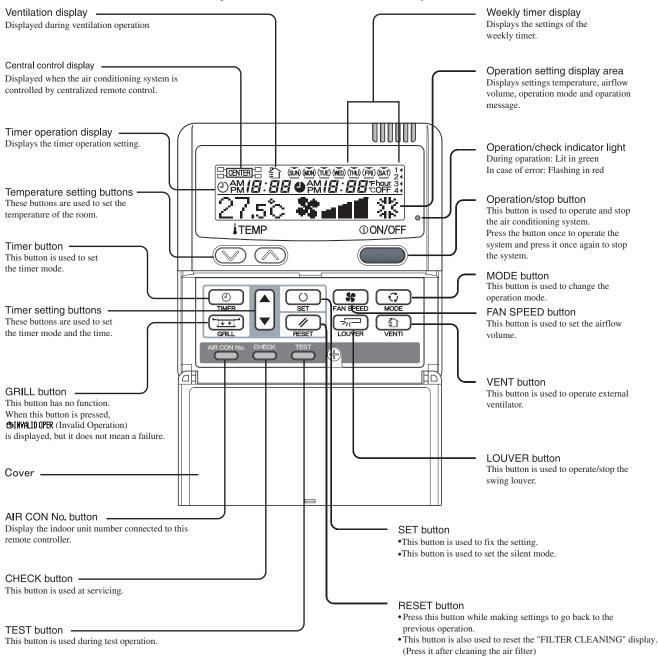

* All displays are described in the liguid crystal display for explanation.

(b) Wireless remote controller

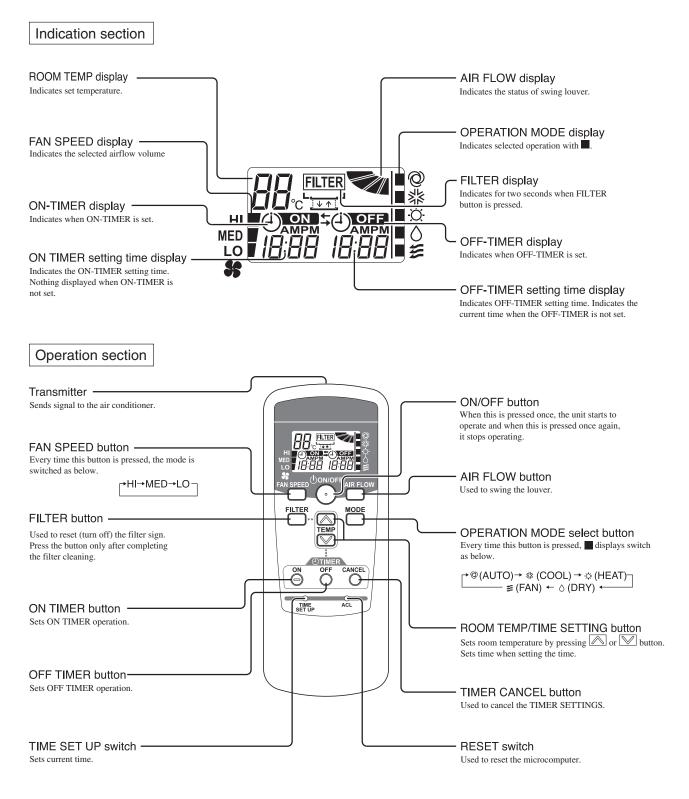


* All displays are described in the liquid crystal display for explanation

(2) Operation control function by the indoor controller

Auto operation [Applicable model: All models of the cooling and heating type] (a)


If "Auto" mode is selected by the remote controller, the heating and the cooling are automatically switched according to the difference between outdoor air temperature and setting temperature and the difference between setting temperature and return air temperature. (When the switching of cooling mode \leftrightarrow heating mode takes place within 3 minutes, the compressor does not operate for 3 minutes by the control of 3-minute timer.) This will facilitate the cooling/heating switching operation in intermediate seasons and the adaptation to unmanned operation at stores, etc (ATM corner of bank).



Room temperature (detected with ThI-A) [deg]

Note (1) Room temperature control during auto cooling/auto heating is performed according to the room temperature setting temperature. (DIFF: ±1 deg) (2) If the indoor unit heat exchanger temperature rises to 59°C or higher

during heating operation, it is switched automatically to cooling operation. In addition, for 1 hour after this switching, the heating operation is not performed, regardless of the temperature shown at right.



Indoor unit heat exchanger temp. (°C)

Operations of functional items during cooling/heating [Applicable model: All models] (b)

Operation	Coc	oling			Heating		
Functional item	Thermostat ON	Thermostat OFF	Fan	Thermostat ON	Thermostat OFF	Hot start (Defrost)	Dehumidify
Compressor	0	×	×	0	×	0	O/X
4-way valve	×	×	×	0	0	$O(\times)$	×
Outdoor unit fan	0	×	×	0	×	$O(\times)$	O/×
Indoor unit fan	0	0	0	O/×	O/×	O/×	O/×
Louver motor		O/×		O/×	O/x	O/×	O/×
Drain pump ⁽³⁾	0	× ⁽²⁾	\times ⁽²⁾		$O/\times^{(2)}$		Thermostat ON: O Thermostat OFF: X ⁽²⁾

Note (1) \bigcirc : Operation \times : Stop \bigcirc/\times : Turned ON/OFF by the control other than the room temperature control.

(2) ON during the drain motor delay control.

(3) Drain pump ON setting may be selected with the indoor unit function setting of the wired remote controller. Refer to page 233 for details.

Dehumidifying operation (c)

1) When the humidity sensor is not provided (Models other than FDT Series)

Return air temperature thermistor [Thi-A (by the remote controller when the remote controller thermistor is enabled)] controls the indoor temperature environment simultaneously.

- Operation is started in the cooling mode. When the difference between the return air temperature and the setting a) temperature is 2°C or less, the indoor unit fan tap is brought down by one tap. That tap is retained for 3 minutes after changing the indoor unit fan tap.
- If the return air temperature exceeds the setting temperature by 3°C during defrosting operation, the indoor unit fan b) tap is raised. That tap is retained for 3 minutes after changing the indoor unit fan tap.
- If the thermostat OFF is established during the above control, the indoor unit fan tap at the thermostat ON is retained c) so far as the thermostat is turned OFF.
- After stopping the cooling operation, the indoor unit continues to run at Lo for 15 seconds. d)
- 2) When the humidity thermistor is provided (FDT Series only) [Optional]
 - Operation starts in the cooling mode, and the target relative temperature is determined based on the setting a) temperature. If the humidity detected by the humidity thermistor becomes lower than the target relative temperature, the indoor unit fan tap is retained.
 - Anything other than a) above is same as the item 1) above. b)

(d) Timer operation [Applicable model: All models]

1) Timer

Set the duration of time from the present to the time to turn off the air-conditioner.

It can be selected from 10 steps in the range from "OFF 1 hour later" to "OFF 10 hours later". After the clock timer setting, the remaining time is displayed with progress of time in the unit of hour.

2) OFF timer

Time to turn OFF the air-conditioner can be set in the unit of 10 minutes.

3) ON timer

Time to turn ON the air-conditioner can be set. Indoor temperature can be set simultaneously.

4) Weekly timer

Timer operation (ON timer, OFF timer) can be set up to 4 times a day for each weekday.


5) Timer operations which can be set in combination

Item	Timer	OFF timer	ON timer	Weekly timer
Timer		×	0	×
OFF timer	×		0	×
ON timer	0	0		×
Weekly timer	×	×	×	

Note (1) \bigcirc : Allowed \times : Not

(e) Remote controller display during the operation stop

- 1) "Centralized control ON" is displayed always on the LCD under the "Center/Remote" and "Center" modes during the operation stop (Power ON). This is not displayed under the "Remote" mode.
- 2) If this display is not shown under the "Center/Remote" mode, check if the indoor unit power switch is turned on or not.
- (f) Hot start (Cold draft prevention at heating) [Applicable model: All models of the heating and cooling type] At the startup of heating operation, at resetting of the thermostat, during defrost operation and at returning to heating, the indoor fan is controlled by the indoor heat exchanger temperature (detected with Thi-R) for preventing the cold draft.

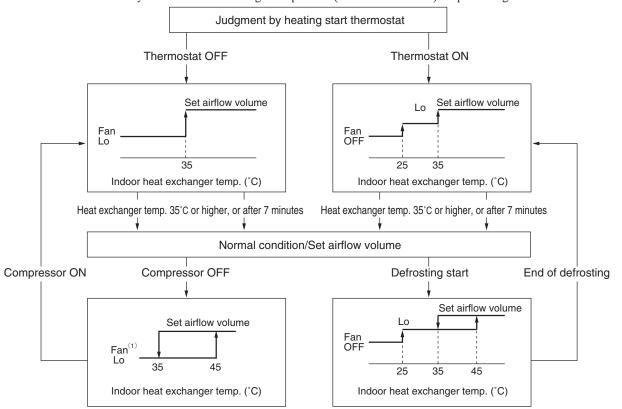

Note (1) Heating preparation is displayed during the hot start (when the compressor is operating and the indoor fan does not provide the set airflow volume).

(g) Hot keep [Applicable model: All models of the heating and cooling type]

Hot keep control is performed at the start of the defrost control.

- 1) Control
 - a) When the indoor heat exchanger temperature (detected with Thi-R1 or R2) drops to 35°C or lower, the speed of indoor fan is changed to the lower tap at each setting.
 - b) During the hot keep, the louver horizontal control signal is transmitted.
- Ending condition
 When the indoor fan is at the lower tap at each setting, it returns to the set airflow volume as the indoor heat exchanger temperature rises to 45°C or higher.
- (h) Fan control during the heating thermostat OFF [Applicable model: All models of the heating and cooling type] When the heating thermostat is turned OFF, the setting of the fan control is selectable using the indoor function of wired remote controller [☆ FAN CONTROL].

1) Soft wind (Factory default)

If the indoor heat exchanger temperature drops below 35°C with the heating thermostat OFF, the indoor fan operate at the lower speed tap at each setting.

2) Set airflow volume

Even if the indoor heat exchanger temperature drops below 35°C with the heating thermostat OFF, the indoor fan continues to run at the set airflow volume.

3) Intermittent

If the indoor heat exchanger temperature drops below 35° C with the heating thermostat OFF, the indoor fan operates at the lower speed tap at each setting and, when the indoor heater exchanger temperature drops below 25° C, the indoor fan stops for 5 minutes. Then the fan runs at the low speed tap for 2 minutes, and the judgment is made by the thermostat.

4) Stop

If the indoor heat exchanger temperature drops below 35°C with the heating thermostat OFF, the indoor fan is turned OFF. The same applies also when the remote controller sensor is effective.

(i) Filter sign [Applicable model: All models]

As the operation time (Total ON time of ON/OFF switch) accumulates to 180 hours (1), "Filter cleaning" is displayed on the remote controller. (This is displayed when the unit is in trouble and under the centralized control, regardless of ON/OFF)

Note (1) Time setting for the filter sign can be made as shown below using the indoor function of wired remote controller "FILTER SIGN SET". (It is set at 1 at the shipping from factory.)

Filter sign setting	Function
Setting 1	Setting time: 180 hrs (Factory default)
Setting 2	Setting time: 600 hrs
Setting 3	Setting time: 1,000 hrs
Setting 4	Setting time: 1,000 hrs (Unit stop) ⁽²⁾

(2) After the setting time has elapsed, the "FILTER CLEANING" is displayed and, after operating for 24 hours further (counted also during the stop), the unit stops.

(j) Auto swing control [Applicable model: FDTC, FDT and FDEN]

- 1) Louver control
 - a) Press the "LOUVER" button to operate the swing louver when the air conditioner is operating.
 - "AUTO =" is displayed for 3 seconds and then the swing louver moves up and down continuously."
 - b) To fix the swing louver at a position, press one time the "LOUVER" button while the swing louver is moving so that four stop positions are displayed one after another per second.
 When a desired stop position is displayed, press the "LOUVER" button again. The display stops, changes to show the "STOP 1 " for 5 seconds and then the swing louver stops.
 - c) Louver operation at the power on with a unit having the louver 4-position control function

The louver swings one time automatically (without operating the remote controller) at the power on.

This allows inputting the louver motor (LM) position, which is necessary for the microcomputer to recognize the louver position.

2) Automatic louver level setting during heating

At the hot start with the heating thermostat OFF, regardless whether the auto swing switch is operated or not (auto swing or louver stop), the louver takes the level position (In order to prevent the cold start). The louver position display LCD continues to show the display which has been shown before entering this control.

3) Louver-free stop control

When the louver-free stop has been selected with the indoor function of wired remote controller "= POSITION", the louver motor stops when it receives the stop signal from the remote controller. If the auto swing signal is received from the remote controller, the auto swing will start from the position where it was before the stop.

Note (1) When the indoor function of wired remote controller "Louver control setting" has been switched, switch also the remote control function " $\frac{1}{2}$ " POSITION" in the same way.

(k) Compressor inching prevention control [Applicable model: All models]

1) 3-minute timer

When the compressor has been stopped by the thermostat, remote controller operation switch or anomalous condition, its restart will be inhibited for 3 minutes. However, the 3-minute timer is invalidated at the power on the electric power source for the unit.

- 2) 3-minute forced operation timer
 - Compressor will not stop for 3 minutes after the compressor ON. However, it stops immediately when the unit is stopped by means of the ON/OFF switch or by when the thermister turned OFF the change of operation mode.
 - If the thermostat is turned OFF during the forced operation control of heating compressor, the louver position (with the auto swing) is returned to the level position.

Note (1) The compressor stops when it has entered the protective control.

(I) Drain motor (DM) control [Applicable model: FDTC and FDT]

1) Drain motor (DM) is operated during the cooling or dehumidifying mode operations and simultaneously with the compressor ON. The DM continues to operate for 5 minutes after the operation stop, anomalous stop, thermostat stop or when it was switched from the cooling and dehumidifying operations to the fan or heating operation.

	I	ndoor unit ope				
	Stop (1)	Cooling	Dehumidifying	Fan (2)	Heating	Note (1) Including the stop from the heating, dehumidifying
Compressor ON		Control A				and heating, and the anomalous stop (2) Including the "Fan" operation according to the
Compressor OFF	Control B					mismatch of operation modes

a) Control A

- i) If the float switch detects any anomalous draining condition, the unit stops with the anomalous stop (displays E9) and the drain pump starts. After detecting the anomalous condition, the drain motor continues to be ON.
- ii) It keeps operating while the float switch is detecting the anomalous condition.
- b) Control B

If the float switch detects any anomalous drain condition, the drain motor is turned ON for 5 minutes, and at 10 seconds after the drain motor OFF it checks the float switch. If it is normal, the unit is stopped under the normal mode or, if there is any anomalous condition, E9 is displayed and the drain motor is turned ON. (The ON condition is maintained during the drain detection.)

- 2) Drain motor (DM) interlock control
 - a) Start conditions

Depending on the function setting by the remote controller, the drain motor is turned ON under either one of the following conditions.

- i) During heating mode operation (Both the thermostat ON/OFF)
- ii) During heating mode operation (Both the thermostat ON/OFF) + Fan operation
- iii) Fan operation
- b) End conditions

The drain motor is turned OFF 5 minutes after the stop of operations i) to iii) above.

(m) Operation check/drain pump test run operation mode

- 1) If the power is turned on by the dip switch (SW7-1) on the indoor PCB when electric power source is supplied, it enters the mode of operation check/drain pump test run. It is ineffective (prohibited) to change the switch after turning power on.
- 2) When the communication with the remote controller has been established within 60 seconds after turning power on by the dip switch (SW7-1) ON, it enters the operation check mode. Unless the remote controller communication is established, it enters the drain pump test run mode.

Note (1) To select the drain pump test run mode, disconnect the remote controller connector (CNB) on the indoor PCB to shut down the remote controller communication.

3) Operation check mode


There is no communication with the outdoor unit but it allows performing operation in respective modes by operating the remote controller.

4) Drain pump test run mode

As the drain pump test run is established, the drain pump only operates and during the operation protective functions by the microcomputer of indoor unit become ineffective.

(n) Cooling, dehumidifying frost protection

1) To prevent frosting during cooling mode or dehumidifying mode operation, the of compressor speed is reduced if the indoor unit heat exchanger temperature (detected with Thi-R) drops to C °C or lower at A minutes after the start of compressor operation. If the indoor unit heat exchanger temperature is C °C or lower after B minutes, the compressor speed is reduced further. If it becomes D °C or higher, the control terminates. When the indoor unit heat exchanger temperature has become as show below after reducing the compressor speed, it is switched to the fan operation. For the selection of indoor fan speed, refer to item 2).



Model	А	В	С	D
SRC40~60	4	1	1.0	2.5
FDC71~250	4	1	1.0	2.5

2) Selection of indoor fan speed

If it enters the frost prevention control during cooling operation (excluding dehumidifying), the indoor unit fan speed is switched.

- (a) In cases of FDTC, FDUM, FDU and FDEN
 - i) When the indoor unit return air temperature (detected with Thi-A) is 23°C or lower, this control is invalidated and, as 2 hours elapse after starting the frost prevention control, it is terminated.
 - ii) If it is detected again within 15 minutes from the start of frost prevention control, the indoor fan speed is raised by 1 tap to increase the indoor unit fan speed. If it is detected within further 15 minutes, the indoor unit fan speed is raised by 1 tap more.

Note (1) Indoor unit fan speed can be increased by up to 2 taps.

- iii) "FAN CONTROL ON"/"FAN CONTROL OFF" of this control is selectable with the function setting of remote controller.
- b) In the case of FDT
 - i) When the indoor unit return air detection temperature (detected with Thi-A) is 23°C or higher and the indoor unit heat exchanger temperature (detected with Thi-R) detects the compressor frequency drop start temperature A°C+1°C, of indoor unit fan speed is increased by 20rpm.
 - ii) If the phenomenon of i) above is detected again after the acceleration of indoor unit fan, indoor unit fan speed is increased further by 20rpm.

Note (1) Indoor unit fan speed can be increased by up to 2 taps.


• Compressor frequency drop start temperature

Item	А
Temperature - Low (Factory default)	1.0
Temperature - High	2.5

Note (1) Frost prevention temperature setting can be selected with the indoor unit function setting of the wired remote controller. For details, refer to page 233.

(o) Heating overload protection [Applicable model: All models of the cooling and heating type]

If the indoor unit heat exchanger temperature (detected with Thi-R) at 63°C or higher is detected for 2 seconds continuously, the compressor stops. When the compressor is restarted after a 3-minute delay, if a temperature at 63°C or higher is detected for 2 seconds continuously within 60 minutes after initial detection and if this is detected 5 times consecutively, the compressor stops with the anomalous stop (E8). Anomalous stop occurs also when the indoor unit heat exchanger temperature at 63°C or higher is detected for 6 minutes continuously.



2) Indoor unit fan speed selection

If, after second detection of heating overload protection up to fourth, the indoor fan is set at Me and Lo taps when the compressor is turned ON, the indoor fan speed is increased by 1 tap.

(p) Anomalous fan motor [In case of FDT only]

After starting the fan motor, if the fan motor speed is 200rpm or less is detected for 30 seconds continuously and 4 times within 60 minutes, then fan motor stops with the anomalous stop (E16).


(q) Plural unit control – Control of 16 units group by one remote controller [Applicable model: All models]

1) Function

One remote controller switch can control a group of multiple number of unit (Max. 16 indoor units). "Operation mode" which is set by the remote controller switch can operate or stop all units in the group one after another in the order of unit No.⁽¹⁾. Thermostat and protective function of each unit function independently.

Note (1) Unit No. is set by SW2 on the indoor unit control PCB. Unit No. setting by SW2 is necessary for the indoor unit only. In cases of the twin, triple and double-twin specification, it is necessary set for the master and the slave units. This can be selected by SW5. (All are set for the master unit at the shipping from factory.)

SW2: For setting of 0-9, A-FSW5: For setting of master and slave units (See table shown at right.)

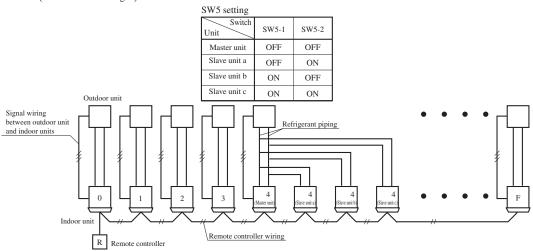

(2) Unit No. may be set at random unless duplicated, it should be better to set orderly like 0, 1, 2..., F to avoid mistake.

- 2) Display to the remote controller
 - a) Center or each remote controller basis, heating preparation: the youngest unit No. among the operating units in the remote mode (or the center mode unless the remote mode is available) is displayed.
 - b) Inspection display, filter sign: Any of unit that starts initially is displayed.
 - c) Confirmation of connected units

Pressing "AIR CON No." button on the remote controller displays the indoor unit address. If " \blacktriangle " " \checkmark " button is pressed at the next, it is displayed orderly starting from the unit of youngest No.

- d) In case of anomaly
 - i) If any anomaly occurs on a unit in a group (a protective function operates), that unit stops with the anomalous stop but any other normal units continue to run as they are.
 - ii) Signal wiring procedure

Signal wiring between indoor and outdoor units should be made on each unit same as the normal wiring. For the group control, lay connect with sires wiring between rooms using terminal blocks (X, Y) of remote controller.

Connect the remote controller communication wire separately from the power supply wire or wires of other electric devices (AC220V or higher).

(r) High ceiling control [Applicable model: All models]

In the case of indoor unit installed in a higher ceiling room, the airflow volume mode control can be changed with the wired remote controller indoor unit function "FAN SPEED SET".

Б	ion ton	Indoor unit airflow setting			
Fan tap		**********	▓▖▆▋▖▓▖▁▁		
East an and and	Standard	Hi - Me - Lo	Hi - Lo		
Fan speed set	High speed 1, 2	UHi - Hi - Me	UHi - Me		

Note (1) Factory default is Standard.

(2) At the hot-start and heating thermostat OFF, or other, the indoor unit fan is operated at the low speed tap of each setting.

(s) Abnormal temperature thermistor (return air/indoor unit heat exchanger) wire/short-circuit detection [Applicable model: All models]

1) Broken wire detection

When the return air temperature thermistor detects -20°C or lower or the heat exchanger temperature thermistor detect -40°C or lower for 5 seconds continuously, the compressor stops. After a 3-minute delay, the compressor restarts but, if it is detected again within 60 minutes after the initial detection for 6 minutes continuously, stops again (the return air temperature thermistor: E7, the heat exchanger temperature thermistor: E6).

2) Short-circuit detection

If the heat exchanger temperature thermistor detects 70°C or higher for 5 seconds continuously at 2 minutes and 20 seconds after the compressor ON during cooling operation, the compressor stops (E6).

(t) Operation permission/prohibition/coin timer control [Applicable model: All models]

Permission or prohibition of the air-conditioner operation is controlled by selecting Effective setting with the wired remote controller indoor unit function "Operation permission/prohibition" and the external input ON to CnT. Connect the remote start/ stop monitor kit and enter an external input to CnT.

(Use this when controlling the air-conditioner operation permission/prohibition with signals of coin timer, etc. available from markets.)

1) Operation permission/prohibition mode is selected by selecting Effective with the wired remote controller indoor unit function "OPERATION PERMISSION/PROHIBITION".

Normal operation (Factory default)	Effective (Operation permission/prohibition mode)
Turn CnT input ON to operate and turn CnT input OFF to stop. Inputs to CnT and the remote controller control, the start or stop on the last push first basis.	Turn CnT input ON to permit operation. Switch it OFF to prohibit the operation.

- 2) In the case of CnT input ON (Operation permission)
 - a) Air-conditioner is controlled for operation/stop, etc. in accordance with signals from the remote controller's signal wire.

(At "Center" mode setting, it is operable from the center only.)

- b) Depending on how the wired remote controller indoor unit function "OPERATION PERMISSION/PROHIBITION"
 - is set, the operation or stop of air conditioner can be selected when it is changed from CnT input OFF \rightarrow ON.

In case of normal operation	In case of Effective
Air-conditioner starts from the stopped condition	Air-conditioner starts as CnT input is turned ON.
upon receipt of signal at the item 1) above.	Signals of item 1) controls subsequent operation.
(Factory default)	(Setting at site)

- 3) In case of CnT input OFF (Operation prohibition)
 - a) Air-conditioner is unable to control the operation/stop, etc. in accordance with signals from the remote controller signal wire.
 - b) Air-conditioner stops as it changes CnT input $ON \rightarrow OFF$.
- 4) During the multiple units control, only the master accepts this control.

Slave unit does not accept. Slave unit is interlocked with the input to the master.

(u) External control (Remote display)/Remote operation [Applicable model: All models]


Always connect the standard remote controller. Otherwise, you cannot perform the remote operation.

- Output for external control (remote display) (Optional remote RUN/STOP monitor kit can be utilized.) Following output connectors (CNT) are provided on the indoor control PCB. Connect the remote RUN/STOP monitor kit and pick up from respective no-voltage contactors.
 - **Operation output**: Outputs DC12V relay drive signal during operation.
 - Heating output: Outputs DC12V relay drive signal during heating operation.
 - **Compressor ON output**: Outputs DC12V relay drive signal when the compressor is operating.
 - Error output: When any anomalous condition occurs, it outputs DC12V relay drive signal.

2) Remote operation input


Remote operation inputs (switch input, timer input) connectors (CnT) are provided on the indoor control PCB. However, the remote operation by the CnT is not effective when "Center mode" is selected with the air-conditioner.

- a) Factory default (At the shipping from factory) [Indoor function of wired remote controller "External input selector" is set at the level input.]
 - Startup at the input signal to CnT OFF → ON [Edge input] ... Air-conditioner ON
 - Stop at the input signal to CnT ON \rightarrow OFF [Edge input] ... Air-conditioner OFF



b) When the setting is changed to the pulse input at site using the indoor unit function of wired remote controller "External input selector"

It becomes effective only when the input signal to CnT is changed OFF \rightarrow ON and the air-conditioner operation [ON/ OFF] is inverted.



(v) Fan control at heating startup (Applicable model: FDT)

1) Start conditions


At the start of heating operation, if the difference of setting temperature and return air temperature is 5°C or higher after the end of hot start control, this control is performed.

- 2) Contents of control
 - a) Sampling is made at each minute and, when the indoor unit heat exchanger temperature (detected with Thi-R) is 37°C or higher, present number of revolutions of indoor unit fan speed is increased by 10min⁻¹.
 - b) If the indoor unit heat exchanger temperature drops below 35°C at next sampling, present number of revolutions of indoor unit fan speed is reduced by 10min⁻¹.
- 3) End conditions

Indoor fan speed is reduced to the setting airflow volume when the compressor OFF is established and at 30 minutes after the start of heating operation.

(w) Room temperature detection temperature compensation during heating [Applicable model: All models of the heating and cooling type]

With the standard specification, the compressor is turned ON/OFF with the thermostat setting temperature. When the thermostat is likely to turn OFF earlier because the unit is installed at the ceiling where warm air tends to accumulate, the setting can be changed with the wired remote controller indoor unit function "Heating room temperature compensation". The compressor and the heater are turned ON/OFF at one of the setting temperature +3, +2 or $+1^{\circ}$ C in order to improve the feeling of heating. The setting temperature, however, has the upper limit of 30° C.



(x) Return air temperature compensation

This is the function to compensate the deviation between the detection temperature by the return air temperature thermistor and the measured temperature after installing the unit.

- 1) It is adjustable in the unit of 0.5°C with the wired remote controller indoor unit function "RETURN AIR TEMP".
 - +1.0°C, +1.5°C, +2.0°C -1.0°C, -1.5°C, -2.0°C
- 2) Compensated temperature is transmitted to the remote controller and the compressor to control them. Note (1) The detection temperature compensation is effective on the indoor unit thermistor only.

(3) Operation control function by the wired remote controller

(a) Switching sequence of the operation mode switches of remote controller



(b) [CPU reset]

This functions when [Inspection] and [Grill Up/Down] buttons on the remote controller are pressed simultaneously. Operation is same as that of the power supply reset.

(c) [Power failure compensation function]...Electric power supply failure

- This becomes effective if "Power failure compensation effective" is selected with the setting of remote controller function.
- Since it memorizes always the condition of remote controller, it starts operation according to the contents of memory no sooner than normal state is recovered after the power failure. Although the auto swing stop position and the timer mode are cancelled, the weekly timer setting is restored with the holiday setting for all weekdays.
 After recovering from the power failure, it readjusts the clock and resets the holiday setting for each weekday so that the

After recovering from the power failure, it readjusts the clock and resets the holiday setting for each weekday so that the setting of weekly timer becomes effective.

- Content memorized with the power failure compensation are as follows.
- Note (1) Items[®], ⁽⁷⁾ and [®] are memorized regardless whether the power failure compensation is effective or not while the setting of silent mode is cancelled regardless whether the power failure compensation is effective or not.
 - ① At power failure Operating/stopped


If it had been operating under the clock off timer mode, time timer mode, the state of stop is memorized. (Although the timer mode is cancelled at the recovery from power failure, the setting of weekly timer is changed to the holiday setting for all weekdays.)

- 2 Operation mode
- 3 Airflow volume mode
- ④ Room temperature setting
- ⑤ Louver auto swing/stop

However, the stop position (4-position) is cancelled so that it returns to Position (1).

- (6) "Remote controller function items" which have been set with the remote controller function setting ("Indoor function items" are saved in the memory of indoor unit.)
- ⑦ Upper limit value and lower limit value which have been set with the temperature setting control
- 8 Clock timer and weekly timer settings (Other timer settings are not memorized.)

[Parts layout on remote controller PCB]



Control selector switch (SW1)

Switch		Function
SW1	М	Master remote controller
3771	S	Slave remote controller

Note (1) Don't change SW2 because it is not used normally.

(4) Operation control function by the outdoor controller ♦ SRC40~60 models

- (a) Outline of heating operation
 - 1) Operation of major functional components in heating mode

	Heating							
	Thermostat ON	Thermostat OFF	Defrost	Failure				
Compressor	ON	OFF	OFF	OFF				
Indoor fan motor	ON	ON(HOT KEEP)	OFF	OFF				
Outdoor fan motor	ON	OFF (few minutes ON)	OFF	OFF				
4-way valve	ON	ON	OFF	OFF (3 minutes ON)				

2) Fuzzy operation

Deviation between the room temperature setting correction temperature and the return air temperature is calculated in accordance with the fuzzy rule, and used for control of the air capacity and the inverter speed.

3) Defrosting operation

- a) Starting conditions (Defrosting operation can be started only when all of the following conditions are met.)
 - After start of heating operation
 When it elapsed 35 minutes. (Accumulated compressor operation time)
 - After end of defrosting operation
 When it elapsed 35 minutes. (Accumulated compressor operation time)
 - ③ Outdoor unit heat exchanger sensor (Th4) temperature
 - When the temperature has been below -5° C for 3 minutes continuously.
 - (4) The difference between the outdoor unit air sensor temperature and the outdoor unit heat exchanger sensor temperature
 - The ambient air temperature $\geq -2^{\circ}C : 7^{\circ}C$ or higher
 - $-15^{\circ}C \leq The ambient air temperature < -2^{\circ}C : 4/15 \times The ambient air temperature + 7^{\circ}C or higher$
 - The ambient air temperature $< -15^{\circ}$ C : -5° C or higher
 - (5) During continuous compressor operation

In addition, when the speed command from the indoor controller of the indoor unit during heating operation has counted 0 rps 10 times or more and all conditions of (), (), (), (), () above and the outdoor air temperature is 3°C or less are satisfied (note that when the temperature for Th4 is -5°C or less: 62 rps or more, -4°C or less: less than 62 rps), defrost operation is started.

- b) Reset conditions (Operation returns to the heating cycle when either one of the following is met.)
 - (1) Outdoor heat exchanger sensor (Th4) temperature: 10°C or higher
 - (2) When defrosting operation time elapsed 15min.

(b) Outline of cooling operation

1) Operation of major functional components in Cooling mode

	Cooling							
	Thermostat ON	Thermostat OFF	Failure					
Compressor	ON	OFF	OFF					
Indoor fan motor	ON	ON	OFF					
Outdoor fan motor	ON	OFF (few minutes ON)	OFF (few minutes ON)					
4-way valve	OFF	OFF	OFF					

2) Fuzzy operation

During the fuzzy operation, the air flow and the inverter speed are controlled by calculating the difference between the room temperature setting correction temperature and the return air temperature.

(c) Protective control function

1) Frost prevention control (During cooling or dehumidifying)

Operating conditions a)

- Indoor heat exchanger temperature (Th2) is lower than 5°C. i)
- 5 minutes after reaching the inverter command speed except 0 rps. ii)

b)

Detail of anti-frost	Lower		•			
Indoor heat exchanger temperature Item		2.5°C or lower	limit ⁻ speed			
Lower limit speed	25 rps	Orps	0 rps -			
Indoor fan	Depends on operation mode	Protects the fan tap just before frost prevention control	-	2.5	5	8
Outdoor fan	Depends on operation mode	Dananda an atan mada		Indoor heat exchang		-
4-way valve	OFF	Depends on stop mode	temperature		e (°C)	

Inverter

speed

command

When the indoor heat exchanger temperature is in the range of 2.5~5 °C, the speed is reduced by 4 rps at each 20 seconds. Notes (1) (2)

When the indoor heat exchanger temperature is in the range of 5~8 °C, if the inverter command speed is been maintained and the operation has continued for more than 20 seconds at the same speed, it returns to the normal cooling operation.

Reset conditions: When either of the following condition is satisfied. C)

- ① When the signal to lower the hertz is received from the indoor unit.
- (2) The inverter command speed is 0 rps.

2) Cooling overload protective control

Operating conditions: When the outdoor air temperature (Th5) is 41°C or higher continues for 30 seconds while a) the inverter command speed of other than 0 rps.


b) Detail of operation

(3)

- i) The outdoor fan is stepped up by 3 speed step. (Upper limit 8th speed.)
- ii) The lower limit of inverter command speed is set to 30 rps and even if the calculated result becomes lower than that after fuzzy calculation, the speed is kept to 30 rps. However, when the thermo becomes OFF, the speed is reduced to 0 rps.
- c) Reset conditions: When either of the following condition is satisfied.
 - (1) The outdoor air temperature is lower than 40° C.
 - 2 The inverter command speed is 0 rps.

3) Cooling high pressure control

- a) Purpose: Prevents anomalous high pressure operation during cooling.
- Detector: Outdoor heat exchanger sensor (Th4) b)
- c) Detail of operation:

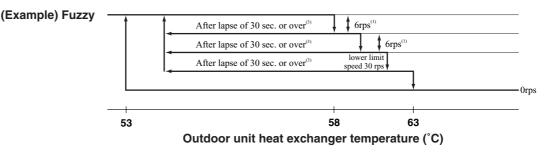

- Notes (1) When the outdoor heat exchanger temperature is in the range of 58~63 °C, the speed is reduced by 4 rps at each 30 seconds. When the temperature is 63 °C or higher continues for 1 minute, the compressor is stopped. (2)
 - When the outdoor heat exchanger temperature is in the range of 53~58 °C, if the inverter command speed is been maintained and the (3) operation has continued for more than 30 seconds at the same speed, it returns to the normal cooling operation.
 - (4)When the outdoor heat exchanger temperature in less than 53°C, it returns to the normal heating operation.


When the temperature is lower than 2.5 °C continues for 1 minute, the compressor is stopped.

Cooling low outdoor temperature protective control 4)

Operating conditions: When the ambient air temperature (Th5) is C °C or lower continues for 20 seconds while a) the inverter command speed is other than 0 rps.

b) Detail of operation:


- ① The lower limit of the inverter command speed is set to 44 (30) rps and even if the speed becomes lower than 44 (30) rps, the speed is kept to 44 (30) rps. However, when the thermo becomes OFF, the speed is reduced to 0 rps.
- (2) The upper limit of the inverter command speed is set to 50 (60) rps and even if the calculated result becomes higher than that after fuzzy calculation, the speed is kept to 50 (60) rps.

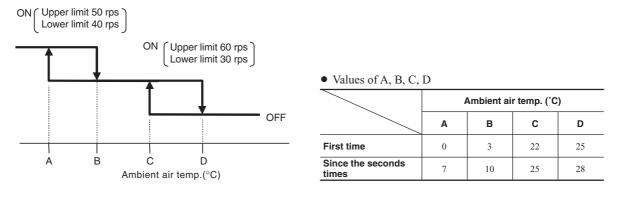

- c) Reset conditions: When either of the following condition is satisfied
 - The ambient air temperature (Th5) is D °C or higher. (1)
 - 2 The inverter command speed is 0 rps.

Heating high pressure control 5)

- a) **Purpose:** Prevents anomalous high pressure operation during heating.
- b) Detector: Indoor heat exchanger sensor (Th2)
- **Detail of operation:** c)

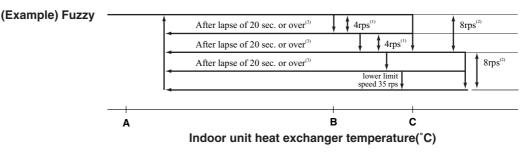

Notes (1) When the indoor heat exchanger temperature is in the range of B~C °C, the speed is reduced by 4 rps at each 20 seconds. (2) When the indoor heat exchanger temperature is C °C or higher, the speed is reduced by 8 rps at each 20 seconds.

When the indoor heat exchanger temperature is in the range of A~B °C, if the inverter command speed is been maintained and the (3)

- operation has continued for more than 20 seconds at the same speed, it returns to the normal heating operation.
- (4)When the indoor heat exchanger temperature is less than A °C. it returns to the normal heating operation.

Temperature list

Iemperature list Unit : °C								
	A	В	С					
RPSmin < 88	48.5	56	58					
88 ≦ RPSmin < 108	44	51.5	53.5					
108 ≦ RPSmin	39	46.5	48.5					

Note (1) RPSmin: The lower one between the outdoor speed and the inverter command speed

6) Heating overload protective control


a) Operating conditions: When the ambient air temperature (Th5) is 17°C or higher continues for 30 seconds while the inverter command speed other than 0 rps.

b) Detail of operation:

- ① Taking the upper limit of inverter command speed range at 50 rps, if the output speed obtained with the fuzzy calculation exceeds the upper limit, the upper limit value is maintained.
- (2) The lower limit of inverter command speed is set to 35 rps and even if the calculated result becomes lower than that after fuzzy calculation, the speed is kept to 35 rps. However, when the thermo becomes OFF, the speed is reduced to 0 prs.
- (3) The outdoor fan is set on 2nd speed.
- c) Reset conditions: The ambient air temperature (Th5) is lower than 16°C.

7) Heating low outdoor temperature protective control

- <l><l></l>
- a) Operating conditions: When the ambient air temperature (Th5) is lower than 4°C or higher than 13°C continues for 30 seconds while the inverter command speed is other than 0 rps.
- b) Detail of operation: The lower limit of inverter command speed is change as shown in the figure below.




- c) Reset conditions: When either of the following condition is satisfied.
 - ① The ambient air temperature (Th5) becomes 6°C or higher and 11°C or lower.
 - 2 The inverter command speed is 0 rps.
- <II>
- a) Operating conditions: When the outdoor heat exchanger (Th4) is -10°C or lower continues for 10 minutes while the inverter command speed is other than 0 rps.
- **b) Detail of operation:** When the inverter command speed upper limit is set at 120 rps.
- c) **Reset conditions:** When either of the following condition is satisfied.
 - ① The outdoor heat exchanger (Th4) is -7°C or higher.
 - 2 The inverter command speed is 0 rps.
 - ③ After 2 minutes have passed since this control started.

8) Compressor overheat protection

a) **Purpose:** It is designed to prevent deterioration of oil, burnout of motor coil and other trouble resulting from the compressor overheat.

b) Detail of operation

i) Speeds are controlled with temperature detected by the sensor mounted on the discharge pipe.

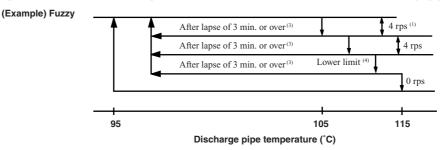

- Notes (1) When the discharge pipe temperature is in the range of 105~115°C, the speed is reduced by 4 rps.
 - (2) When the discharge pipe temperature is raised and continues operation for 20 seconds without changing, then the speed is reduced again by 4 rps.
 - (3) If the discharge pipe temperature is in the range of 95~105°C even when the inverter command speed is maintained for 3 minutes when the temperature is in the range of 95~105 °C, the speed is kept at that speed for 3 minutes. This process is repeated until the command speed is reached.



ii) If the temperature of 115°C is detected by the sensor on the discharge pipe, then the compressor will stop immediately.

When the discharge pipe temperature is over, 115°C within 1 hour, send error cord to indoor unit.

9) Current safe

- a) Purpose: Current is controlled not to exceed the upper limit of the setting operation current.
- b) Detail of operation: Input current to the converter is monitored with the current sensor fixed on the printed
 - circuit board of the outdoor unit and, if the operation current value reaches the limiting current value, the inverter command speed is reduced.

If the mechanism is actuated when the inverter command speed is less than 30 rps, the compressor is stopped immediately. Operation starts again after a delay time of 3 minutes.

10) Current cut

- a) Purpose: Inverter is protected from overcurrent.
- b) Detail of operation: Output current from the inverter is monitored with a shunt resistor and, if the current exceeds the setting value, the compressor is stopped immediately. Operation starts again after a delay time of 3 minutes.

11) Outdoor unit failure

This is a function for determining when there is trouble with the outdoor unit during air conditioning.

The compressor is stopped if any one of the following in item a), b) is satisfied. Once the unit is stopped by this function, it is not restarted.

- a) When the input current is measured at 1 A or less.
- b) If the outdoor unit sends a 0 rps signal to the indoor unit 3 times or more within 20 minutes of the power being turned on.

12) Serial signal transmission error protection

- a) **Purpose:** Prevents malfunction resulting from error on the indoor \leftrightarrow outdoor signals.
- b) Detail of operation: If the compressor is operating and a serial signal cannot be received from the indoor control with outdoor control having serial signals continues for 7 minute and 35 seconds, the compressor is stopped.

After the compressor has been stopped, it will be restarted after the compressor start delay if a serial signal can be received again from the indoor control.

13) Rotor lock

If the motor for the compressor does not turn 1/12 revolution 0.044 seconds after it has been started, it is determined that a compressor lock has occurred and the compressor is stopped.

14) Outdoor fan motor protection

If the outdoor fan motor has operated at 75 rpm or under for more than 30 seconds, the inverter and fan motor are stopped.

15) Outdoor fan control at low outdoor temperature

- Cooling
- a) Operating conditions: When the ambient air temperature (Th5) is 22°C or lower continues for 30 seconds while the inverter command speed is other than 0 rps.
- b) Detail of operation: After the outdoor fan operates at A speed for 60 seconds; the corresponding outdoor heat exchanger temperature shall implement the following controls.

• Value of A

	Outdoor fan
Ambient temperature > 10°C	2nd speed
Ambient temperature _ 10°C	1st speed

- Outdoor heat exchanger temperature ≤ 21°C After the outdoor fan speed drops (down) to 1 speed for 60 seconds; if the outdoor heat exchanger temperature is lower than 21°C, gradually reduce the outdoor fan speed by 1 speed. (Lower limit 1st speed)
- 21°C < Outdoor heat exchanger temperature ≤ 38°C
 After the outdoor fan speed maintains at A speed for 20 seconds; if the outdoor heat exchanger temperature is 21°C~ 38°C, maintain outdoor fan speed.
- ③ Outdoor heat exchanger tempeature > 38°C
 After the outdoor fan speed rises (up) to 1 speed for 60 seconds; if the outdoor heat exchanger temperature is higher than 38°C, gradually increase outdoor fan speed by 1 speed. (Upper limit 3rd speed)
- c) Reset conditions: When either of the following conditions is satisfied
 - ① The ambient air temperature (Th5) is 25°C or higher.
 - (2) The inverter command speed is 0 rps.
- Heating
- a) Operating conditions: When the ambient air temperature (Th5) is 4°C or lower continues for 30 seconds while the inverter command speed is other than 0 rps.
- b) Detail of operation: The outdoor fan is stepped up by 2 speed step at each 20 seconds. (Upper limit 8th speed)
- c) Reset conditions: When either of the following conditions is satisfied
 - (1) The ambient air temperature (Th5) is 6° C or higher.
 - 2 The inverter command speed is 0 rps.

FDC 71 - 250 models

Determination of compressor speed (frequency) (a)

Required frequency

Cooling/dehum	Cooling/dehumidifying operation U						
Model			100	125	140	200	250
Max. required	Indoor unit air flow "Hi"	88	90	105	105	100	120
frequency	Indoor unit air flow "Me", "Lo"	76	60	80	85	70	80
Min. required f	requency	20	20	20	20	30	30
-							

2) Heating operation

Heating operation	1						Unit: rps
	Model	71	100	125	140	200	250
Max. required	Indoor unit air flow "Hi"	95	90	105	110	100	120
frequency	Indoor unit air flow "Me", "Lo"	86	60	80	85	0 100 5 70	80
Min. required fre	quency	20	20	20	20	30	30

If "Silent mode start" signal is received from the remote controller, the maximum required frequency becomes same as 3) when the indoor air flow is set at "LO".

Max. required frequency under high ambient temperature in cooling mode 4)

Maximum required frequency is selected according to the outdoor air temperature (Tho-A).

							Unit: rps
	Model	71	100	125	140	200	250
Max. required	Outdoor air temperature is 40°C or higher	76	75	90	96	75	98
frequency	Outdoor air temperature is 46°C or higher	60	75	75	75	66	66

Linit: roo

Unit: rnc

Max. required frequency under ambient temperature in heating mode 5)

Maximum required frequency is selected according to the outdoor air temperature (Tho-A).

							Unit: rps
	Model	71	100	125	140	200	250
Max. required frequency	Outdoor air temperature is 18°C or higher	74	60	80	85	70	80

6) Selection of max. required frequency by heat exchanger temperature

- Maximum required frequency is selected according to the outdoor unit heat exchanger temperature (Tho-R) during 1) cooling/dehumidifying or according to the indoor unit heat exchanger temperature (Thi-R) during heating mode.
- 2) When there are 3 indoor unit heat exchanger temperatures (Thi-R), whichever the highest applies,

								Onn. ips
	Model		71	100	125	140	200	250
Max. required	Cooling/ dehumidifying	Outdoor unit heat exchanger temperature is 56°C or higher	_	_	100	100	_	_
frequency	Heating	Indoor unit heat exchanger temperature is 56°C or higher	_	_	100	100	_	_

7) When any of the controls from 1) to 6) above may duplicate, whichever the smallest value among duplicated controls is taken as the maximum required frequency.

During heating, it is operated with the maximum required frequency until the indoor unit heat exchanger temperature 8) becomes 40°C or higher.

(b) Compressor start control

- 1) Compressor starts upon receipt of the thermostat ON signal from the indoor unit.
- However, at initial start after turning the power supply breaker, it may enter the standby state for maximum 30 minutes 2) (" () (B)" is displayed on the remote controller) in order to prevent the oil loss in the compressor.

If the cooling/dehumidifying/heating operation is selected from the remote controller when the outdoor unit is in the standby state, " () (), " is displayed for 3 seconds on the remote controller.

(c) Compressor soft start control

1) Compressor protection start I

[Control condition] Normally, the compressor operation frequency is raised in this start pattern.

[Control contents] a) Starts with the compressor's target frequency at A rps.

- However, when the outdoor air temperature (Tho-A) is 35°C or higher during cooling/ dehumidifying or the indoor return air temperature (ThI-A) is 25°C or higher during heating, it starts at C rps.
- b) At 30 seconds after the start of compressor, its target frequency changes to B rps and the compressor is operated for 2 4 minutes with its operation frequency fixed at B rps.

Model	Operation mode	A rps	B rps	C rps
71	Cooling/dehumidifying	42	42	40
/1	Heating	62	62	40
100~140	Cooling/dehumidifying	55	55	30
100~140	Heating	55	55	30
200, 250	Cooling/dehumidifying	55	55	30
200, 230	Heating	55	55	30

2) Compressor protection start III - model 71

[Control condition] At 30 minutes or more after turning the power supply breaker and the number of compressor starts is only 1 counted after the power supply breaker ON.

- [Control contents] Operates by selecting one of following operation patterns a), b) and c) according to the operation mode and the outdoor air temperature (Tho-A).
- a) Low frequency operation control during cooling/dehumidifying
 - [Control condition] When the conditions of compressor protection start III are established and one of following conditions ① and ② is satisfied, the low frequency operation control is performed during cooling/dehumidifying.
 - ① When the cooling or dehumidifying operation mode is selected, 6 hours or more have elapsed after turning the power supply breaker on.
 - ⁽²⁾ When the cooling or dehumidifying operation mode is selected, the outdoor air temperature (Tho-A) is 5°C or higher. (Less than 6 hours after the power supply breaker on)

[Control contents] Compressor runs at 20 rps for 10 minutes from starting.

b) Forced heating operation control

[Control condition] When the conditions of compressor protection start III are established and the following conditions are satisfied, the forced heating operation control is performed.

When the cooling or dehumidifying operation mode is selected, the outdoor air temperature (Tho-A) is 5°C or lower. (Less than 6 hours after turning the power supply breaker on)

- [Control contents] ① Operates the compressor at 42 rps for 10 minutes forcibly in the heating mode.
 - ② Stops the compressor after the end of the control in ① above and restarts 3 minutes later in the cooling mode.
 - ③ After the restart, it operates with the compressor's frequency at 20 rps for 10 minutes in the cooling mode.
- c) Low frequency operation control during heating

[Control condition] When the conditions of compressor protection start III are established and at 30 minutes or more after turning the power supply breaker on, the low frequency operation control is performed during heating.

[Control contents] For 10 minutes from the start of compressor, it runs at 42 rps. However, when the outdoor air temperature (Tho-A) is 35°C or higher, it starts at 40 rps and changes to 42 rps 30 seconds later.

3) Compressor protection start III, models 100 - 250

[Control condition] Number of compressor starts is only 1 counted after the power supply breaker ON.

- [Control contents] Operates by selecting one of following start patterns according to the operation mode and the outdoor air temperature (Tho-A).
- a) Low frequency operation control during cooling/dehumidifying
 - [Control condition] Upon establishing the conditions of compressor protection start III, the low frequency operation control is performed during cooling/dehumidifying.
 - [Control contents] ① Starts with the compressor's target frequency at A rps. When the outdoor air temperature (Tho-A) is 35°C or higher, it starts at C rps.
 - ② At 30 seconds after the compressor start, the compressor's target frequency is changed to B rps and the compressor's operation frequency is fixed for 10 minutes.

1	I I I	5		
Model	Operation mode	A rps	B rps	C rps
100~140	Cooling/dehumidifying	55	55	30
200, 250	Cooling/dehumidifying	55	30	30

b) Low frequency operation control during heating

- [Control condition] When the conditions of compressor protection start III are established and one of following conditions ① and ② is satisfied, the low number of revolutions operation control is performed during heating.
 - ① At 30 minutes or more after turning the power supply breaker on
 - ⁽²⁾ Compressor underneath temperature (Tho-H) is 4°C or higher and the difference from the outdoor air temperature (Tho-A) becomes 4°C or higher. [model 200, 250 only]

[Control contents] ① Starts the compressor with its target frequency at A rps. However, when the indoor unit return air temperature (ThI-A) is 25°C or higher, it start at C rps.

② At 30 seconds after the start of compressor, the compressor's target frequency is changed to B rps and the compressor's operation frequency is fixed for 10 minutes.

	Model	Operation mode	A rps	B rps	C rps	
Γ	100~140	Cooling/dehumidifying	55	55	30	
	200, 250	Cooling/dehumidifying	55	30	30	

(d) Outdoor unit fan control

1) Outdoor unit fan tap and fan motor speed

Unit: min⁻¹

Model	Mode	Fan motor tap						
		① speed	2 speed	3 speed	(4) speed	(5) speed	6 speed	⑦ speed
71	Cooling/dehumidifying	200	400	600	740	810	850	950
	Heating	200	400	600	740	810	850	950
		① speed	2 speed	③ speed	(4) speed	(5) speed	6 speed	⑦ speed
100~140	Cooling/dehumidifying	200	400	600	740	820	870	910
	Heating	200	400	600	740	820	870	910 (950)(2)
		① speed	2 speed	3 speed	(4) speed	(5) speed	6 speed	⑦ speed
200, 250	Cooling/dehumidifying	200	370	560 (600) ⁽³⁾	820	850	910	950
	Heating	200	370	560 (600)(3)	820	850	910	950

Notes (1) Fan motor speed for model 200 and 250 are same for both top and bottom lines

(2) Figures in () are for model 125, 140.

(3) Figures in () are for model 250.

2) Fan tap control during cooling/heating operation

Fan taps are selected depending on the outdoor unit heat exchanger temperature (Tho-R1, R2) and the ambient air temperature (Tho-A). Note (1) It is detected by Tho-R1 or R2, whichever the higher.


• Model 71 ~ 140


	(A) zone		© zone	D zone
(a) zone Tap 5(6)		Tap 5(6)	Tap 5	Tap 4
(b) zone	Tap 5	Tap 5	Tap 4	Tap 3
© zone Tap 4		Tap 4	Tap 3	Tap 2
d zone	Tap 3	Tap 3	Tap 2	Tap 1

• Model 200, 250				
\sim	(A) zone			

	(A) zone	B zone	© zone	D zone
(a) zone	Tap 5	Tap 5	Tap 5	Tap 4
(b) zone	Tap 5	Tap 5	Tap 4	Tap 3
© zone	Tap 4	Tap 4	Tap 3	Tap 2
d zone	Tap 3	Tap 3	Tap 2	Tap 1

Note (1) Figures in () are for model 71.






Outdoor unit heat exchanger temp. (°C)

3) Fan tap control during heating operation

Fan taps are selected depending on the outdoor unit heat exchanger temperature (Tho-R1, R2) and the ambient air temperature (Tho-A). Note (1) It is detected by Tho-R1 or R2, whichever the lower.

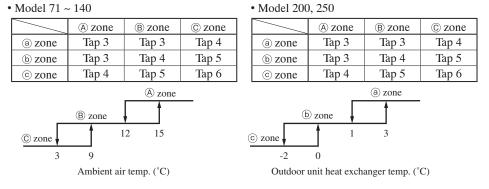

-170-

4) Outdoor unit fan control at cooling low outdoor air

a) When all the following conditions are established after the start of compressor, the following control is implemented. If the outdoor air temperature (Tho-A) is in the zone (B) in the cooling/dehumidifying mode, it has elapsed 20 seconds from the start of outdoor unit fan and the outdoor unit fan is at the tap 1 speed, the outdoor unit fan speed is controlled according to the outdoor unit heat exchanger temperature (Tho-R1, R2). Note (1) It is detected with Tho-R1 or R2, whichever the higher.

 $\underbrace{\textcircled{B} \text{ zone}}_{5 \text{ 10}} \underbrace{\textcircled{Outdoor unit fan speed}}_{20 \text{ 30}} \underbrace{\overbrace{}^{\text{Outdoor unit fan speed}}_{20 \text{ 30}} \underbrace{\underbrace{}^{\text{Outdoor unit fan speed}}_{20 \text{ 3$

- b) The outdoor unit heat exchanger temperature is detected always and, when the number of revolutions of the outdoor fan speed has been increased or decreased, there is no change of fan speed for 20 seconds.
- c) Rage of the outdoor unit fan speed under this control is as follows.
 - ① Lower limit: 130rpm
 - ② Upper limit: 500rpm
- d) As any of the following conditions is established, this control terminates.
 - i) When the outdoor air temperature is in the zone (A) and the outdoor unit heat exchanger temperature at 30°C or higher is established for 40 seconds or more continuously.
 - ii) When the outdoor fan speed is 500rpm and the outdoor unit heat exchanger temperature at 30°C or higher is established for 40 seconds or more continuously.
 - iii) When the outdoor unit heat changer temperature at 45°C or higher is established for 40 seconds or more.

5) Outdoor unit fan control by the power transistor radiator fin temperature

When all the following conditions are established later than 3 minutes after the start of compressor, the following control is implemented.

- a) Cooling/dehumidifying
 - ① Ambient air temperature Tho-A \geq 33°C
 - ② Compressor's actual frequency $\geq \mathbf{A}$ rps
 - ③ Power transistor radiator fin temperature $\geq \mathbf{C} \circ \mathbf{C}$
- b) Heating
 - ① Ambient air temperature Tho-A $\ge 16^{\circ}$ C
 - ② Compressor's actual frequency $\geq \mathbf{B}$ rps
 - ③ Power transistor radiator fin temperature $\geq \mathbf{C} \circ \mathbf{C}$
- c) Control contents
 - i) Raises the outdoor unit fan tap by 1 tap.
 - ii) When the sampling is for 60 minutes and the value of power transistor radiator fin temperature (Tho-P) is as follows.
 - ① When the power transistor radiator fin temperature (Tho-P) $\geq \mathbf{C}$ °C, the outdoor unit fan tap is raised by 1 speed further.
 - ② When C °C > power transistor radiator fin temperature (Tho-P) ≥ D °C, present outdoor unit fan tap is maintained.
 - ③ When the power transistor radiator fin temperature (Tho-P) ≥ D °C, the outdoor unit fan tap is dropped by 1 speed.
- d) Ending conditions

When the operation under the condition of item ii), (3) above and with the outdoor unit fan tap, which is determined by the item 2) is detected 2 times consecutively.

• Compressor's frequency and power transistor radiator fin temperature


Item	А	В	С	D
71	60	70	80	75
100~140	85	85	72	68
200, 250	70	70	80	75

6) Caution at the outdoor unit fan start control

When the outdoor unit fan is running at 400min⁻¹ before operating the compressor, it may operate with the compressor only, without starting up the outdoor fan This is normal.

7) Snow protection fan control

If the dip switch (SW3-2) on the outdoor unit control PCB is turned ON, the outdoor unit fan is operated for 30 seconds at 4 tap speed once in every 10 minutes depending on the outdoor air temperature (detected with Tho-A) in the stop mode or anomalous stop mode.




(e) Defrosting


1) Defrosting start conditions


If all of the following defrosting conditions A or conditions B are met, the defrosting operation starts.

- a) Defrosting conditions A
 - Cumulative compressor operation time after the end of defrosting has elapsed 37 [45] minutes, and the cumulative compressor operation time after the start of heating operation (remote controller ON) has elapsed 30 minutes.
 - ii) After 5 minutes from the compressor ON
 - iii) After 5 minutes from the start of outdoor unit fan
 - iv) After satisfying all above conditions, if temperatures of the outdoor unit heat exchanger temperature thermistor (Tho-R1, R2) and the outdoor air temperature thermistor (Tho-A) become lower than the defrosting start temperature as shown by the right figure for 15 seconds continuously, or the suction gas saturation temperature (SST) and the outdoor air temperature (Tho-A), which are obtained from the value detected by the low pressure sensor (LPT) stay for 3 minutes within the range below the defrosting operation start temperature as shown by the right figure. However, it excludes for 10 minutes after the start of compressor and the outdoor air temperature is as shown by the lower figure.



- b) Defrosting conditions B
 - When previous defrosting end condition is the time out of defrosting operation and it is in the heating operation after the cumulative compressor operation time after the end of defrosting has become 30 minutes.
 - ii) After 5 minutes from the start of compressor
 - iii) After 5 minutes from the start of outdoor unit fan

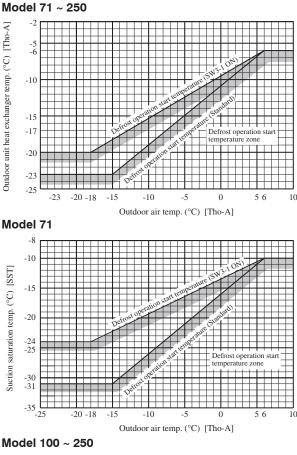



2) Defrosting end conditions

When any of the following conditions is satisfied, the defrosting end operation starts.

- a) When it has elapsed 8 minutes and 20 seconds after the start of defrosting. (After 10 minutes and 20 seconds for model 71, 200 and 280)
- b) When the outdoor unit heat exchanger temperatures (Tho-R1, R2), whichever the lower, becomes 12°C or higher for 10 seconds continuously.

3) Switching of defrosting control with SW3-1


- a) If SW3-1 on the outdoor unit control PCB is turned to ON, it becomes easier to enter the defrosting operation. Use this when installing a unit at snowing regions.
- b) Control contents
 - i) It allows entering the defrosting operation under the defrosting condition A when the cumulative heating operation time becomes 30 minutes. It is 37 [45] minutes at SW3-1 OFF (Factory default).
 - ii) It allows entering the defrosting operation under the defrosting condition B when the cumulative heating operation time becomes 25 minutes. It is 30 minutes at SW3-1 OFF (Factory default).
 - iii) It allows the defrosting operation with the outdoor unit heat exchanger temperature (Tho-R) and suction pressure saturation temperature (SST) being higher than normal. Note (1) Figures in [] are for model 71.

(f) Protective control/anomalous stop control by compressor's number of revolutions


1) Compressor discharge pipe temperature protection

a) Protective control

As the discharge pipe temperature (detected with Tho-D) exceeds the setting value, the compressor speed (frequency) is controlled to suppress the rise of discharge pipe temperature.



- b) Anomalous stop control
 - i) If the discharge pipe temperature (detected with Tho-D) exceeds the setting value, the compressor stops.
 - When it is detected 2 times within 60 minutes or after continuous 60 minutes, including the stop of compressor, E36 is displayed on the remote controller and it enters the anomalous stop mode.



Note (1) Figures in () are for model 200, 250.

c) Reset of anomalous stop mode

As it drops to the reset value of 85°C (90°C) or lower for 45 minutes continuously, it becomes possible to restart from the remote controller.

Note (1) Figures in () are for model 200, 250.

2) Cooling high pressure protection

- a) Protective control
 - i) When the outdoor air temperature (Tho-A) is 40°C or higher and the outdoor unit heat exchanger temperature (Tho-R) exceeds the setting value, the compressor speed (frequency) is controlled to suppress the rise of high pressure.
 - ii) Control value A is updated to an optimum value automatically according to the operating conditions.

Reduces compressor	Model	Control value A
speed at each minute.	Widdei	Control value A
Reset	71	
A	100~140	54~60°C
Outdoor unit heat exchanger temp. (°C)	200, 250	

- b) Anomalous stop control
 - i) As the outdoor unit heat exchanger temperature (Tho-R) exceeds the setting value, the compressor stops.
 - ii) If it is detected 5 times within 60 minutes or 65°C or higher continues for 60 minutes, including the stop of compressor, E35 is displayed on the remote controller and it enters the anomalous stop mode.





Outdoor unit heat exchanger temp. (°C)

c) Reset of anomalous stop mode


As it reaches the reset value of 51°C or lower, it becomes possible to restart from the remote controller.

3) Heating high pressure protection

- Protective control a)
 - As the indoor unit heat exchanger temperature (Thi-R) exceeds the setting value, the compressor speed i) (frequency) is controlled to suppress the rise of high pressure.
 - Control value A is updated to an optimum value automatically according to the operating conditions. ii)

Deduces commences from any		Existing piping adaptation switch: SW5-1 (SW8-1: model 80)	
Reduces compressor frequency at every 30 seconds.	Model	OFF (Shipping)	ON
Reset		Control va	lue A (°C)
Reset	71	52~58	
A	100~140	48~54	46~52
Indoor unit heat exchanger temp. (°C)	200, 250	52~58	
amalous ston control	Note (1) Adaptation to ex	xisting piping is at ON.	·

- Anomalous stop control b)
- Operation control function by the indoor unit controller See the heating overload protection, page 157.
- Adaptation to existing piping, stop control c) If the existing piping adaptation switch, SW5-1 (SW8-1: 71 type), is turned ON, the compressor stops to protect existing piping when the indoor unit heat exchanger temperature (Thi-R) exceeds the setting value.




Anomaly detection control by the high pressure switch (63H1) 4)

- If the pressure rises and operates the high pressure switch (opens at 4.15MPA/closes at 3.15MPa), the compressor stops. ii)
 - Under any of the following conditions, E40 is displayed and it enters the anomalous stop mode.
 - When it occurs 5 times within 60 minutes that pressure rises and the compressor is stopped by 63H1. Ð
 - 0 When 63H1 has been in the open state for 60 minutes continuously, including the stop of compressor.

5) Low pressure control

Protective control a)


If the value detected by the low pressure sensor (LPT) exceeds the setting value, the compressor speed (frequency) is controlled to restrain the drop of pressure.



- b) Anomalous stop control
 - When a value detected by the low pressure sensor (LPT) satisfies any of the following conditions, the compressor stops to run for its protection.
 - When the low pressure drops to 0.079MPa or under for 15 seconds continuously. 1
 - At 10 minutes after the start of compressor, the suction overheat becomes 30°C and the low pressure (2) becomes 0.15MPa or under for 60 seconds continuously.
 - E49 is displayed under any of the following conditions and it enters the anomalous stop mode. ii)
 - When the low pressure drops 3 times within 60 minutes and the compressor stops under any of the above conditions. a) When a value detected with the low pressure sensor becomes 0.079MPa or under for 5 minutes, including b) the stop of compressor.
 - iii) However, when the control condition ① is established during the compressor protection start III, E49 is displayed at initial stop and it enters the anomalous stop mode.


Compressor pressure ratio protection control 6)

- During heating operation, if the indoor unit heat exchanger temperature (Thi-R) and the outdoor unit heat exchanger a) temperature (Tho-R) exceed the setting values at 10 minutes after the start of compressor, the compressor speed (frequency) is controlled to protect the compressor.
- This control is not performed during the outdoor fan ON and for 10 minutes from the start of outdoor unit fan. b)
- This control is not performed during defrosting operation and at 10 minutes after the reset of defrosting operation. c)
- d) When there are 3 indoor unit heat exchanger temperatures (Thi-R), the highest temperature is detected.




7) Over-current protection current safe controls I, II

Detecting the outdoor unit inverter input (primary) current and the output (secondary) current, if the current values exceed setting values, the compressor speed (frequency) is controlled to protect the inverter.



(Fig. C) The control value "A" and the reset value vary depending on the compressor speed.



		Cooling		Heating	
Mode	Model		Reset value B	Control value A	Reset value B
	71	15.0	14.0	16.0	15.0
L	100	13.5 (23.0)	12.5 (22.0)	13.5 (23.0)	12.5 (22.0)
Primary current side	125, 140	13.5 (23.0)	12.5 (22.0)	13.5 (23.0)	12.5 (22.0)
5140	200	17.0	16.0	17.0	16.0
	250	20.0	19.0	20.0	19.0
	71	13.0	12.0	13.0	12.0
	100	13.0 (Fig.C)	12.0 (Fig.C)	13.0 (Fig.C)	12.0 (Fig.C)
Secandary current side	125, 140	13.0 (Fig.C)	12.0 (Fig.C)	13.0 (Fig.C)	12.0 (Fig.C)
	200	Not implemented			
	250				


Note (1) Figures in () are for single phase models.

8) Power transistor temperature protection

a) Protective control

9)


If the power transistor temperature (detected with TIP) exceeds the setting value, the compressor speed (frequency) is controlled to suppress the rise of power transistor temperature.



Note (1) Figures in ()	are for single phase mode	21 100~140.

- b) Anomalous stop control (model 200, 250 only)
 - If the power transistor temperature rises further, the protective switch in the power transistor operates to protect the compressor and the power transistor.
 - ii) Under any of the following condition, E41 is displayed and it enters the anomalous stop mode.
- ① When the protective switch in the power transistor operates 5 times within 60 minutes and the compressor stops. **Power transistor temperature control (Single phase models 100~140 only)**

This control monitors the power transistor temperature from the start of compressor operation and, when the following condition is established, controls the compressor speed.



10) Anomalous power transistor current


- a) Prevents over-current on the inverter. If the current value in the power transistor exceeds the setting value, the compressor stops.
- b) If the current value in the power transistor exceeds the specified value and the compressor stops 4 times within 30 minutes, E42 is displayed on the remote controller and it enters the anomalous stop mode.

11) Anomalous inverter PCB

If the power transistor detects any anomaly for 15 minutes, including the stop of compressor, E51 is displayed on the remote controller and it enters the anomalous stop mode.

12) Anti-freeze control by the compressor frequency control

- a) If the indoor unit heat exchanger temperature (detected with Thi-R) exceeds the setting value at 4 minutes after the start of compressor, the compressor speed (frequency) is controlled to initiate the anti-freeze control of indoor unit heat exchanger.
- b) When there are 3 indoor unit heat exchanger temperatures (Thi-R), the lowest temperature is detected.



c) Regarding the anti-freeze control by the operation stop, refer to the operation control function by the indoor unit controller and the cooling, dehumidifying frost prevention of page 157.

13) Dewing prevention control

[Control condition] During cooling and dehumidifying operation, if all the following conditions are established, the compressor speed (frequency) is reduced to prevent dewing and water splash.

- ① Cooling electronic expansion valve aperture (EEVC) is 500 pulses.
- ② Suction overheat is 10°C or higher.

expansion valve becomes 460 pulses.

③Compressor speed (frequency) is **A** rps or higher.

[Control contents] ① W

s]	① When the suction overheat is 10°C or higher, the compressor speed (frequency) is reduced at each			
	1 minute.			
	2 Compressor speed (frequency) does not rise till the cooling	Model	A rps	
	©	71	40	

(3) This control takes **A** rps as its lower limit so that compressor speed is not controlled when it is less than **A** rps.

ng	Model	A rps
-0	71	42
~ "	100~140	60
or	200, 250	60

14) Refrigerant quantity shortage protection

Under the compressor protection start III control during cooling and dehumidifying operations, the following control is performed by detecting the indoor unit heat exchanger temperature (Thi-R) and the indoor unit return air temperature (Thi-A).

[Control condition] When the state that the indoor unit heat exchanger temperature (ThI-R) does not become lower than the indoor unit return air temperature (ThI-A) by 4°C or more continues for 1 minute.

[Control contents] It judges that the flowing of refrigerant in to the indoor unit is insufficient so that the compressor is stopped and E57 is displayed on the remote controller.

15) Broken wire detection on temperature thermistor and low pressure sensor

a) Outdoor unit heat exchanger thermistor, outdoor air thermistor and low pressure sensor
 If the following is detected for 5 second continuously within 2 minutes to 2 minutes and 20 seconds after the

compressor ON, the compressor stops. After a delay of 3 minutes, it restarts but, if the same is detected repeatedly 3 times within 40 minutes, the compressor stops with the anomalous stop.

- Note (1) During defrosting and for 3 minutes after the end of defrosting, it is not detected.
- Outdoor unit heat exchanger thermistor: -50°C or lower
- Outdoor air temperature thermistor: -30 or lower
- Low pressure sensor: 0V or under or 3.49V or over
- b) Discharge pipe temperature thermistor, suction pipe temperature thermistor and underneath temperature thermistor (model 200, 250 only)

If the following is detected for 5 second continuously within 10 minutes to 10 minutes and 20 seconds after the compressor ON, the compressor stops. After a delay of 3 minutes, it restarts but, if the same is detected repeatedly 3 times within 40 minutes, the compressor stops with the anomalous stop.

- Note (1) During defrosting and for 3 minutes after the end of defrosting, it is not detected.
- Discharge pipe temperature thermistor: -10°C or lower
- Suction pipe temperature thermistor: -50 or lower
- Underneath temperature thermistor: -50°C or lower

16) Open phase protection (3-phase models only)

When 0V is detected on any of L1, L2 or L3 phase for 5 seconds continuously after the power ON, it judges the state of open phase on the power supply and activates the anomalous stop (E34) 1 second later.

- 17) Fan motor error
 - a) If the fan speed of 100rpm or under is detected for 30 second continuously under the outdoor unit fan control (with the operation command of fan tap at ① speed or higher), the compressor stops.
 - b) When the fan motor speed drops to 100rpm or under 5 times within 60 minutes and the compressor stops, it enters the anomalous stop mode with E48 displayed on the remote controller.

18) Anomalous stop by the compressor start stop

- 1) When it fails to shift to the compressor DC motor's rotor position defection operation at 5 seconds after establishing the compressor start condition, the compressor stops temporarily and restarts 3 minutes later.
- 2) If it fails to shift to the position detection operation again at second time, it judges the anomalous compressor start and stops the compressor by the anomalous stop (E59).

19) Anomalous compressor rotor lock (model 200, 250 only)

After shifting to the compressor rotor's position detection operation, if fails again to detect the rotor position, the compressor stops.

Compressor restarts 3 minutes later but, if it is operated 4 times within 15 minutes, the anomalous stop (E60) occurs.

(g) Silent mode

- 1) As "Silent mode start" signal is received from the remote controller, it operates by dropping the outdoor unit fan tap and the compressor speed (frequency).
- 2) For details, refer to items (a) and (d) above.

(h) Test run

1) It is possible to operate from the outdoor unit using the dip switch on the outdoor unit control PCB.

GW2 2	ON	SW3-4	OFF	Cooling test run
SW3-3 (SW5-3)	UN	(SW5-4)	ON	Heating test run
(3 1 3-3)	OFF	N	lormal and end	of test run

Make sure to turn SW3-3 (SW5-3) to OFF after the end of operation. Note (1) () is for model 71.

2) Test run control

- a) Operation is performed at the maximum compressor speed (frequency), which is determined for each model.
- b) Each protective control and error detection control are effective.
- c) If SW3-4 (SW5-4) is switched during test run, the compressor is stoped for once by the stop control and the cooling/ heating operation is switched.

Note (1) Figures in () are for model 71.

d) Setting and display of remote controller during test run

Model	Contents of remote controller setting/display
Cooling test run	Setting temperature of cooling is 5°C.
Heating test run	Setting temperature of heating (preparation) is 30°C.

(i) Pump-down control

Turning ON the pump-down switch SW1 (SW9) for 2 seconds during the operation stop or anomalous stop (excluding the thermostat OFF), the pump-down operation is performed. (This is invalid when the indoor unit is operating. This is effective even when the indoor unit is stopped by the anomalous stop or the power supply is turned OFF.)

1) Control contents

- a) Close the operation valve at the liquid side. (It is left open at the gas side.)
- b) Compressor is started with the target speed (frequency) at 55 (62) rps in the cooling mode. Note (1) Figures in () are for model 71.
- c) Red and green lamps (LED) flash continuously on the outdoor unit control PCB.
- d) Each of protection and error detection controls, excluding the low pressure control, anti-frost control and dewing prevention control, is effective.
- e) Outdoor unit fan is controlled as usual.
- f) Electronic expansion valve is fully opened.
- g) Solenoid valve (SV1) of model 71 is fully opened during the control.

2) Control ending conditions

a)

Stop control is initiated depending on any of the following conditions.

- Low pressure of 0.087MPA or lower is detected for 5 seconds continuously.
- i) Red LED: Light, Green LED: Flashing, Remote controller: Displays stop.
- ii) It is possible to restart when the low pressure is 0.087MPa or higher.
- iii) Electronic expansion valve (cooling/heating) is kept fully open.
- b) Stop by the error detection control
 - i) Red LED: Flashing, Green LED: Flashing
 - ii) Restart is prohibited. To return to normal operation, reset the power supply.
 - iii) Electronic expansion valve (cooling/heating) is left fully open.
- c) When the cumulative operation time of compressor under the pump-down control becomes 5 minutes.
 - i) Red LED: OFF, Green LED: Flashing, Remote controller: Stop
 - ii) It is possible to pump-down again.
 - iii) Electronic expansion valve (cooling/heating) is left fully open.
 - Note (1) After the stop of compressor, close the operation valve at the gas side.
- Caution: Since pressing the pump-down switch cancels communications with the indoor unit, the indoor unit and the remote controller display "Transmission error E5". This is normal.

1.5 APPLICATION DATA SAFETY PRECAUTIONS

- Read the "SAFETY PRECAUTIONS" carefully first of all and then strictly follow it during the installation work in order to protect yourself.
- The precautionary items mentioned below are distinguished into two levels, AWARNING and ACAUTION. WARNING : Wrong installation would cause serious consequences such as injuries or death.

CAUTION : Wrong installation might cause serious consequences depending on circumstances.

Both mentions the important items to protect your health and safety so strictly follow them by any means.

• After completing the installation, do commissioning to confirm there are no abnormalities, and explain to the customers about "SAFETY PRECAUTIONS", correct operation method and maintenance method (air filter cleaning, operation method and temperature setting method) with user's manual of this unit.

Ask your customers to keep this installation manual together with the user's manual. Also, ask them to hand over the user, s manual to the new user when the owner is changed.

• Installation should be performed by the specialist. If you install the unit by yourself, it may lead to serious trouble such as water leakage, electric shock, fire, and injury due to overturn of the unit.	0
 Install the system correctly according to these installation manuals. Improper installation may cause explosion, injury, water leakage, electric shock, and fire. 	0
• Consider measurement not to exceed the limit of the density of refrigerant in the event of leakage especially when it is installed in a small room. Consult the specialist about the measure. If the density of refrigerant exceeds the limit in the event of the leakage, serious accidents may occur due to lack of oxygen.	0
• Use the genuine accessories and the specified parts for installation. If parts unspecified by our company are used it could cause water leakage, electric shock, fire, and injury due to overturn of the unit.	0
 Ventilate the working area well in case the refrigerant leaks during installation. If the refrigerant contacts the fire, toxic gas is produced. 	0
 Install the unit in a location that can hold heavy weight. Improper installation may cause the unit to fall leading to accidents. 	0
• Install the unit properly in order to be able to withstand strong winds such as typhoons, and earthquakes. Improper installation may cause the unit to fall leading to accidents.	0
• Do not mix air in to the cooling cycle on installation or removal of the air conditioner. If air is mixed in, the pressure in the cooling cycle will rise abnormally and may cause explosion and injuries.	\bigcirc
• Be sure to have the electrical wiring work done by qualified electrical installer, and use exclusive circuit. Power source with insufficient capacity and improper work can cause electric shock and fire.	0
• Use specified wire for electrical wiring, fasten the wiring to the terminal securely, and hold the cable se- curely in order not to apply unexpected stress on the terminal. Loose connections or hold could result in abnormal heat generation or fire.	0
 Arrange the electrical wires in the control box properly to prevent them from rising. Fit the lid of the services panel property. Improper fitting may cause abnormal heat and fire. 	0
• Check for refrigerant gas leakage after installation is completed. If the refrigerant gas leaks into the house and comes in contact with a fan heater, a stove, or an oven, toxic gas is produced.	0
• Use the specified pipe, flare nut, and tools for R410A. Using existing parts (R22) could cause the unit failure and serious accident due to explosion of the cooling cycle.	0
• Tighten the flare nut according to the specified method by with torque wrench. If the flare nut were tightened with excess torque, it could cause burst and refrigerant leakage after a long period.	0

• Make sure there is no dust or clogging on both the plug and the socket nor loose connection of the socket before plugging, and plug in securely to the end of the blade. Accumulation of dust, clogging on the socket or plug, or loose installation of the socket could cause electric shock and fire. Replace the socket if it is loose.	0
• Connect the pipes for refrigeration circuit securely in installation work before compressor is operated. If the compressor is operated when the service valve is open without connecting the pipe, it could cause explosion and injuries due to abnormal high pressure in the system.	0
• Stop the compressor before removing the pipe on pump down work. If the pipe is removed when the compressor is in operation with the service valve open, air would be mixed in the refrigeration circuit and it could cause explosion and injuries due to abnormal high pressure in the cooling cycle.	0
• Use the genuine optional parts. And installation should be performed by a specialist. If you install the unit by yourself, it could cause water leakage, electric shock and fire.	0
• Do not repair by yourself. And consult with the dealer about repair. Improper repair may cause water leakage, electric shock or fire.	\bigcirc
Consult the dealer or a specialist about removal of the air conditioner. Improper installation may cause water leakage, electric shock or fire.	0
• Turn off the power source during servicing or inspection work. If the power is supplied during servicing or inspection work, it could cause electric shock and injury by the operating fan.	0
• Do not run the unit when the panel or protection guard are taken off. Touching the rotating equipment, hot surface, or high voltage section could cause an injury to be caught in the machine, to get burned, or electric shock.	\bigcirc
• Shut off the power before electrical wiring work. It could cause electric shock, unit failure and improper running.	0

• Perform earth wiring surely. Do not connect the earth wiring to the gas pipe, water pipe, lightning rod and telephone earth wiring. Improper earth could cause unit failure and electric shock due to a short circuit.	e
• Use the circuit breaker of correct capacity. Using the incorrect capacity one could cause the system failure and fire.	0
• Do not use any materials other than a fuse of correct capacity where a fuse should be used. Connecting the circuit by wire or copper wire could cause unit failure and fire.	\bigcirc
• Do not install the indoor unit near the location where there is possibility of flammable gas leakages. If the gas leaks and gathers around the unit, it could cause fire.	\bigcirc
• Do not install and use the unit where corrosive gas (such as sulfurous acid gas etc.) or flammable gas (such as thinner, petroleum etc.) may be generated or accumulated, or volatile flammable substances are handled. It could cause the corrosion of heat exchanger, breakage of plastic parts etc. And inflammable gas could cause fire.	\bigcirc
• Do not use the indoor unit at the place where water splashes such as laundry. Indoor unit is not waterproof. It could cause electric shock and fire.	\bigcirc
• Do not use the indoor unit for a special purpose such as food storage, cooling for precision instrument, preservation of animals, plants, and a work of art. It could cause the damage of the items.	\bigcirc
• Do not install nor use the system near equipments which generate electromagnetic wave or high harmon- ics. Equipments like inverter equipment, private power generator, high-frequency medical equipment, or telecommuni- cation equipment might influence the air conditioner and cause a malfunction and breakdown. Or the air conditioner might influence medical equipments or telecommunication equipments, and obstruct their medical activity or cause jamming.	\Diamond
• Do not install the remote controller at the direct sunlight. It could cause breakdown or deformation of the remote controller.	\bigcirc

 Do not install the indoor unit at the place listed below. Places where flammable gas could leak. Places where carbon fiber, metal powder or any powder is floated. Place where the substances which affect the air conditioner are generated such as sulfide gas, chloride gas, acid or alkali. Places exposed to oil mist or steam directly. On vehicles and ships Places where cosmetics or special sprays are frequently used. Highly salted area such as beach. Heavy snow area Places where the system is affected by smoke from a chimney. Altitude over 1000m 	\bigotimes
• Do not put any valuables which will break down by getting wet under the air conditioner. Condensation could drop when the relative humidity is higher than 80% or drain pipe is clogged, and it damages user's belongings.	\bigcirc
• Do not use the base frame for the outdoor unit which is corroded or damaged after a long period of use. It could cause the unit falling down and injury.	\bigcirc
• Pay attention not to damage the drain pan by weld sputter when brazing work is done near the unit. If sputter entered into the unit during brazing work, it could cause damage (pinhole) of drain pan and leakage of water. To avoid damaging, keep the indoor unit packed or cover the indoor unit.	0
• Install the drain pipe to drain the water surely according to the installation manual. Improper connection of the drain pipe may cause dropping water into room and damaging user's belongings.	0
• Do not put the drain pipe directly into the ditch where toxic gas such as sulfide gas is generated. Toxic gas would flow into the room and it would cause serious damage to useris health and safety.	\bigcirc
• Do not share the drain pipe for indoor unit and GHP (Gas Heat Pump system) outdoor unit. Toxic exhaust gas would flow into room and it might cause serious damage (some poisoning or deficiency of oxy- gen) to userís health and safety.	\bigcirc
• For drain pipe installation, be sure to make descending slope of greater than 1/100, not to make traps, and not to make air-bleeding. Check if the drainage is correctly done during commissioning and ensure the space for inspection and maintenance.	0
• Ensure the insulation on the pipes for refrigeration circuit so as not to condense water. Incomplete insulation could cause condensation and it would wet ceiling, floor, and any other valuables.	
• Do not install the outdoor unit where is likely to be a nest for insects and small animals. Insects and small animals could come into the electronic components and cause breakdown and fire. Instruct the user to keep the surroundings clean.	\bigcirc
• Pay extra attention, carrying the unit by hand. Carry the unit with 2 people if it is heavier than 20kg. Do not use the plastic straps but the grabbing place, moving the unit by hand. Use protective gloves in order to avoid injury by the aluminum fin.	0
 Make sure to dispose of the packaging material. Leaving the materials may cause injury as metals like nail and woods are used in the package. 	0
• Do not operate the system without the air filter. It may cause the breakdown of the system due to clogging of the heat exchanger.	\bigcirc
Do not touch any button with wet hands. It could cause electric shock.	\bigcirc
• Do not touch the refrigerant piping with bare hands when in operation. The pipe during operation would become very hot or cold according to the operating condition, and it could cause a burn or frostbite.	\bigcirc
Do not clean up the air conditioner with water. It could cause electric shock.	\bigcirc
• Do not turn off the power source immediately after stopping the operation. Be sure to wait for more than 5 minutes. Otherwise it could cause water leakage or breakdown.	Ó
• Do not control the operation with the circuit breaker. It could cause fire or water leakage. In addition, the fan may start operation unexpectedly and it may cause injury.	\bigcirc

1.5.1 Installation of indoor unit

(1) Ceiling cassette-4 way compact (600×600mm)-type (FDTC)

(a) Selection of installation location

- 1) Select location where the space above ceiling is larger than those mentioned below and perfect draining can be assured.
- 2) With the customer's consent, select a location with following suitable conditions.
 - a) Where cool air or hot air can easily pass through.

If the height of the location exceeds 3 m, hot air will gather in the ceiling. Suggest to the customer to also install a circulator.

- b) Where water can be completely drained. A sloping location for drainage.
- c) Where there are no wind disturbances to the air return and air supply, where the fire alarm will not be set off erroneosly, where no short circuits occur.
- d) Where there is no direct sunlight.
- e) Areas where dew point is lower than around 28°C and relative humidity is lower than 80%.

This indoor unit is tested under the condition of ISO high humidity condition and confirmed there is no problem. However, there is some risk of condensation drop if the air conditioner is operated under the severer condition than mentioned above.

If there is a possibility to use it under such a condition, attach additional insulation of 10 to 20mm thick

- for entire surface of indoor unit, refrigeration pipe and drain pipe.
- 3) Consider the supporting strength of the location. If the strength is not sufficient to sustain the unit weight, use reinforcing materials.
 Installtation space

(b) Installation space for unit


- a) When a sufficient interval cannot be secured between the unit and a wall or another unit, shut up diffusers on that side to block winds and make sure that no short-circuiting is occurring. (A wind blocking material is available as an optional part)
 - that s an two

• Do not use the unit in the "Lo" wind mode, when winds are blown into two or three directions.

Note (1) If you are mounting units close together, leave a space of 4000 or greater between unit.

Unit: mm

///

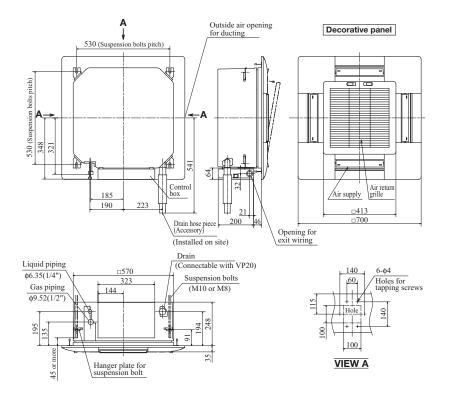


(c) Suspension

• Please arrange four sets of a suspension bolt (M10 or M8), a nut matching the bolt, a flat washers and a spring washer on the installation site.

(i) When suspension from the ceiling

- This unit is designed for installation on a 2 × 2 grid ceiling. If necessary, please detach the T bar temporarily before you install it.
 (When it is installed on a ceiling other than 2 × 2 grid ceiling, please do not fail to provide an inspection port on the control box side.
- 2) Determine the positions of suspension bolts (530×530) .
- 3) Use four suspension bolts, each fastened in such a manner that it can withstand pull force of 50kgf.
- 4) Make suspension bolts to the length that leaves approximately 45mm of them above the ceiling. In hoisting the unit main body in, temporarily fasten the four lower nuts of the suspension bolts approx. 93 mm from the ceiling and the four upper nuts at positions sufficiently far from the lower nuts so that they may not hamper installation work when the unit is hoisted in or the height is adjusted.
 5) Put in the unit on an angle.

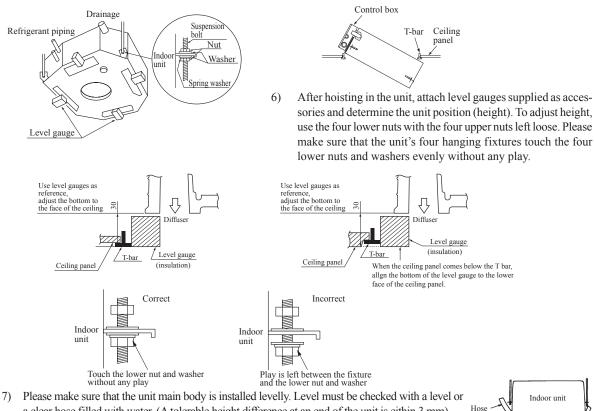

a clear hose filled with water. (A tolerable height difference at an end of the unit is eithin 3 mm)After you have adjusted the height and level of the unit, fasten the four upper nuts to fix the unit.


Note (1) Do not adjust the height with the upper nuts. It may cause deformation due to excessive force working on the unit main body, which can result in such problems that you cannot attach the panel or noises are generated from the interfering fan.

(ii) When embedded into ceiling

- 1) Determine the positions of hanging bolts (530×530) .
- The pitch center of a suspension bolt must accord with the center of the unit.
- 2) Use four suspension bolts, each fastened in such a manner that it can withstand pull force of 50 kgf.
- 3) Fix the unit as per (i) 6) and 8) above.
- Note (1): When a suspension bolt exceeds 1.3 m in length, use an M10 bolt and give it reinforcements such as braces.

(d) Drain Piping

- 1) Glue the drain hose supplied as an accessory and a VP-20 joint before lifting the unit.
- 2) The drain hose is to provide a buffer to absorb a slight dislocation of the unit or the drain piping during installation work. If it is subject to abuse such as being bent or pulled deliberately, it may break, which will result in a water leak.



- 3) Care must be taken so as not to allow an adhesive to run into the drain hose. When it is hardened, it can cause a breakage of a flexible part, if the flexible part receives stress.
- 4) Use VP-20 general-purpose hard PVC pipes for drain piping.
- 5) Insert the drain hose supplied as an accessory (soft PVC end) to the stepped part of the unit's drain socket and then fasten it with the clamp also supplied as an accessory.
- 6) Adhesive must not be used.
 - a) Glue a VP-20 joint (to be procured locally) to joint it with the drain hose (hard PVC end) and then glue a VP-20 (to be procured locally) to the joint.
 - b) Give the drain piping a descending grade (1/50-1/100) and never create a bump to go over or a trap.
 - c) In connecting drain pipes, care must be taken so as not to apply force to the unit side piping and fix the pipe at a point as close to the unit as possible.
 - d) Do not create an air vent under any circumstances.
 - e) When drain piping is implemented for more than one unit, provide a collecting main about 100 mm below the units' drain outlets from which it collects drain. Use a VP-30 or larger pipe for a collecting main.
 - f) Do not fail to provide heat insulation at the following two points because they can cause dew condensation and a resultant water leak.
- 7) Drain socket

After a drain test is completed, apply a pipe cover (small: accessory) onto the drain socket, cover the pipe cover (small), the clamp and part of the drain hose with a pipe cover (large: accessory) and wrap it with a tape completely without leaving any gaps.

(Cut pipe covers into appropriate shapes)

- 8) Hard PVC pipes laid indoor
 - a) Since a drain pipe outlet can be raised up to 600 mm from the ceiling, use elbows, etc. to install drain pipes, it there are obstacles preventing normal drain pipe arrangement. When the drain pipe is raised at a point far from a unit, it can cause an overflow due to a back flow of drain upon stoppage, so arrange piping to keep the dimensions specified in the illustration shown on the left.
 - b) Install the drain pipe outlet where no odor is likely to be generated.
 - c) Do not lead the drain pipe into a ditch where the generation of harmful gas such as sulfuric gas or flammable gas is expected. A failure to observe this instruction may cause such harmful or flammable gas to flow into the room.

Drainage test

- ① Check that water is draining thorophly during test run, and that there are no water leaks from the joints and the drain pan.
- (2) The test has to be performed even if the unit is installed in the season when the unit is used for healting.
- ③ In a new house, perform the test before the ceiling is fitted.
 - Using a water pump, pour about 1000 cc of water to the drain pan through the blowing outlet.
 - Check the transparent drain-out section of the drain hose for normal flow of drainage.
 - * While observing the noise from the drain motor, test drain operation.
 - Take off the drain plug to release the water. After the water is drained, place the drain pulg back where it was..
 - * Be careful not to get splashed when pulling the drain plug.


Drain pump operation


- \odot In case electrical wiring work finished
 - Drain pump can be operated by remote controller (wired).


For the operation method, refer to Operation for drain pump in the installation manual for wiring work.


○ In case electrical wiring work not finished

Drain pump will run continuously when the dip switch "SW7-1" on the indoor unit PCB is turned ON, the Connector CNB is disconnected, and then the power supply (230VAC on the terminal block ① and ②) is turned ON. Make sure to turn OFF "SW7-1" and reconnect the Connector CNB after the test.









Drain pl

Put the tip of the feed water pump in the drain pan of the unit body • Setup from a remote controller side.

Drain pump operation from remote control unit is possible. Operate a remote control unit by following the steps described below.

1. To start a forced drain pump operation.

- ① Press the TEST button for three seconds or longer.
 - The display will change " 🏶 TEST RUN 🛛 🔻 "
- O Press the V button once and cause "**DRAIN PLAP** \clubsuit " to be displayed.
- ③ When the O (SET) button is pressed, a drain pump operation will start. Display: "OO TO STOP"

2. To cancel a drain pump operation.

- ① If either O (SET) or OON/OFF button is pressed, a forced drain pump operation will stop. The air conditioning system will become OFF.
- O If two (2) remote controllers are connected to one (1) inside unit, only the master controller is available for trial operation and confirmation of operation data. (The slave remote controller is not available.)

(e) Panel installation


1) Accessories (It is attach to the panel)

1	Hook	FD	1 piece	For fixing temporarily
2	Chain	roccoor	2 piece	
3	Screw	Taman	4 piece	For hoisting the panel
4	Screw	() Im	1 piece	For attaching a hook
5	Screw	Ann	2 piece	For attaching a chain


 Make sure that the unit main body is positioned at the correct height and the opening on the ceiling is made to the correct dimensions with the level gauge supplied with the main body.

Remove the level gauge before you attach the panel.


3) Screw in two bolts out of the four supplied with the panel by about slightly less than 5mm. (mark (B) [Figure 1]

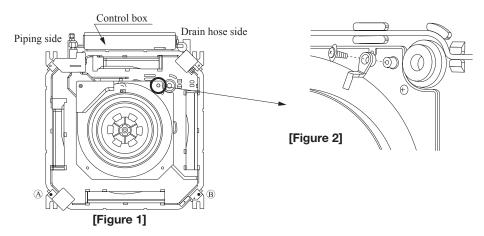


- 4) Attach the hook supplied with the panel to the main body with the hook fixing screw (1 screw). [Figure 2]
- 5) Open the air inlet grille.
- 6) Please remove the screw of a corner panel and remove a corner panel. (four places) [Figure 3]




7) A panel is hooked on two bolts (\bigcirc mark $\bigcirc \bigcirc$) [Figure 4]

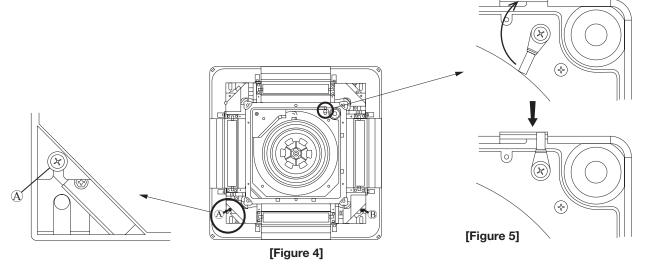

- 8) Please rotate a hook, put in the slot on the panel, and carry out fixing the panel temporarily. [Figure 5]
- 9) Tighten the two bolts used for fixing the panel temporarily and the other two.
- 10) Please open the lid of a control box.
- 11) Like drain pump wiring, please band together by the clamp and put in louver motor wiring into a control box. [Figure 6]
- 12) Please connect a louver motor connector. [Figure 6]



13) Attach two chains to the air return grille with two screws. [Figure 7]

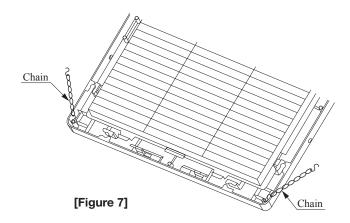

- 14) Replace the corner panels. Please also close a chain with a screw together then.
- 15) Close the air return grille.

(2) Ceiling cassette-4way-type (FDT)

(a) Selection of installation location for the indoor unit


- ① Select the suitable areas to install the unit under approval of the user.
 - Areas where the indoor unit can deliver hot and cold wind sufficiently. Suggest to the user to use a circulator if the ceiling height is over 3m to avoid warm air being accumulated on the ceiling.
 - Areas where there is enough space to install and service.
 - Areas where it can be drained properly. Areas where drain pipe descending slope can be taken.
 - Areas where there is no obstruction of airflow on both air return grille and air supply port.
 - Areas where fire alarm will not be accidentally activated by the air conditioner.
 - · Areas where the supply air does not short-circuit.
 - · Areas where it is not influenced by draft air.
 - · Areas not exposed to direct sunlight.
 - Areas where dew point is lower than around 28°C and relative humidity is lower than 80%.
 - This indoor unit is tested under the condition of ISO high humidity condition and confirmed there is no problem. However, there is some risk of condensation drop if the air conditioner is operated under the severer condition than mentioned above.

If there is a possibility to use it under such a condition, attach additional insulation of 10 to 20mm thick for entire surface of indoor unit, refrigeration pipe and drain pipe.

- Areas where TV and radio stays away more than 1m. (It could cause jamming and noise.)
- Areas where any items which will be damaged by getting wet are not placed such as food, table wares, server, or medical equipment under the unit.
- Areas where there is no influence by the heat which cookware generates.
- · Areas where not exposed to oil mist, powder and/or steam directly such as above fryer.
- Areas where lighting device such as fluorescent light or incandescent light doesn't affect the operation.
- (A beam from lighting device sometimes affects the infrared receiver for the wireless remote controller and the air conditioner might not work properly.)
- (2) Check if the place where the air conditioner is installed can hold the weight of the unit. If it is not able to hold, reinforce the structure with boards and beams strong enough to hold it. If the strength is not enough, it could cause injury due to unit falling.
- ③ If there are 2 units of wireless type, keep them away for more than 6m to avoid malfunction due to cross communication.
- ④ When plural indoor units are installed nearby, keep them away for more than 4 to 5m.

Space for installation and service

- When it is not possible to keep enough space between indoor unit and wall or between indoor units, close the air supply port where it is not possible to keep space and confirm there is no short circuit of airflow.
- Install the indoor unit at a height of more than 2.5m above the floor.

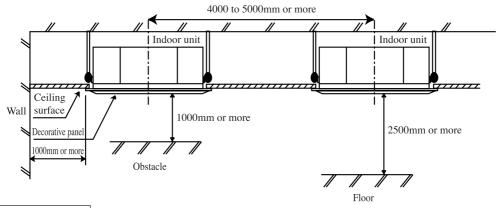

Set blow-out pattern

- Select the most proper number of blow-out air supply port direction from 4 way, 3 way or 2 way according to the shape of the room and installation position. (1 way is not available.)
- If it is necessary to change the number of air supply port, prepare the covering materials. (sold as accessory)
- Instruct the user not to use low fan speed when 2way or 3way air supply is used.
- Do not use 2way air supply port under high temperature and humidity environment. (Otherwise it could cause condensation and leakage of water.)
- It is possible to set the airflow direction port by port independently. Refer to the user's manual for details.

(b) Preparation before installation


• If suspension bolt becomes longer, do reinforcement of earthquake resistant.

○ For grid ceiling

When suspension bolt length is over 500mm, or the gap between the ceiling and roof is over 700mm, apply earthquake resistant brace to the bolt.


- In case the unit is hanged directly from the slab and is installed on the ceiling plane which has enough strength. When suspension bolt length is over 1000mm, apply the earthquake resistant brace to the bolt.
- Prepare four (4) sets of suspension bolt, nut and spring washer (M10 or M8) on site.

Ceiling opening, Suspension bolts pitch, Pipe position

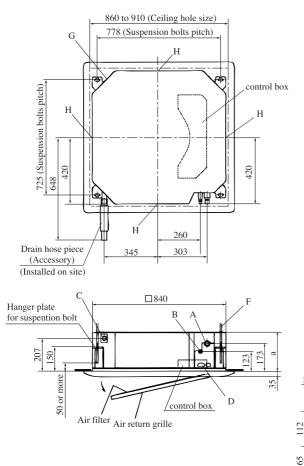

		(mm)
Series	Туре	а
Single Split (PAC)	40 to 71 type	246
series	100 to 140 type	298


Symbol	
A	Gas piping
В	Liquid piping
С	Drain piping
D	Hole for wiring
F	Suspension bolts
G	Outside air opening for ducting
Н	Air outlet opening for ducting



(c) Installation of indoor unit

Work procedure

- 1) Prepare a ceiling hole with the size of from 860mm \times 860mm to 910mm \times 910mm referring to the template attached in the package.
- 2) Arrange the suspension bolt at the right position (725mm \times 778mm).
- 3) Make sure to use four suspension bolts and fix them so as to be able to hold 500N load.
- 4) Ensure that the lower end of the suspension bolt should be 50mm above the ceiling plane. Temporarily put the four lower nuts 150mm above the ceiling plane and the upper nuts on distant place from the lower nuts in order not to obstruct hanging the indoor unit or adjust the indoor unit position, and then hang the indoor unit.
- 5) Adjust the indoor unit position after hanging it by inserting the level gauge attached on the package into the air supply port and checking if the gap between the ceiling plane and the indoor unit is appropriate. In order to adjust the indoor unit position, adjust the lower nuts while the upper nuts are put on distant place. Confirm there is no backlash between the hanger plate for suspension bolt and the lower nut and washer.

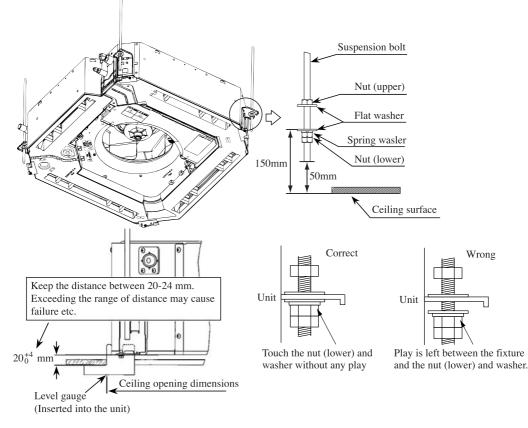


(d) Installation of indoor unit (continued)

- 1) Make sure to install the indoor unit horizontally. Confirm the levelness of the indoor unit with a level gauge or transpar-ent hose filled with water. Keep the height difference at both ends of the indoor unit within 3mm.
- 2) Tighten four upper nuts and fix the unit after height and levelness adjustment.

Caution

- Do not adjust the height by adjusting upper nuts. It will cause unexpected stress on the indoor unit and it will lead to deformation of the unit, failure of attaching a panel, and generating noise from the fan.
- Make sure to install the indoor unit horizontally and set the gap between the unit underside and the ceiling plane properly. Improper installation may cause air leakage, dew condensation, water leakage and noise.
- Even after decorative panel attached, still the unit height can be adjusted finely. Refer to the installation manual for decorative panel for details.
- Make sure there is no gap between decoration panel and ceiling surface, and between decora-tion panel and the indoor unit. The gap may cause air leakage, dew condensation and water leakage.
- In case decorative panel is not installed at the same time, or ceiling material is installed after the unit installed, put the cardboard template for installation attached on the package (packing material of cardboard box) on the bottom of the unit in order to avoid dust coming into the indoor unit.



(e) Refrigerant pipe

Caution


- Use the new refrigerant pipe.
 - When re-using the existing pipe system for R22 or R407C, pay attention to the following items.
 - Change the flare nuts with the attached ones (JIS category 2), and reprocess the flare parts.
 - Do not use thin-walled pipes.
- Use phosphorus deoxidized copper alloy seamless pipe (C1220T specified in JIS H3300) for refrigeration pipe installation. In addition, make sure there is no damage both inside and outside of the pipe, and no harmful substances such as sulfur, oxide, dust or a contaminant stuck on the pipes.
- Do not use any refrigerant other than R410A.
 Using other refrigerant except R410A (R22 etc.) may degrade inside refrigeration oil. And air getting into refrigeration circuit may cause over-pressure and resultant it may result in bursting, etc.
- Store the copper pipes indoors and seal the both end of them until they are brazed in order to avoid any dust, dirt or water getting into pipe. Otherwise it will cause degradation of refrigeration oil and compressor breakdown, etc.
- Use special tools for R410 refrigerant.

Work procedure

- 1) Remove the flare nut and blind flanges on the pipe of the indoor unit.
 - * Make sure to loosen the flare nut with holding the nut on pipe side with a spanner and giving torque to the nut with another spanner in order to avoid unexpected stress to the copper pipe, and then remove them.
 - (Gas may come out at this time, but it is not abnormal.)
 - Pay attention whether the flare nut pops out. (as the indoor unit is sometimes pressured.)
- 2) Make a flare on liquid pipe and gas pipe, and connect the refrigeration pipes on the indoor unit.
 - *Bend the pipe with as big radius as possible and do not bend the pipe repeatedly. In addition, do not twist and crush the pipes.
 - ✤Do a flare connection as follows:
 - Make sure to loosen the flare nut with holding the nut on pipe side with a spanner and giving torque to the nut with another spanner in order to avoid unexpected stress to the copper pipe, and then remove them.
 - When fastening the flare nut, align the refrigeration pipe with the center of flare nut, screw the nut for 3-4 times by hand and then tighten it by spanner with the specified torque mentioned in the table below. Make sure to hold the pipe on the indoor unit securely by a spanner when tightening the nut in order to avoid unexpected stress on the copper pipe.
- 3) Cover the flare connection part of the indoor unit with attached insulation material after a gas leakage inspection, and tighten both ends with attached straps.
 - Make sure to insulate both gas pipes and liquid pipes completely.
 - * Incomplete insulation may cause dew condensation or water dropping.
- 4) Refrigerant is charged in the outdoor unit.

As for the additional refrigerant charge for the indoor unit and piping, refer to the installation manual attached to the outdoor unit.

Pipe diameter	Tightening torque N·m
φ 6.35	14 to 18
φ 9.52	34 to 42
ф 12.7	49 to 61
φ 15.88	68 to 82
φ 19.05	100 to 120




Drain pipe (f)

Caution


- Install the drain pipe according to the installation manual in order to drain properly. Imperfection in draining may cause flood indoors and wetting the household goods, etc.
- Do not put the drain pipe directly into the ditch where toxic gas such as sulfur, the other harmful and inflammable gas is generated. Toxic gas would flow into the room and it would cause serious damage to useris health and safety (some poisoning or deficiency of oxygen). In addition, it may cause corrosion of heat exchanger and bad smell.
- Connect the pipe securely to avoid water leakage from the joint.
- Insulate the pipe properly to avoid condensation drop.
- Check if the water can flow out properly from both the drain outlet on the indoor unit and the end of the drain pipe after installation.
- Make sure to make descending slope of greater than 1/100 and do not make up-down bend and/or trap in the midway. In addition, do not put air vent on the drain pipe. Check if water is drained out properly from the pipe during commissioning. Also, keep sufficient space for inspection and maintenance.

Work procedure


- 1) Insert the supplied drain hose (the end made of soft PVC) to the step of the drain socket on the indoor unit and fix it securely with the clamp. pipe cover (big)
 - Do not apply adhesives on this end.

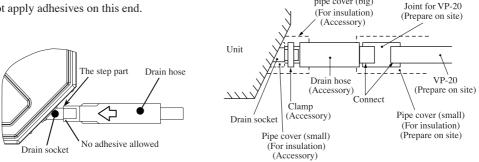


- 2) Prepare a joint for connecting VP-20 pipe, adhere and connect the joint to the drain hose (the end made of rigid PVC), and adhere and connect VP-20 pipe (prepare on site).
 - * As for drain pipe, apply VP-20 made of rigid PVC which is on the market.
 - Make sure that the adhesive will not get into the supplied drain hose.
 - It may cause the flexible part broken after the adhesive is dried up and gets rigid.
 - The flexible drain hose is intended to absorb a small difference at installation of the unit or drain pipes. Intentional bending, expanding may cause the flexible hose broken and water leakage.



- 3) Make sure to make descending slope of greater than 1/100 and do not make up-down bend and/or trap in the midway.
 - Pay attention not to give stress on the pipe on the indoor unit side, and support and fix the pipe as close place to the unit as possible when connecting the drain pipe.
 - Do not set up air vent.



• When sharing a drain pipe for more than one unit, lay the main pipe 100mm below the drain outlet of the unit. In addition, select VP-30 or bigger size for main drain pipe.




Descending slope greater than 1/100

- 4) Insulate the drain pipe.
 - Be sure to insulate the drain socket and rigid PVC pipe installed indoors otherwise it may cause dew condensation and water leakage.
 - * After drainage test implementation, cover the drain socket part with pipe cover (small size), then use the pipe cover (big size) to cover the pipe cover (small size), clamps and part of the drain hose, and fix and wrap it with tapes to wrap and make joint part gapless.

Drain up


• The position for drain pipe outlet can be raised up to 700mm above the ceiling. Use elbows for installation to avoid obstacles inside ceiling. If the horizontal drain pipe is too long before vertical pipe, the backflow of water will increase when the unit is stopped, and it may cause overflow of water from the drain pan on the indoor unit. In order to avoid overflow, keep the horizontal pipe length and offset of the pipe within the limit shown in the figure below.



(g) Drain pipe (continued)

Drain test

- After installation of drain pipe, make sure that drain system work in good condition and no water leakage from joint and drain pan. Check if the motor sound of drain pump is normal or not.
- Do drain test even if installation of heating season.
- For new building cases, make sure to complete the test before hanging the ceiling.
- 1) Pour water of about 1000cc into the drain pan in the indoor unit by pump so as not to get the electrical component wet.
- 2) Make sure that water is drained out properly and there is no water leakage from any joints of the drain pipe at the test. Confirm that the water is properly drained out while the drain motor is operating. At the drain socket (transparent), it is possible to check if the water is drained out properly.
- 3) Unplug the drain plug on the indoor unit to remove remaining water on the drain pan after the test, and re-plug it. And insulate the drain pipe properly finally.




Drain pump operation


In case electrical wiring work finished
Drain pump can be operated by remote controller (wired).
For the operation method, refer to Operation for drain pump in the installation manual for wiring work.
In case electrical wiring work not finished

Drain pump will run continuously when the dip switch "SW7-1" on the indoor unit PCB is turned ON, the Connector CNB is disconnected, and then the power supply (230VAC on the terminal block ① and ②) is turned ON. Make sure to turn OFF "SW7-1" and reconnect the Connector CNB after the test.

(h) Wiring-out position and wiring connection

- Electrical installation work must be performed according to the installation manual by an electrical installation service provider qualified by a power provider of the country, and be executed according to the technical standards and other regulations applicable to electrical installation in the country. Be sure to use an exclusive circuit.
- Use specified cord, fasten the wiring to the terminal securely, and hold the cord securely in order not to apply unexpected stress on the terminal.
- Do not put both power source line and signal line on the same route. It may cause miscom-munication and malfunction.
- Be sure to do D type earth work.
- For the details of electrical wiring work, see attached instruction manual for electrical wiring work.
- 1) Remove a lid of the control box (3 screws) and the wiring cover (2 screws).
- 2) Hold each wiring inside the unit and fasten them to terminal block securely.
- 3) Fix the wiring with clamps.
- 4) Install the removed parts back to original place.




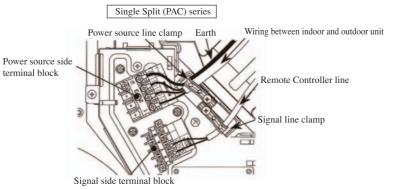

(i) How to check the dirt of drain pan (Maintenance)


The method of checking the dirt of drain pan

- It is possible to check the dirt for inlet of drain pan without detaching the panel. (Inspection is not possible when the high efficient filter and option spacer is installed.)
- 1) Open the air return grille and remove the panel corner cover on drain pan side.
- 2) Remove the cover of inspection window. (1screw)
- 3) Check the drain pan from the inspection window.
- If the drain pan is very dirty, remove the drain pan and clean it.
- 4) After checking of the dirty of drain pan, restore the cover of the inspection window securely. Improper restoration of the cover may cause dew condensation and water leakage.
 Available checking part



Attention for removing drain pan

• The fixing components have been attached the with drain pan. Pay attention to these components during installation and removing. Take off the hanging hook after removing four screws. During the installation of drain pan, fix the drain pan firmly by using four screws after hanging it up with the fixing hook.

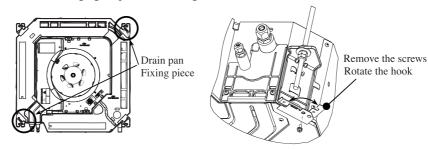

(j) Panel installation

1) Before installation

- Follow installation manual carefully, and install the panel properly.
- Check the following items.
 - Accessories

Accessories

Bolt	4 pieces	For panel installation
Strap	 4 pieces	For avoiding the corner panel from falling

Note: Accessories are laid in the position removing the corner panel.

2) Checking the indoor unit installation position

- Read this manual together with the air conditioner installation manual carefully.
- Check if the opening size for the indoor unit is correct with the level gauge supplied in the indoor unit.
- Check if the gap between the ceiling plane and the indoor unit is correct by inserting the level gauge into the air outlet port of the indoor unit. (See below drawing)
- Adjust the installation elevation if necessary.

Caution

If there is a height difference beyond the design limit between the installation level of the indoor unit and the ceiling plane, the panel may be subject to excessive stress during installation, it may cause distortion and damage.

• The installation level of the indoor unit can be adjusted finely from the opening provided on the corner, even after panel is attached. (Refer **6**) Attaching the panel to for details.)

3) Removing the air return grille

- a) Hold the stoppers on the air return grille (2 pieces) toward OPEN direction, open the air return grille.
- b) Remove the hooks of the air return grille from the decorative panel while it is in the open position.

4) Removing a corner panel

• Pull the corner panel toward the direction indicated by the arrow and remove it. (Same way for all four corner panels)


5) Orientation of the panel installation


- Take note that there is an orientation to install the panel.
- Attach the panel with the orientation shown on the right.
- Align the "PIPE SIDE" mark (on the panel) with the refrigerant pipes on the indoor unit.
- Align the "DRAIN" mark (on the panel) with the drain pipe on the indoor unit.

Caution


In case the orientation of the panel is not correct, it will lead to air leakage and also it is not possible to connect the louver motor wiring.


Accessories holding position















6) Attaching the panel


- a) Temporary attaching
 - Lift up the hanger (2 places) on the panel for temporary support.
 - Hang the panel on the hook on the indoor unit.

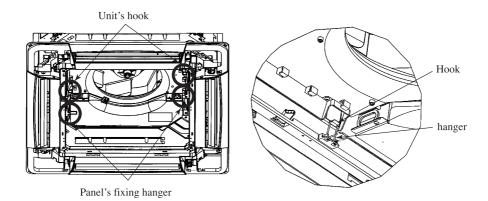


- b) Fix the panel on the indoor unit
 - Fasten the panel on the indoor unit with the four bolts supplied with the panel.

Caution


• Improperly tightened hanging bolts can cause the problems listed below, so make sure that you have tightened them securely.



• If there is a gap remaining between the ceiling and the decorative panel even after the hanging bolts are tightened, adjust the installation level of the indoor unit again.



• It is possible to adjust the installation height of the indoor unit with the panel attached as long as there is no influence on the drain pipe inclination and/or the indoor unit levelness.




- To adjust finely, please turn a nut fastening the indoor unit using a spanner or similar tool from the opening on the corner

Caution

Make sure there is no stress given on the panel when adjusting the height of the indoorunit to avoid unexpected distortion. It may cause the distortion of panel or failing to close the air return grille.


7) Electrical wiring

- a) After removing three screws of control box, detach the cover of control box (the hatched part).
- b) Connect the connector for louver motor (white 20P).
 - Hold the wiring by using the clamps of the indoor unit.
 - Hold the connector inside the control box.

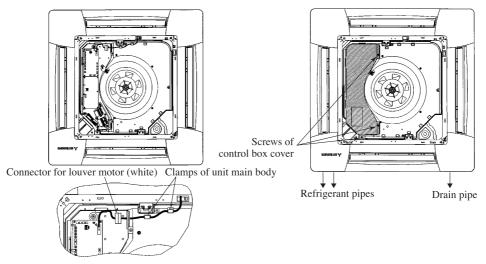


8) Attaching a corner panel

- a) To avoid unexpected falling of the corner panel, put the strap onto the corner panel's pin with turning the strap up.
- b) Then hang the strap of a corner panel onto the decorative panel's pin.
- c) First insert the part "a" of a corner panel into the part "A" of the decorative panel, and then engage four hooks.



9) If it is necessary to fix the louver position manually, follow the procedure mentioned below.

- a) Shut off the main power switch.
- b) Unplug the connector of the louver motor which you want to fix the position. Make sure to insulate unplugged connectors electrically with a vinyl tape.
- c) Adjust the louver position slowly by hand so as to be within the applicable range mentioned below table.

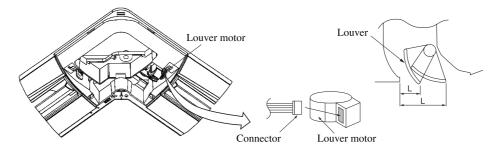

|--|

Vertical airflow direction	Horizontal 0°	Downwards 45°
Dimension L (mm)	43	26
* It can be set between 26 12mm freely		

It can be set between 26 ~ 43mm freely.

Caution


- Any automatic control or operation from the remote controller will be disabled on the louver whose position is fixed in the above way.
- Do not set a louver beyond the specified range. Failure to observe this instruction may result in dripping, dew condensation, the fouling of the ceiling and the malfunctioning of the unit.

10) Attaching the air return grille

There is no orientation on attaching the air return grille onto the panel.

- To attach the air return grille, follow the procedure described in **3 Removing the air return grille** in the reverse order.
- 1. Hang the hooks of the air return grille in the hole of the panel. (The hooks of the grille can be hanged in any four side of the panel.)
- 2. After the grille is hanged, close the grille while the stoppers on the grille (2 pieces) are kept pressed to "OPEN" direction. When the grille comes to the original position, release the stoppers to hold the grille. Make sure to hear the sound of "CLICK" in both stoppers.

<Installation>

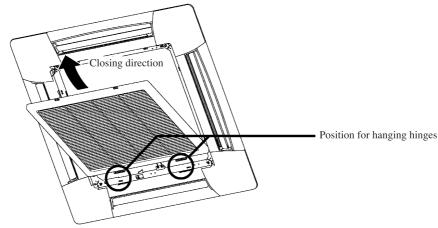

Caution

- Attaching the air return grille from the hinge side.
- Be careful in air return grille attaching, unstable attaching may cause grille falling.
- Repair or replace the distorted, broken stopper at once, or the grille falling may occur.

(3) Ceiling suspended type (FDEN)


(a) Selection of installation location

1) A place where good air circulation and delivery can be obtained.

Cold air throw Unit : m				
Model	FDEN40, 50	FDEN60, 71	FDEN100, 125, 140	
Air throw	7.5	8	9	

Conditions

- (1) Installation height: $2.4 \sim 3.0$ m above the floor
- (2) Fan speed: Hi
- (3) Location: Free space without obstacles
- (4) Distance of reach indicates the horizontal distance after the wind touched down the floor.
- (5) Air velocity at the throw: 0.5 (m/sec.)
- 2) A place where ceiling has enough strength to support the unit.
- 3) A place where there is no obstruction to the return air return and supply air supply ports.
- Places exposed to oil splashes or steam (e.g. kitchens and machine plants). Installation and use at such places will incur deteriorations in the performance or corrosion with the heat exchanger or damage in molded synthetic resin parts.
- 5) A place where the space shown below may be secured.

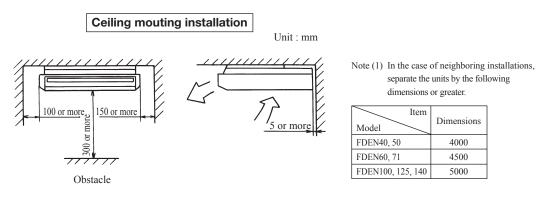


6) This unit uses a microcomputer as a control device. Therefore avoid installing the unit near the equipment that generates strong electromagnetic waves and noise.

(b) Wireless remote control unit operation distance.

1) Standard signal receiving range.

[Condition] Illuminance at the receiver area: 360 lux.

(When no lighting fixture is located with in 1 m of indoor unit in an ordinary office)




2) Points for attention in connecting a plural number of indoor units.

[Condition] Illuminance at the receiver area: 360 lux.

(When no lighting fixture is located within 1 m of indoor unit in an ordinary office)


When the remote control unit is used with the aforementioned interference-prevention setting, a minimum distance guaranteening the prevention of unintended unit responses is 5 m.




- a) Please operate remote control unit switches with the unit faced correctly toward the indoor unit's receiver section.
- b) Effective operation distance can vary with the luminance around the receiver and the reflection from walls of the room.
- c) When the receiver is exposed to intensive light such as from the direct sun or a strong light, it may become operable only from a short distance or unable to receive signals at all.

(c) Installation preparation


1) Remove the air return grille. Slide the stoppers (4 places).






2) Remove the side panels.

Take out the screws, then slide the side panels in the arrow direction to remove them.



3) Remove the suspension lug.


Take out the screws, then loosen the installation bolt.




4)

Suspension bolt position


 a) Using the paper pattern supplied as an accessory as a criterion, select suspension bolt positions and piping hole positions, then install the suspension bolts and make holes for piping. After positioning, remove the paper pattern.






b) Keep strictly to the suspension bolt lengths speci-


fied below.






(d) Installation

1) Fasten the suspension lugs to the suspension bolts.

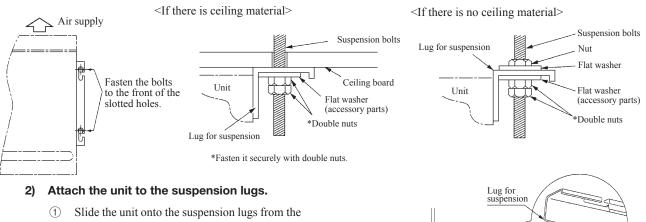


- front, hanging it on the bolts.
- ② Fasten the unit securely on the left and right sides with 4 suspension bolts (M8).
- ③ Tighten the 2 screws (M4) on the left and right sides.



3) In order to make it easier for water to drain out, install the unit so that the water drain side slopes downward.

Left-right direction


• Front-rear direction



 \triangle If the slope is reversed, there is danger of water leaking out.

(e) Refrigerant piping


1) Piping position



2) Piping connection position

Piping can be connection from 3 different directions. Remove the cutout from hole where the piping will be connected using side cutters or similar tool. Cut a hole for the piping connection in the back cover according to the cutting margin shown. Cut a hole in the ceiling side in accordance with the position of the piping. Also, after the piping is installed, seal the space around the piping with putty, etc. to keep dust from getting inside the unit.

(In order to prevent damage to wires from the edges, be sure to use the back cover.)




(f) Drain piping

- 1) Drain piping can be connected from the back, right and left sides.
- 2) When installing drain piping, be sure to use the insulating material supplied for the drain hose and drain hose clamp.
 - a) Connect the drain hose fully all the way to the base of the fitting.
 - b) Fasten the hose securely with the drain hose clamp.
 - c) Keep strictly within the lengths specified below for the suspension bolts.
- 3) If drain piping is installed on the left side, change the rubber plug and insulating material (tubular) from the left side piping connection port to the right side.

Be careful that water doesn't pour out when the drain plug is removed.


WARNING

Use the fitting supplied with the unit to connect the drain hose, fastening it at the lowest point so that there is no slack, and establishing a 10 mm drain slope. * Keep electrical wiring from running beneath the drain hose.



 \triangle Be sure to fasten the drain hose down with a clamp.

There is danger of water overflowing the drain hose.



After piping has been installed, check to make sure water drains well and that there is no overflow.

(4) Duct connected-Middle static pressure-type (FDUM)

(i) Selection of installation location

- 1) Avoid installation and use at those places listed below.
 - a) Places exposed to oil splashes or steam (e.g. kitchens and machine plants). Installation and use at such places will incur deteriorations in the performance or corrosion with the heat exchanger or damage in molded synthetic resin parts.
 - b) Places where corrosive gas (such as sulfurous acid gas) or inflammable gas (thinner, gasoline, etc.) is gnerated or remains. Installation and use at such places will cause corrosion in the heat exchanger and damage in molded synthetic resin parts.
 - c) Places adjacent to equipment generating electromagnetic waves or high-frequency waves such as in hospitals. Generated noise may cause malfunctioning of the controller.
- 2) Select places for installation satisfying the following conditions and, at the same time, obtain the consent on the part of your client user,
 - a) Places where chilled or heated air circulates freely. When the installation height exceeds 3m, warmed air stays close to the ceiling. In such cases, suggest your client users to install air circulators.
 - b) Places where perfect drainage can be prepared and sufficient drainage gradient is available.
 - c) Places free from air disturbances to the return air port and supply hole of the indoor unit, places where the fire alarm may not malfunction to short circuit.
 - d) Areas where dew point is lower than around 28°C and relative humidity is lower than 80%.


/ This indoor unit is tested under the condition of ISO high humidity condition and confirmed there is no problem. However, there is some risk of condensation drop if the air conditioner is operated under the severer condition than mentioned above.

If there is a possibility to use it under such a condition, attach additional insulation of 10 to 20mm thick

for entire surface of indoor unit, refrigeration pipe and drain pipe.

3) Check if the selected place for installation is rigid enough to stand the weight of thew unit.

Otherwise, apply reinforcement using boards and beams before starting the installation work.




		Unit : mm
Mark	Α	В
FDUM50V	1100	600
FDUM60V, 71V	1300	600
FDUM100V ~ 140V	1720	600

TT -

(ii) Suspension


Be sure to observe the finished length of the suspension bolts given below.




	Unit : mm
Mark	А
FDUM50V	786
FDUM60V, 71V	986
FDUM100V ~ 140V	1406

1) Fixing the suspension bolt (customer ordered parts M10)

Securely fix the suspension bolt as illustrated below or in another way.






2) Adjusting the unit's levelness

- a) Adjust the out-levelness using a level vial or by the following method.
 - Make adjustment so that the relation between the lower surface of the indoor unit proper and water level in the hose

becomes given below.



Bring the piping side slightly lower

b) Unless the levelness is adjusted properly, the malfunction of the float switch will occur.

3) Blower fan tap switch

The following two methods are available in switching the blower fan

tap. Switch to the high-speed tap with one of these methods.

- 1 Set SW9-4 provided on the indoor unit PCB to ON.
- ② By means of function setting from the remote control unit, set the setting ⓒ of "I/U FUNCTION ▲" (indoor unit function) to "Hi CEILING 1" (high-speed tap) as shown right.

For the details of operating procedures, please refer to the installation manual of your remote control unit.

(iii) Duct work


1 Supply air duct

• 2-spot, 3-spot and 4-spot with ø200 type duct are the standard specifications. Determine the number of spots based on following table.

FDUM50V	FDUM60V, 71V	FDUM100V ~ 140V
2-spot	$2 \sim 3\text{-spot}^{(1)}$	$3 \sim 4\text{-spot}^{(2)}$

Notes (1) Shield the central supply air port for 2-spot.

- (2) Shield the supply air port around the center for 3-spot.
- Limit the difference in length between spots at less than 2:1.
- · Reduce the length of duct as much as possible.
- Reduce the number of bends as much as possible. (Corner R should be as larger as possible.)



2 Access door

Access door must be provided without fail.

- Dimensions of access door and service space
 - (See exterior dimensions in page 93 to 95.)

Function number	Function description (B)	Setting
01	Hi CEILING SET	Hi CEILING

Fan control,standard

Fan control, high speed (High ceiling)


ON

OFF


SW9-4

③ Return air port

- When shipped, the return air port lies on the back.
- When connecting the duct to the return air port, remove the air filte if it is fitted to return air port.
- When placing the return air port to carry out suction from the bottom side, use the following procedure to replace the return air duct joint and the bottom plate.



• Remove the screws which fasten the bottom plate and the duct joint on the return air port of the unit.




• Replace the removed bottom plate and duct joint.




• Fit the duct joint with a screw, fit the bottom plate.

- Make sure to insulate the duct to prevent dewing on it.
- ④ Install the specific supply air duct in a location where the air will circulate to the entire room.
 - The duct connection is specific to the 200 circular duct.
 - Conduct the installation of the specific supply air hole and the connection of the duct before attaching them to the ceiling.
 - Insulate the area where the duct is secured by a band for dew condensation prevention.




(5) Make sure provide an inspection hole on the ceiling. It is indispensable to service electric equipment, motor, functional components and cleaning of heat exchanger.

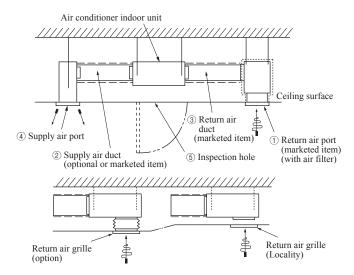

- (6) If a duct is not provided at the return air side but it is substituted with the space over the ceiling, humidity in the space will increase by the influence of capacity of ventilation fan, strength of wind blowing against the outdoor air louver, weather (rainy day) and others.
 - Moisture in air is likely to condense over the external plates of the unit and to drip on the ceiling. Unit should be
 operated under the conditions as listed in the above table and within the limitation of wind volume. When the building is a concrete strucially immediately after the construction, humidity tends to rise if the space over the ceiling is
 not substitued in place of a duct. In such occasion, it is necessary to insulate the entire unit with glass wool (25mm).
 (Use a wire net or equivalent to hold glass wool in place.)
 - It may run out the allowable limit of unit operation (Example: When ambient air temperature is 35°CD.B, return air temperature is 27°CW.B) and it could result in such troubles as compressor overload, etc..

• There is a possibility that the supply air volume may exceed the allowable range of operation due to the capacity of ventilation fan or strength of wind blowing against external air louver so that drainage from be heat exchanger may fail to reach the drain pan leak outside (e.g. drip on to the with consequential water leakage in the room.)




Notice: Aspecific cover plate is available when changing the 4 spot to the 3 spot, or when changing the 3 spot to the 2

spot. Note (1) Do not change from 2 spot to 1 spot.

Return air duct: Use square duct.

(8) Return air port with canvas duct

1) Connection of intake and exhaust ducts.



2) Duct connecting position.

< Fresh air intake >

- a) Use side air intake port.
- b) In case of simultaneous intake and exhaust, the side air intake port cannot be used, therefore, take air from the midway air intake port along the intake duct.
- < Exhaust > Make sure to use suction as well.
- c) Use a side exhaust port.

3) Duct connection


Use intake and exhaust duct flange of separately sold (for connection of ø125mm round duct) to connect ø125mm round duct. The duct clamped by bands must be thermally insulated to prevent dew condensation.

(iv) Drain piping


1) Drain piping should always be in a downhill grade (1/50-1/100) and avoid riding across an elevation or making traps.

Good piping


Improper piping




- 2) When connecting the drain pipe to the unit, pay sufficient attention not to apply excess force to the piping on the unit side. Also, fix the piping at a point as close as possible to the unit.
 Level difference part
- For drain pipe, use hard PVC general purpose pipe VP-20 which can be purchased locally. When connecting, insert a PVC pipe end securely into the drain socket before tightening securely using the attached drain hose and clamp. Adhesive must not be used connection of the drain socket and drain hose (accessory).



4) When constructing drain piping for several units, position the common pipe about 100 mm below the drain outlet of each unit as shown in the sketch below. Use VP-30 or thicher pipe for this purpose.



- 5) Be sure to provide heat insulation to hard PVC pipes of indoor placement.
- 6) Do not ever provide an air vent.
- 7) The height of the drain head may be elevated up to a point 600 mm from the bottom of unit and, when an obstacle exists in the ceiling space, elevate the piping to avoid the obstacle using an elbow or corresponding gadget. When doing this, if the stretch for the needed height is too high, the back-flow quantity of drain at the time of interruption of the operation gets too much and it may cause overflow at the drain pan. Therefore, make the height of the drain pipe within the distance given in the drawing below.



 Avoid positioning the drain piping outlet at a place where generation of odor may stimulated. Do not lead the drain piping direct into a sewer from where sulfur gas may generate.

9) Drainage test

- a) During trial operation, make sure that drainage is properly execued and check that leakage is not found at connections.
- b) Be sure to carry out a drainage test when installing the system during a heating season.
- c) When installing the system in a building under construction, carry out the drainage test before ceiling tiles are installed.
 Insert a water filing hose by approx 50 mm and feed water. (Be sure to insert the water filing hose in a downward direction.)



- ① Supply approx 1000cc of water through the outlet of the unit using a feed water pump.
- Make sure that drainage is proceeding properly at the see-through outlet of the unit.
 * Also confirm the revolving sound of the condensate motor when checking the drainage.
- ③ Then remove the drain plug at lower section of the unit to drain water off. After making sure water is not left, restore the drain plug to the original position.

Forced drain pump operation

- Setup from a unit side.
 - \odot In case electrical wiring work finished

Drain pump can be operated by remote controller (wired).

For the operation method, refer to Operation for drain pump in the installation manual for wiring work.

○ In case electrical wiring work not finished

Drain pump will run continuously when the dip switch "SW7-1" on the indoor unit PCB is turned ON, the Connector CNB is disconnected, and then the power supply (230VAC on the terminal block ① and ②) is turned ON. Make sure to turn OFF "SW7-1" and reconnect the Connector CNB after the test.

• Setup from a remote controller side.

Drain pump operation from remote control unit is possible. Operate a remote control unit by following the steps described below.

1. To start a forced drain pump operation.

- ① Press the TEST button for three seconds or longer.
 - The display will change " *** TEST RUN T** "
- O Press the V button once and cause "RAINPUP \clubsuit " to be displayed.

③ When the O (SET) button is pressed, a drain pump operation will start. Display: "O NSTOP"

2. To cancel a drain pump operation.

- ① If either O (SET) or OON/OFF button is pressed, a forced drain pump operation will stop. The air conditioning system will become OFF.
- O If two (2) remote controllers are connected to one (1) inside unit, only the master controller is available for trial operation and confirmation of operation data. (The slave remote controller is not available.)


10) Drainage from the lower drain socket


Only if the drain pipe can be installed in a downhill grade (1/50-1/100), the lower drain socket can be used for connecting to the drain pipe as illustrated.

(Disconnect the connector for the drain motor)

As shown in the sketch to the right, disconnect the drain motor connector CnR (blue color coding).

If the system is started with this connector connected as is, drain water is discharged out of the upper drain socket causing a heavy water lekage.





(5) Duct connected-High static pressure-type (FDU)

♦ Model FDU 71V ~ 140V

- (a) Selection of installation location
 - 1) Select the suitable areas to install the unit under approval of the user.
 - Areas where the indoor unit can deliver hot and cold wind sufficiently. Suggest to the user to use a circulator if the ceiling height is over 3m to avoid warm air being accumulated on the ceiling.
 - Areas where there is enough space to install and service.
 - Areas where it can be drained properly. Areas where drain pipe descending slope can be taken.
 - Areas where there is no obstruction of airflow on both air return grille and air supply port.
 - Areas where fire alarm will not be accidentally activated by the air conditioner.
 - Areas where the supply air does not short-circuit.
 - Areas where it is not influenced by draft air.
 - Areas not exposed to direct sunlight.
 - Areas where dew point is lower than around 28°C and relative humidity is lower than 80%.
 - This indoor unit is tested under the condition of ISO high humid-ity condition and confirmed there is no problem. However, there is some risk of condensa-tion drop if the air conditioner is operated under the severer condition than mentioned above.


If there is a possibility to use it under such a condition, attach additional insulation of 10 to 20mm thick for entire surface of indoor unit, refrigeration pipe and drain pipe.

- Areas where TV and radio stays away more than 1m. (It could cause jamming and noise.)
- Areas where any items which will be damaged by getting wet are not placed such as food, table wares, server, or medical equipment under the unit.
- · Areas where there is no influence by the heat which cookware generates.
- Areas where not exposed to oil mist, powder and/or steam directly such as above fryer.
- Areas where lighting device such as fluorescent light or incandescent light doesnít affect the operation. (A beam from lighting device sometimes affects the infrared receiver for the wireless remote controller and the air conditioner might not work properly.)
- 2) Check if the place where the air conditioner is installed can hold the weight of the unit. If it is not able to hold, reinforce the structure with boards and beams strong enough to hold it. If the strength is not enough, it could cause injury due to unit falling.

Space for installation and service

- Make installation altitude over 2.5m.
 - (Indoor Unit)


Installation Space



		Unit: mm
Model Mark	71	100, 125, 140
А	1200	1720

(b) Preparation before installation

- If suspension bolt becomes longer, do reinforcement of earthquake resistant.
 - For grid ceiling
 - When the suspension bolt length is over 500mm, or the gap between the ceiling and roof is over 700mm, apply earthquake resistant brace to the bolt.
 - In case the unit is hanged directly from the slab and is installed on the ceiling plane which has enough strength. When suspension bolt length is over 1000mm, apply the earthquake resistant brace to the bolt.
- Prepare four (4) sets of suspension bolt, nut and spring washer (M10) on site.

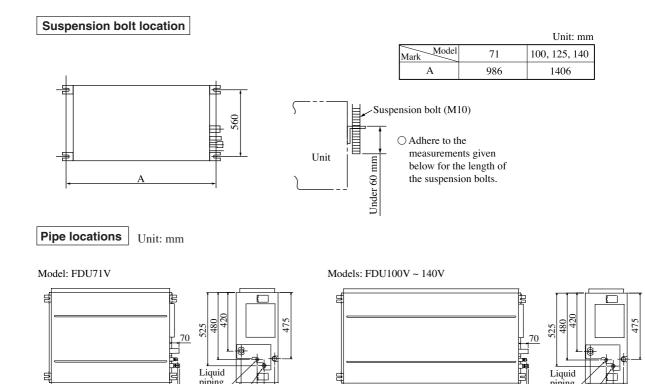

Liquid piping

Gas

piping

Drain

Drain

100

150

60

(Connectable with VP20)

(Natural drainage VP25)

77 58

10 10


28

Supply air duct



Supply air duct

Installation



25

100

150

60

Drain (Connectable with VP20)

Drain (Natural drainage VP25)

Adjustment for horizontality

• Either use a level vial, or adjust the level according to the method below.

Liquid piping

Gas


piping

58

71

199 1910

28

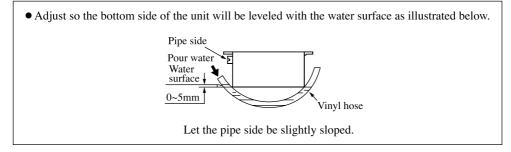


• If the unit is not leveled, it may cause malfunctions or inoperation of the float switch.


(d) Duck Work

A corrugated board (for preventing sputtering) is attached to the main body of the air conditioner (on the outlet port). Do not remove it until connecting the duct.

- ① The air conditioner main unit does not have an air filter. Incorporate it into the easy-to-clean return air grille.
- Supply air duct
 - The ducts should be at their minimum lengths.
 - Keep the bends to a minimum. (The bending radius should be as large as possible.)




- Conduct the duct work before ceiling attachment.
- ③ Return air duct
 - Make sure to insulate the duct to prevent dewing on it.
- (4) Location and form of blow outlet should be selected so that air from the outlet will be distributed all over the room, and equipped with a device to control air volume.
- (5) Make sure provide an inspection hole on the ceiling. It is indispensable to service electric equipment, motor, functional components and cleaning of heat exchanger.

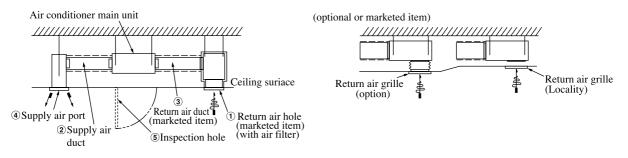

Bad example of duct work

- (1) If a duct is not provided at the suction side but it is substituted with the space over the ceiling, humidity in the space will increase by the influence of capacity of ventilation fan, strength of wind blowing against the outdoor air louver, weather (rainy day) and others.
 - a) Moisture in air is likely to condense over the external plates of the unit and to drip on the ceiling. Unit should be operated under the conditions as listed in the above table and within the limitation of wind volume. When the building is a concrete structure, especially immediately after the construction, humidity tends to rise even if the space over the ceiling is not substituted in place of a duct. In such occasion, it is necessary to insulate the entire unit with glass wool (25mm). (Use a wire net or equivalent to hold the glass wool in place.)
 - b) It may run out the allowable limit of unit operation (Example: When return air temperature is 35°C DB, supply air temperature is 27°C WB) and it could result in such troubles as compressor overload, etc..
 - c) There is a possibility that the blow air volume may exceed the allowable range of operation due to the capacity of ventilation fan or strength of wind blowing against external air louver so that drainage from be heat exchanger may fall to reach the drain pan but leak outside (Example: drip on to the ceiling) with consequential water leakage in the room.
- ② If vibration damping is not conducted between the unit and the duct, and between the unit and the slab, vibration will be transmitted to the duct and vibration noise may occur. Also, vibration may be transmitted from the unit to the slab. Vibration damping must be performed.




(e) Refrigerant pipe

Caution

- Use the new refrigerant pipe.
 - When re-using the existing pipe system for R22 or R407C, pay attention to the following items.
 - Change the flare nuts with the attached ones (JIS category 2), and reprocess the flare parts.
 - Do not use thin-walled pipes.
- Use phosphorus deoxidized copper alloy seamless pipe (C1220T specified in JIS H3300) for refrigeration pipe installation. In addition, make sure there is no damage both inside and outside of the pipe, and no harmful substances such as sulfur, oxide, dust or a contaminant stuck on the pipes.
- Do not use any refrigerant other than R410A.
 Using other refrigerant except R410A (R22 etc.) may degrade inside refrigeration oil. And air getting into refrigeration circuit may cause over-pressure and resultant it may result in bursting, etc.
- Store the copper pipes indoors and seal the both end of them until they are brazed in order to avoid any dust, dirt or water getting into pipe. Otherwise it will cause degradation of refrigeration oil and compressor breakdown, etc.
- Use special tools for R410 refrigerant.

Piping work



When conducting piping work, make sure to allow the pipes to be aligned in a straight line for at least 250 mm, as shown in the left illustration. (This is necessary for the drain pump to function)

Work procedure

- 1) Remove the flare nut and blind flanges on the pipe of the indoor unit.
 - * Make sure to loosen the flare nut with holding the nut on pipe side with a spanner and giving torque to the nut with another spanner in order to avoid unexpected stress to the copper pipe, and then remove them. (Gas may come out at this time, but it is not abnormal.)
 - Pay attention whether the flare nut pops out. (as the indoor unit is sometimes pressured.)
- 2) Make a flare on liquid pipe and gas pipe, and connect the refrigeration pipes on the indoor unit.
 - * Bend the pipe with as big radius as possible and do not bend the pipe repeatedly. In addition, do not twist and crush the pipes.
 - * Do a flare connection as follows:
 - Make sure to loosen the flare nut with holding the nut on pipe side with a spanner and giving torque to the nut with another spanner in order to avoid unexpected stress to the copper pipe, and then remove them.
 - When fastening the flare nut, align the refrigeration pipe with the center of flare nut, screw the nut for 3-4 times by hand and then tighten it by spanner with the specified torque mentioned in the table below. Make sure to hold the pipe on the indoor unit securely by a spanner when tightening the nut in order to avoid unexpected stress on the copper pipe.
- 3) Cover the flare connection part of the indoor unit with attached insulation material after a gas leakage inspection, and tighten both ends with attached straps.
 - Make sure to insulate both gas pipes and liquid pipes completely.
 - * Incomplete insulation may cause dew condensation or water dropping.


(f) Drain pipe

Caution


- Install the drain pipe according to the installation manual in order to drain properly. Imperfection in draining may cause flood indoors and wetting the household goods, etc.
- Do not put the drain pipe directly into the ditch where toxic gas such as sulfur, the other harmful and inflammable gas is generated. Toxic gas would flow into the room and it would cause serious damage to user's health and safety (some poisoning or deficiency of oxygen). In addition, it may cause corrosion of heat exchanger and bad smell.
- Connect the pipe securely to avoid water leakage from the joint.
- Insulate the pipe properly to avoid condensation drop.
- Check if the water can flow out properly from both the drain outlet on the indoor unit and the end of the drain pipe after installation.
- Make sure to make descending slope of greater than 1/100 and do not make up-down bend and/or trap in the midway. In addition, do not put air vent on the drain pipe. Check if water is drained out properly from the pipe during commissioning. Also, keep sufficient space for inspection and maintenance.

Work procedure


- 1) Insert the supplied drain hose (the end made of soft PVC) to the step of the drain socket on the indoor unit and fix it securely with the clamp.
 - Do not apply adhesives on this end.
 - Do not use acetone-based adhesives to connect to the drain socket.

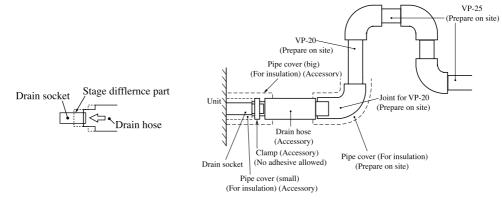


- 2) Prepare a joint for connecting VP-20 pipe, adhere and connect the joint to the drain hose (the end made of rigid PVC), and adhere and connect VP-20 pipe (prepare on site).
 - * As for drain pipe, apply VP-20 made of rigid PVC which is on the market.
 - Make sure that the adhesive will not get into the supplied drain hose.
 - It may cause the flexible part broken after the adhesive is dried up and gets rigid.
 - The flexible drain hose is intended to absorb a small difference at installation of the unit or drain pipes. Intentional bending, expanding may cause the flexible hose broken and water leakage.



- 3) Make sure to make descending slope of greater than 1/100 and do not make up-down bend and/or trap in the midway.
 - Pay attention not to give stress on the pipe on the indoor unit side, and support and fix the pipe as close place to the unit as possible when connecting the drain pipe.
 - Do not set up air vent.




• When sharing a drain pipe for more than one unit, lay the main pipe 100mm below the drain outlet of the unit. In addition, select VP-30 or bigger size for main drain pipe.



- 4) Insulate the drain pipe.
 - Be sure to insulate the drain socket and rigid PVC pipe installed indoors otherwise it may cause dew condensation and water leakage.
 - * After drainage test implementation, cover the drain socket part with pipe cover (small size), then use the pipe cover (big size) to cover the pipe cover (small size), clamps and part of the drain hose, and fix and wrap it with tapes to wrap and make joint part gapless.

Drain up

• The position for drain pipe outlet can be raised up to 600mm above the ceiling. Use elbows for installation to avoid obstacles inside ceiling. If the horizontal drain pipe is too long before vertical pipe, the backflow of water will increase when the unit is stopped, and it may cause overflow of water from the drain pan on the indoor unit. In order to avoid overflow, keep the horizontal pipe length and offset of the pipe within the limit shown in the figure below.



Joint for VP20 (local procurement)


Otherwise, the construction point makes it same as drain pipe construction.

Drain test

- \bigcirc Conduct a drain test after completion of the electrical work.
- ② During the trail, make sure that drain flows properly through the piping and that no water leaks from connections.
- (3) In case of a new building, conduct the test before it is furnished with the ceiling.
- ④ Be sure to conduct this test even when the unit is installed in the heating season.

Procedures

- ① Supply about 1000 cc of water to the unit through the air outlet by using a feed water pump.
- 2 Check the drain while cooling operation.

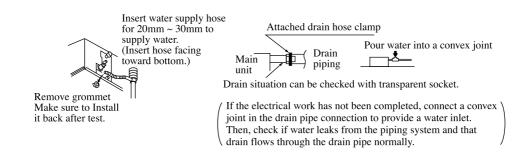

Outline of bottom drain piping work


• If the bottom drain piping can be done with a descending gradient (1/50-1/100), it is possible to connect the pipes as shown in the drawing below.

Connecting port of top drain pipe Standard hard polyvinyl chloride pipes Rubber stopper (to be removed)

Uncoupling the drain motor connector

• Uncouple the connector CNR for the drain motor as illustrated in the drawing on the right.

Note: If the unit is run with the connector coupled, drain water will be discharged from the upper drain pipe joint, causing a water leak.



Drain pump operation

- In case electrical wiring work finished
 - Drain pump can be operated by remote controller (wired).

For the operation method, refer to Operation for drain pump in the installation manual for wiring work.

In case electrical wiring work not finished

Drain pump will run continuously when the dip switch "SW7-1" on the indoor unit PCB is turned ON, the Connec-tor CNB is disconnected, and then the power supply (230VAC on the terminal block ① and ②) is turned ON. Make sure to turn OFF "SW7-1" and reconnect the Connector CNB after the test.

(g) Tap selection on blower unit (when the high peformance filter is used)

The fan tap's factory setting is "Standard" If you want to change it to the high static-pressure setting, you can avail yourself of the following two methods. Use one of the two methods to set the fan tap.

Make sure to perform the functional setting with remote controller.

Select [Indoor function] in the functional setting mode, and change the function number [01] [High wall setting].

For operation method, refer to the user's manual of the remote controller.

Function number A Functional content		Setting content C	Default setting
01	TT:-111	Standard	0
01	High wall setting	High wall 1	


		UNIT: Pa
Static	Standard Tap	50
Pressure	High Tap	130

- Taps should not be used under static pressure outside the unit mentioned above. Dew condensation may occur with the unit and wet the ceiling or furniture.
- Do not use under static pressure outside the unit of 50Pa or less. Water drops may be blown from the diffuser outlet of the unit and wet the ceiling or furniture.

Model FDU200V, 250V

(a) Selection of installation location

1) Install the unit at a place as shown below and which meets the conditions as shown by the following table.



Air conditions, limitation of air volume

Air volume (m3/min) Operating tempreature range Ambient temperature around indoor unit Rating Lower limit Upper limit Cooling Heating FDU200V 51/60 38/45 65/66 Refer to the 88 page for details Dew point temperature below 28°C FDU250V 68/80 51/60 87/88

(50/60Hz)

2) Places where perfect drainage can be prepared and sufficient drainage gradient is available.

3) Places free from air disturbances to the return air and supply air of the indoor unit.

4) Areas where dew point is lower than around 28°C and relative humidity is lower than 80%.

This indoor unit is tested under the condition of ISO high humidity condition and conthere is no problem. However, there is some risk of condensation drop if the air conditioner is operated under the severer condition than mentioned above.

If there is a possibility to use it under such a condition, attach additional insulation of 10 to 20mm thick

for entire surface of indoor unit, refrigeration pipe and drain pipe.

- Do not place where the unit is exposed to oil splashes or steam (e.g. kitchens and machine plants). (Installation and use at such places will cause the performance drop, corrosion in the heat exchanger and damage in molded synthetic resin parts.)
- 6) Do not place where corrosive gas (such as sulfurous acid gas) or inflammable gas (thinner, gasoline, etc.) is generated or remains.


Installation and use at such places will cause corrosion in the heat exchanger and damage in molded synthetic resin parts.

7) Do not place adjacent to equipment generating electromagnetic waves or high-frequency waves such as in hospitals, Generated noise may cause malfunctioning of the controller.

(b) Installation

<Delivery>


- When delivering the package, move the package to the installation as close as possible.
 When it is unpacked and then moved
 - to the installation place, sufficient care must be taken not to damage the unit during transfer.



 To adjust the level, use a level gauge or adjust as shown by the left figure.
 Note: Unless the level is adjusted properly, the float switch may malfunction or



(c) Duct work



- - Water in Vinyl hole

<Securing of Hanging Bolt>

Steel reinforcement

of following methods.

150~160mm

Insert

Secure the hanging bolts by either one

Hole-in anchor

Hole-in plug

Adjust the piping side a little lower than the opposite side.

- Air filter is not installed in the main unit of air conditioner. Air filter should be installed in the return air grill which allows an ample access for cleaning.
- Silencer chamber(s) may be necessary depending on the noise level allowed in the room where the air conditioner is installed.
 Additional silencer may be necessary where a particularly low noise is required.
 (Provision of silencer is a must at offices and a meeting room.)
- ③ In order not to transmit vibration from the main unit of air conditioner to the ceiling or slab, it is necessary to provide means to prevent vibration, for example, a canvas coupling on the duct or rubber cushion on the main unit of air conditioner.

<Packing hardware>

used

Packing hardware (4 pcs.)

Four pieces of packing hardware are


 $0\sim 5\;mm$

After removing the hardware, retighten the screws.

(For securing of duct flange)

Discard them after unpacking.

- (4) A damper to control air volume should be installed on the joint of OA duct to facilitate control of air capacity after the installation.
- (5) Location and from of blow outlet should be selected so that air from the outlet will be distributed all over the room, and equipped with a device to control air volume.
- (6) Make sure to provide an inspection hole on the ceiling. It is indispensable to service electric equipment, motor, functional components and cleaning of heat exchanger.
- ⑦ Make sure to insulate the duct to prevent dewing on it. Thickness of insulating material is 65 mm minimum.



1 If a duct is not provided at the suction side but it is substituted with the space over the ceiling, humidity in the space will increase by the influence of capacity of ventilation fan, strength of wind blowing against the outdoor air louver, weather (rainy day) and others.

- a) Moisture in air is likely to condense over the external plates of the unit and to drip on the ceiling.
 - Unit should be operated under the conditions as listed in the above table and within the limitation of wind volume.

When the building is a concrete structure, especially immediately after the construction, humidity tends to rise even if the space over the ceiling is not substituted in place of a duct.


In such occasion, it is necessary to insulate the entire unit with glass wool (25 mm).

- (Use a wire net or equivalent to hold the glass wool in place.)
- b) It may run out the allowable limit of unit operation (Example: When return air temperature is 35°CDB, supply air temperature is 27°CWB) and it could result in such troubles as compressor overload, etc.
- c) There is a possibility that the blow air volume may exceed the allowable range of operation due to the capacity of ventilation fan or strength of wind blowing against external air louver so that drainage from the heat exchanger may fail to reach the drain pan but leak outside (e.g. drip onto the ceiling) with consequential water leakage in the room.
- ② Unless vibration isolation is provided between the unit and duct and between the unit and the slab, vibration will be transmitted to the duct so that vibration noise may generate from between the ceiling and blow outlet or vibration may be transmitted to the slab. Make sure to provide an effective vibration prevention means.


		nd a side of du med to be FDI				Duct form	Square duct
			nditioner	7		Air Item volume	Dimensions
	<u> </u>	A indoor				m ³ /h(m ³ /min)	(mm×mm
Û		4800 m³/h /	With air filter			100	250×60
						200	250×90
L						300	250×120
	\sum	Supply A	4800 m³/h			400	250×140
1000 M B	$200 \text{ m}^{3/\text{h}}$	(supply air)	4000 111/11			500	250×170
1.	200 111/11	chamber			Section (B)	600(10)	250×190
					0	800	250×230
						1.000	250×270
			Coloula	tion of dust registeres		1,000	230 ~ 270
			○ Calcula	tion of duct resistance		-1,200(20)	
			 Calcula (Use following) 	tion of duct resistance llowing simplified calculations.)		,	250×310
	Air	Duct	(Use fo	llowing simplified calculations.)	ا ۱	-1,200(20)	250×310 250×350
	Air	Duct (mm × mm)	(Use fol	Calculate based on 1 Pa]	-1,200(20) 1,400	250×310 250×350 250×390
	Air volume	Duct (mm × mm)	(Use fol Linear pipe section	Calculate based on 1 Pa per 1 m in length 1 Pa/m.]	1,200(20) 1,400 1,600 1,800(30) 2,000	250×310 250×350 250×390 250×430 250×470
	volume	(mm × mm)	(Use fol Linear pipe section Curved pipe	Ilowing simplified calculations.) Calculate based on 1 Pa per 1 m in length 1 Pa/m. Take a curved section as equivalent to 3	Section (A)	- 1,200(20) 1,400 1,600 1,800(30)	$250 \times 310 \\ 250 \times 350 \\ 250 \times 390 \\ 250 \times 430 \\ 250 \times 470 \\ 250 \times 560 \\ $
Section (A)	volume 4800m ³ /h		(Use fol Linear pipe section Curved pipe section	Ilowing simplified calculations.) Calculate based on 1 Pa per 1 m in length 1 Pa/m. Take a curved section as equivalent to 3 ~4 m in straight line.	Section	1,200(20) 1,400 1,600 1,800(30) 2,000 2,400(40) 3,000(50)	$\begin{array}{c} 250 \times 310 \\ 250 \times 350 \\ 250 \times 390 \\ 250 \times 430 \\ 250 \times 470 \\ 250 \times 560 \\ 250 \times 650 \end{array}$
Section (A)	volume	(mm × mm)	(Use fol Linear pipe section Curved pipe section Blowout	Ilowing simplified calculations.) Calculate based on 1 Pa per 1 m in length 1 Pa/m. Take a curved section as equivalent to 3	Section	1,200(20) 1,400 1,600 1,800(30) 2,000 2,400(40) 3,000(50) 3,500	$\begin{array}{c} 250 \times 310 \\ 250 \times 350 \\ 250 \times 390 \\ 250 \times 430 \\ 250 \times 470 \\ 250 \times 560 \\ 250 \times 650 \\ 250 \times 650 \\ 250 \times 740 \end{array}$
Section (A)	volume 4800m ³ /h	(mm × mm)	(Use fol Linear pipe section Curved pipe section Blowout section	Ilowing simplified calculations.) Calculate based on 1 Pa per 1 m in length 1 Pa/m. Take a curved section as equivalent to 3 ~4 m in straight line. Calculate based on 25 Pa.	Section	- 1,200(20) 1,400 1,600 1,800(30) 2,000 2,400(40) 3,000(50) 3,500 4,000	$\begin{array}{c} 250 \times 310\\ 250 \times 350\\ 250 \times 390\\ 250 \times 430\\ 250 \times 470\\ 250 \times 560\\ 250 \times 650\\ 250 \times 650\\ 250 \times 740\\ 250 \times 830\\ \end{array}$
	volume 4800m ³ /h (80m ³ min)	(mm × mm)	(Use fol Linear pipe section Curved pipe section Blowout	Ilowing simplified calculations.) Calculate based on 1 Pa per 1 m in length 1 Pa/m. Take a curved section as equivalent to 3 ~4 m in straight line.	Section	- 1,200(20) 1,400 1,600 1,800(30) 2,000 2,400(40) 3,000(50) 3,500 4,000 4,500	$\begin{array}{c} 250 \times 310\\ 250 \times 350\\ 250 \times 390\\ 250 \times 430\\ 250 \times 470\\ 250 \times 560\\ 250 \times 650\\ 250 \times 740\\ 250 \times 830\\ 250 \times 920\\ \end{array}$
Section (A)	volume 4800m ³ /h (80m ³ min) 1200m ³ /h	(mm × mm)	(Use fol Linear pipe section Blowout section Chamber	Ilowing simplified calculations.) Calculate based on 1 Pa per 1 m in length 1 Pa/m. Take a curved section as equivalent to 3 ~4 m in straight line. Calculate based on 25 Pa.	Section	- 1,200(20) 1,400 1,600 1,800(30) 2,000 2,400(40) 3,000(50) 3,500 4,000	$\begin{array}{c} 250 \times 310\\ 250 \times 350\\ 250 \times 390\\ 250 \times 430\\ 250 \times 470\\ 250 \times 650\\ 250 \times 650\\ 250 \times 740\\ 250 \times 830\\ 250 \times 920\\ 250 \times 950\\ \end{array}$
	volume 4800m ³ /h (80m ³ min)	(mm × mm) 250 × 950	(Use fol Linear pipe section Curved pipe section Blowout section	Ilowing simplified calculations.) Calculate based on 1 Pa per 1 m in length 1 Pa/m. Take a curved section as equivalent to 3 ~4 m in straight line. Calculate based on 25 Pa.	Section	- 1,200(20) 1,400 1,600 1,800(30) 2,000 2,400(40) 3,000(50) 3,500 4,000 4,500	$\begin{array}{c} 250 \times 310\\ 250 \times 350\\ 250 \times 390\\ 250 \times 430\\ 250 \times 470\\ 250 \times 560\\ 250 \times 650\\ 250 \times 740\\ 250 \times 830\\ 250 \times 920\\ \end{array}$


(d) **Drain Piping**

1) Drain piping should always be in a downhill grade (1/50~1/100) and avoid riding across an elevation or making traps.

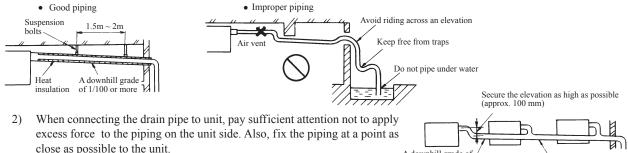

- A downhill grade of For drain pipe, use hard PVC general purpose pipe VP-25(I.D.1") which can 3) be purchased locally.
- 4) When constructing drain piping for several units, position the common pipe about 100 mm below the drain outlet of each unit as shown in the sketch. Use VP-30 (11/4") or thicker pipe this purpose.
- Be sure to provide heat insulation to hard PVC pipes of indoor placement. 5)
- Do not ever provide an air vent. 6)
- 7) Avoid postitioning the drain piping outlet at a place where generation of odor may be stimulated. Do not lead the drain piping direct into a sewer from where sulfur gas may generate.






Example: If the pressure loss at the return air side, such as the suction grill, air filter and duct, is 100 Pa, the level of drain water will rise approx. 10 mm higher than the state of operation stop.

<Provision of trap>

1/100 or more




ssure of blower H₂=1/2 H₁ or $50 \sim 100 \text{ mm}$

V P 30

(e) Drain Test

When the drain piping work is over, inject water to inspect if the piping is arranged properly or not.

 Remove the side panel and supply gradually 1,000 cc of water to see if water is drained smoothly or not. Check also for water leakage.



(f) The fan controller kit for high static pressure duct. (Optional)

The way of installing the optional fan controller for high static pressure ducts. Install the controller in accordance with the following procedure.


WARNING


- Consult your dealer for the installation of the controller.
- O Only qualified electrician must install the controller.
- ③ Remove the control box before the installation.
 - Before installing the product, take it out from the package and place it on the floor.
- 4 Be sure to turn off the power supply during installation.
 - Unless the above precautions are observed, it could cause electrical shocks or fire.

1) Applicable models and corresponding fan controller kit

Model	FDU200V,250V		
Fan controller kit	U–FCRA (PJZ006A102A)		

2) Component parts list

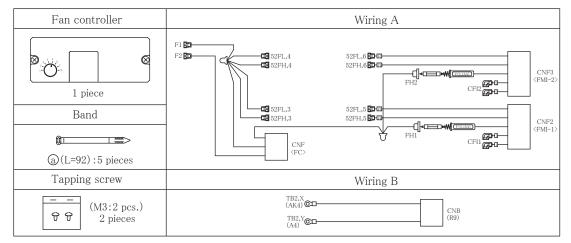

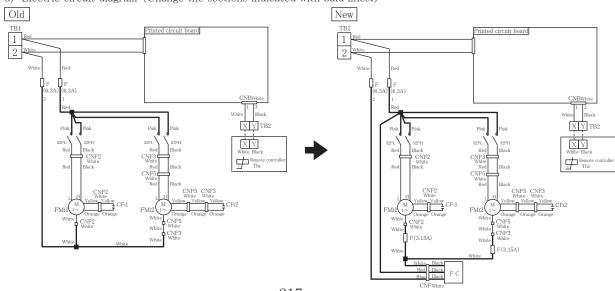

3) Electric circuit diagram (Change the sections indicated with bald lines.)


<Precautions for wiring>

- Connect wires correctly as shown by the electric wiring diagram. Be sure to tighten set screws firmly to prevent them generating heat or causing other troubles after becoming loose.
- Number of wires connected to the terminal block must be 2 wires or less. Never connect 3 or more wires in any event.
- 4) Installation procedure
- a) Remove the lid from the control box.

b) Remove the wiring (fuse \sim CNF2,3) and wiring (TB $\otimes \otimes \sim$ CNB).

▲CAUTION Confirm that electricity has been dischaged before touching the capacitor terminals. There is risk of electric shocks.

- c) Install the fan controller.
- d) Referring to "3) Electric circuit diagram", connect wires as illustrated and fix with bands (a).
- e) Reinstall the removed lid on the control box.

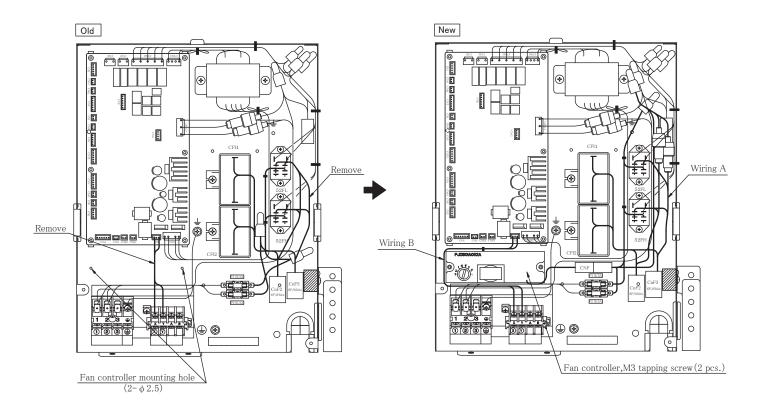


1.5.2 Installation of wired remote controller

(1) Selection of installation location

- Avoid the following locations
- (a) Direct sunlight.
- (b) Close to heating device.
- (c) Highly humid or water splashing area.
- (d) Uneven surface.

(2) Installation procedure

(a) Open the cover of remote controller, and remove the screw under the buttons without fail.




(b) Remove the upper case of remote controller. Insert a flat-blade screwdriver into the dented part of the upper part of the remote controller, and wrench slightly.




[In case of embedding cord]

① Embed the erectrical box and remote controller cord beforehand.




② Prepare two M4 screws (recommended length is 12-16mm) on site, and install the lower case to erectrical box. Choose either of the following two positions in fixing it with screws.



- ③ Connect the remote controller cord to the terminal block. Connect the terminal of remote controller (X,Y) with the terminal of indoor unit (X,Y). (X and Y are no polarity)
- ④ Install the upper case as before so as not to catch up the remote controller cord, and tighten with the screws.

[In case of exposing cord]


① You can pull out the remote controller cord from left upper part or center upper part. Cut off the upper thin part of remote controller lower case with a nipper or knife, and grind burrs with a file etc.




(2) Install the lower case to the flat wall with attached two wooden screws.



③ Connect the remote controller cord to the terminal block. Connect the terminal of remote controller (X,Y) with the terminal of indoor unit (X,Y). (X and Y are no polarity) Wiring route is as shown in the right diagram depending on the pulling out direction.



The wiring inside the remote controller case should be within 0.3mm² (recommended) to 0.5mm². The sheath should be peeled off inside the remote controller case. The peeling-off length of each wire is as below.



- ④ Install the upper case as before so as not to catch up the remote controller cord, and tighten with the screws.
- (5) In case of exposing cord, fix the cord on the wall with cord clamp so as not to slack.

Installation and wiring of remote controller

- Wiring of remote controller should use 0.3mm² × 2 core wires or cables. (on-site configuration)
- (2) Maximum prolongation of remote controller wiring is 600 m. If the prolongation is over 100m, change to the size below. But, wiring in the remote controller case should be under 0.5mm². Change the wire size outside of the case according to wire connecting. Waterproof treatment is necessary at the wire connecting section. Be careful about contact failure.

00-200m	$\dots 0.5 \text{ mm}^2 \times 2 \text{ cores}$
Jnder 300m	$\dots 0.75 \text{ mm}^2 \times 2 \text{ cores}$
Jnder 400m	$\dots 1.25 \text{ mm}^2 \times 2 \text{ cores}$
Jnder 500m	$\dots 2.0 \text{ mm}^2 \times 2 \text{ cores}$

1.5.3 Installation of outdoor unit

Notabilia as a unit designed for R410A

- Do not use any refrigerant other than R410A. R410A will rise to pressure about 1.6 times higher than that of a conventional refrigerant.
- A unit designed for R410A has adopted a different size indoor unit service valve charge port and a different size check joint provided in the unit to prevent the charging of a wrong refrigerant by mistake. The processed dimension of the flared part of a refrigerant pipe and a flare nut's parallel side measurement have also been altered to raise strength against pressure. Accordingly, you are required to arrange dedicated R410A tools listed in the table on the right before installing or servicing this unit.
- Do not use a charge cylinder. The use of a charge cylinder will cause the refrigerant composition to change, which results in performance degradation.
- In charging refrigerant, always take it out from a cylinder in the liquid phase.
- All indoor units must be models designed exclusively for R410A. Please check connectable indoor unit models in a catalog, etc. (A wrong indoor unit, if connected into the system, will impair proper system operation)

Dedicated R410A tools Gauge manifold					
Gauge manifold					
Gauge manifold					
Charge hose					
Electric scale for refrigerant charging					
Torque wrench					
Flare tool					
Protrusion control copper pipe gauge					
Vacuum pump adapter					
Gas leak detector					

(1) Haulage and installation (Take particular care in carrying in or moving the unit, and always perform such an operation with two or more persons.)

When a units hoisted with slings for haulage, take into consideration the offset of its gravity canter position. If not properly balanced, the unit can be thrown off-balance and fall.

Delivery (a)


- 1) Deliver the unit as close as possible to the installation site before removing it from the package.
- When some compelling reason necessitates the unpacking of the unit 2) before it is carried in, use nylon slings or protective wood pieces so as not to damage the unit by ropes lifting it.

(b) Portage

The right hand side of the unit as viewed from the front (diffuser side) is heavier. A person carrying the right hand side must take heed of this fact. A person carrying the left hand side must hold with his right hand the handle provided on the front panel of the unit and with his left hand the corner column section.


(c) Selecting the installation location

- Be careful of the following conditions and choose an installation place.
- \bigcirc Where air is not trapped.
- \bigcirc Where the installation fittings can be firmly installed.
- \bigcirc Where wind does not hinder the intake and outlet air.
- Out of the heat range of other heat sources.
- A place where stringent regulation of electric noises is applicable.
- Where it is safe for the drain water to be discharged.
- Where noise and hot air will not bother neighboring residents.
- Where snow will not accumulate.
- Where strong winds will not blow against the outlet pipe.
- A place where no TV set or radio receiver is placed within 5 m.
- (If electrical interference is caused, seek a place less likely to cause the problem)
- Where it is likely that the unit is subjected to strong winds, provide wind guards according to the following guidelines. Strong winds can cause performance degradation, an accidental stop due to a rise of high pressure and broken fan.




Wooden pallet


Wooden pallet




1) Place the unit outlet pipe perpendicular to the wind direction.



2) Please install so the direction of the air from the blowing outlet will be perpendicular to the direction of the wind.

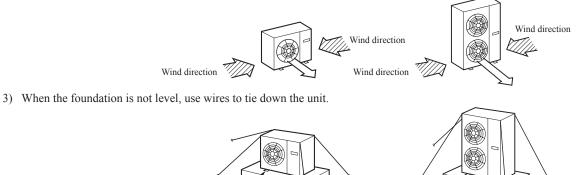







- Walls surrounding the unit in the four sides are not acceptable.
- There must be a 1-meter or larger space in the above.
- Where a danger of short-circuting exists, install guide louvers.
- When more than one unit are installed, provide sufficient intake space consciously so that short-circuiting may not occur.
- Where pilling snow can bury the outdoor unit, provide proper snow guards.

Unit: mm										
Installation example		SRC4	SRC40~60			FDC71		FDC100~250		
Distance	Ι	II	Ш	IV	Ι	П	Ш	Ι	II	III
L1	Open space	280	280	180	Open space	Open space	500	Open space	Open space	500
L2	100	75	Open space	Open space	300	250	Open space	300	5	Open space
L3	100	80	80	80	100	150	100	150	300	150
L4	250	Open space	250	Open space	250	250	250	5	5	5




(e) Installation

1 Anchor bolt fixed position



2 Notabilia for installation



						Unit: mm
Item	А	В	C	D	Е	F
SRC40~60	88.4	200	312.5	510	14.8	24.3
FDC71	150	150	380	580	19	19
FDC100~250	190	200	410	580	20	20

• In installing the unit, fix the unit's legs with bolts specified on the left.

Fasten with anchor bolts


- The protrusion of an anchor bolt on the front side must be kept within 15 mm.
- Securely install the unit so that it does not fall over during earthquakes or strong winds, etc.
- Refer to the left illustrations for information regarding concrete foundations.
- Install the unit in a level area. (With a gradient of 5 mm or less.)
- Improper installation can result in a compressor failure, broken piping within the unit and abnormal noise generation.
- To run the unit for a cooling operation, when the ambient temperature is -5°C or lower. Please equip a flex (f) flow adapter and a snow guard hood (option) on the unit.

(2) Refrigerant piping work

Select the piping to match the specification of indoor unit and installation.

(a) Decision of piping specification

(i) Single type




Maximum one way length

SRC40~60 : L=30 m or less FDC71~140 : L=50 m or less

FDC200, 250 : L=70 m or less

(ii) Twin type

Models FDC71~140 [Branch pipe set : DIS-WA1]



(Example)


Item	Indoor unit combinations	Liquid pipe		Gas pipe	
Model		Main pipe	Branch pipe	Main pipe	Branch pipe
FDC71	40 + 40	∮9.52×t 0.8	∮9.52×t 0.8	ф15.88×t 1.0	\$\\$12.7 \times t 0.8
FDC100	50 + 50				
FDC125	60 + 60				Å 15 00 1.0
FDC140	71 + 71				¢ 15.88 × t 1.0

Height difference

- When the position of outdoor unit is higher than that of the indoor unit, keep the difference H=30 (40~60: 20) m or less.
- When the position of outdoor unit is lower than that of the indoor unit, keep the difference H=15 m or less.


Pip	Piping specification Unit : mm						
	Outdoor unit model	Gas pipe	Liquid pipe				
	SRC40~60	φ 12.7 × t 0.8	φ6.35 × t 0.8				
	FDC71~140	φ15.88 × t 1.0	φ9.52 × t 0.8				
	FDC200	φ 22.22 × t 1.6	φ9.52 × t 0.8				
	FDC250	φ 22.22 × t 1.6	φ12.7 × t 0.8				





- Notes (1) Symbol ① to ④ in the drawing shows the symbols of branch piping parts in the chart respectively.
 - (2) Branch piping should always be arranged to have level or perpendicular position. (See the next page.)
- Notes (1) When 40-60 models of indoor units are applied to this combination, the reducer ③ supplied with the branch piping set should be used in order to reduce the liquid piping size from ø9.52mm to ø6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size ø9.52mm from branch to indoor unit.
 (2) The reducer ④ is for FDC71 and 100 models only.


Models FDC200, 250 [Branch pipe set : DIS-WB1]



(Example)

Item	Indoor unit combinations	Liqui	d pipe	Gas	pipe
Model		Main pipe	Branch pipe	Main pipe	Branch pipe
FDC200	100 + 100	\$ 9.52 × t 0.8	φ0.52 × ±0.8	¢22.22×t1.6 ф	φ 15.88 × f 1.0
FDC250	125 + 125	¢ 12.7 × t 0.8	Ψ 9.52 × t 0.8	♥ 5.52 × 10.0 ♥ 22.22 × 11.0	¥ 15.00 X (1.0

Chart of shapes of branch piping parts (DIS-WB1)




Notes (1) Symbol ① to ③ in the drawing shows the symbols of branch piping parts in the chart respectively.

(2) Branch piping should always be arranged to have level or perpendicular position. (See the next page.)


(2) Minimum one-way piping length should be 3m. If the piping length is less than 3m, the precharged amount of refrigerant should be reduced at site by recovering refrigerant and recharging proper amount according to the instruction of our distributor.

Notes (1) For model FDC200, when the length of the main piping "L" exceeds 30m, ø12.7mm liquid pipe should be used. If ø9.52mm liquid pipe is used instead of ø12.7mm, it may cause performance degradation and/or leakage of condensate from indoor unit.

• The branch piping (both gas and liquid lines) should always be arranged to have a level or perpendicular position.

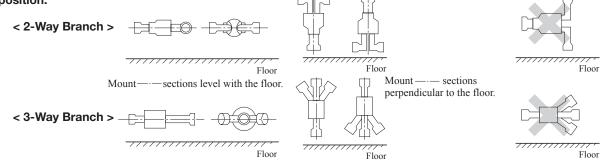


(iii) Triple type (The below mentioned piping diagram shows the application that the difference in piping length between indoor units is less than 3m. In case of the application that the difference in piping length between indoor units is 3m or more, see page 350.)

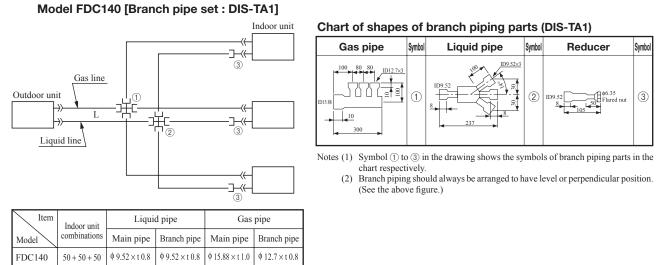


Notes (1) The reducer ③ supplied with the branch piping set should be used in order to reduce the liquid piping size from ø9.52mm to ø6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size ø9.52mm from branch to indoor unit.


Model FDC200 [Branch pipe set : DIS-TB1]



Item	Indoor unit combinations	Indoor unit			Gas pipe		
Model		Main pipe	Branch pipe	Main pipe	Branch pipe		
FDC200	71 + 71 + 71	\$ 9.52 × t 0.8	\$ 9.52 × t 0.8	\$22.22×1.6	\$ 15.88 × t 0.8		

Chart of shapes of branch piping parts (DIS-TB1)






- Notes (1) Symbol ① to ② in the drawing shows the symbols of branch piping parts in the chart respectively.
 - (2) Branch piping should always be arranged to have level or perpendicular position. (See the above figure.)

Notes (1) For model FDC200, when the length of the main piping "L" exceeds 30m, ø12.7mm liquid pipe should be used. If ø9.52mm liquid pipe is used instead of ø12.7mm, it may cause performance degradation and/or leakage of condensate from indoor unit.

(iv) Double twin type

Models FDC200, 250 [Branch pipe set : DIS-WA1 × 2set, DIS-WB1 × 1set]

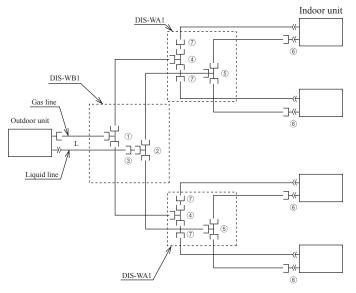


Item	Indoor unit	Liquid pipe			Gas pipe		
Model	combinations	Main pipe	1st branch pipe	2nd branch pipe	Main pipe	1st branch pipe	2nd branch pipe
FDC200	50 + 50 + 50 + 50	\$ 9.52 × t 0.8	φ 9.52 × t 0.8 φ 9.52 × t 0.8	A.0.52.44.0.8	\$ 22.22 × t 1.6	♦ 15.88 × t 1.0	\$ 12.7 × t 0.8
FDC250	60 + 60 + 60 + 60	\$ 12.7 × t 0.8		ψ 9.32 × t 0.8			∮ 15.88×t 1.0

Notes (1) The reducer (6) supplied with the branch piping set should be used in order to reduce the liquid piping size from ø9.52mm to ø6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size ø9.52mm from branch to indoor unit.
 (2) The reducer (7) is for FDC200 model only

Chart of shapes of branch piping parts (DIS-WB1)

Chart of shapes of branch piping parts (DIS-WA1)



Notes (1) Symbol ① to ⑦ in the drawing shows the symbols of branch piping parts in the chart respectively.
(2) Branch piping should always be arranged to have level or perpendicular position. (Refer to the 222 page for details.)
(3) The reducer ③ is for FDC200 model only

Notes (1) For model FDC200, when the length of the main piping "L" exceeds 30m, ø12.7mm liquid pipe should be used. If ø9.52mm liquid pipe is used instead of ø12.7mm, it may cause performance degradation and/or leakage of condensate from indoor unit.


(2) Minimum one-way piping length should be 3m. If the piping length is less than 3m, the precharged amount of refrigerant should be reduced at site by recovering refrigerant and recharging proper amount according to the instruction of our distributor.

(b) How to use pipe reducer (Attached to FDC200, 250 only)

• \$\phi22.22 (OD) size of the refrigerant gas pipe can be used by using the accessory pipe B, although \$\phi25.4 (OD) size of the refrigerant gas pipe is standard.

(When \$25.4 (OD) size of the refrigerant gas pipe is used, the accessory pipe B is unnecssary.) (*) OD: Outer diameter.


Install this accessory pipe according to the following.




(c) Points for attention in installing refrigerant piping

- Use pipes made of the following material Material: Phosphorus deoxidized copper seamless pipes (C1220T, JIS H3300)
- 2) Please dress the refrigerant piping (both gas and liquid pipes) with a heat insulating material for prevention of dew condensation. Improper heat insulation incapable of preventing dew condensation can cause the leaking or dripping of water and a resultant soaking of household effects.
- Use only a good heat insulating material (120°C or higher) for heat insulation. A poor heat insulating material offers only poor heat insulation and can cause cable deterioration.
 - a) The gas pipes can cause dew condensation during a cooling operation, which may become drain water causing a water-leak accident, or a risk of burns during a heating operation, if touched accidentally, with its surface reaching a high temperature because of discharged gas flowing inside. So, do not fail to dress it with a heat insulating material to prevent such mishap.
 - b) Dress the flare joints of the indoor units with a heat insulating material (pipe covers) (for both gas and liquid pipes).
 - c) Dress both gas and liquid pipes with a heat insulating material. In doing so, leave no gaps between the pipe and the heat insulating material and wrap them, together with the connecting cable, with a dressing tape.
 - d) If the unit is used in a place where dew point in the ambient atmosphere is 28°C or higher, and the relative humidity is 70% or higher, dress 20 mm or more of insulation.
- 4) When you need to bend a pipe, bend it to the largest possible radius (R100-R150) permitted. Do not bend a pipe repeatedly in an effort to shape it appropriately.
- In laying pipes, take care to avoid debris, chips or water from entering the piping system.
- 6) A unit and a refrigerant pipe are to be flare connected. Flare a pipe after you have attached a flare nut to the pipe. The dimensions of flaring for R410A are different from those for the conventional R407C refrigerant. Although we recommend the use of flare tools developed specifically for R410A, conventional flare tools can also be used, if the measurement of protrusion B is adjusted with a protrusion control copper pipe gauge.
- Tighten a flare joint securely with double spanners. Observe the following tightening torque values for flare nuts:
- 8) A branching pipe set (option part supplied separately) and refrigerant piping should be connected by brazing.
- In brazing pipes, keep nitrogen gas flowing inside the pipes so that an oxide film may not form on the inner surfaces of the pipes.
- 10) Tighten a flare joint securely with a double spanner.
 - a) Do not apply force beyond proper fastening torque in tightening the flare nut.
 - b) Fix both liquid and gas service valves at the valve main bodies as illustrated on the lower, and then fasten them, applying appropriate fastening torque.


Operation valve size (mm)	Tightening torque (N·m)	Tightening angle (°)	Recommended length of a tool handle (mm)
φ 6.35 (1/4")	14~18	45~60	150
φ 9.52 (3/8")	34~42	30~45	200
φ 12.7 (1/2")	49~61	30~45	250
φ 15.88 (5/8")	68~82	15~20	300
φ 19.05 (3/4")	100~120	15~20	450





Flared pipe end: A (mm)

Copper pipe outer diameter	A _0.4
ø6.35	9.1
ø9.52	13.2
ø12.7	16.6
ø15.88	19.7



Copper pipe protrusion for flaring: B (mm)

		6 ()			
Copper	In the case of a rigid (clutch) type				
pipe outer diameter	With an R410A tool	With a conventional tool			
φ 6.35					
φ 9.52	0.05	07.12			
φ 12.7	0~0.5	0.7~1.3			
φ 15.88					

Do not hold the valve cap area with a spanner.


Please use a torque wrench. If a torque wrench is not	
available, fasten the flare nut manually first and then	ŀ
tighten it further, using the left table as a guide.	



(d) How to remove the side cover


• Models SRC40 ~ 60, FDC71

First unscrew four screws holding the side cover in place, pull down the cover toward the direction indicated by the arrow, and then pull it toward you to remove it from the casing.

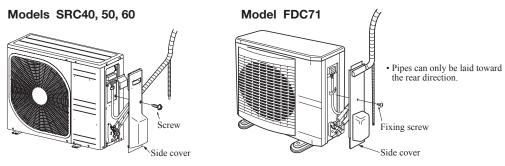

• Models FDC100 ~ 250

First remove the five screws (× mark) of the service panel and push it down into the direction of the arrow mark and then remove it by pulling it toward you.




Models FDC100~140


Models FDC200, 250

(e) Refrigerant pipe connection (Models FDC100 ~ 250 only)

1) The pipe can be laid in any of the following directions: side right, front, rear and downward.

2)Remove a knock-out plate provided on the pipe penetration to open a minimum necessary area and attach an edging material supplied as an accessory by cutting it to an appropriate length before laying a pipe.





Be sure to use the accessory pipe to connect the service valve on the gas side with the field pipe.

- a) Referring to Table ① and Table ②, prepare the straight pipe and the elbow in the field, which are used in the construction examples A ~ D applicable to the connecting direction.
- b) Firstly, use the accessory pipe to assemble the connecting pipe assembly outside the outdoor unit.

As shown in the fi gures of construction examples $A \sim D$ applicable to the connecting direction(chain double dashed line), braze the accessory pipe and the parts prepared in the above ①.


c) After assembly of the connecting pipe, connect it to the service valve on the gas side inside the outdoor unit.


Tighten the flare nut with appropriate torque.

d) After connection of the connecting pipe assembly to the service valve on the gas side, braze the connecting pipe assembly and the field pipe.

 Table ① Parts used for the connecting pipe assembly

No.	Name	Qty.	Remarks	
1	Accessory pipe A	1	Accessories	
2	Straight pipe ①	1	Procured in the field]
3	Straight pipe 2	1 or 0	Procured in the field (Not required for downward direction)	
4	Elbow	1 or 0	Procured in the field (Not required for downward direction)	









Table 2 Length of the straight pipe (prepared in the field)

	Pipe size	(A) Downward	(B) Forward	© Rightward	D Backward
Straight pipe ①	φ22.22 × t 1.6	above 415mm	185~235mm	185~235mm	185~235mm
Straight pipe 2	φ22.22 × t 1.6	_	above 125mm	above 125mm	above 405mm


- Be sure to use pipes of 1/2H material, and wall thickness above 1mm. (Pressure resistance of O-type pipe is not enough)
- Switch ON SW5-1 on the control PCB, if O-type pipe must be used and bent with the bender. During heating operation, the high-pressure protection may be actuated under the condition lower than the normal pressure, and the heating capacity may decrease.


Construction example \triangle




Construction example B Accessory pipe A Straight pipe ① (Procured in the field 185~235mm) Straight pipe ② (Procured in the field above 125mm) Elbow procured in the field

(Forward)

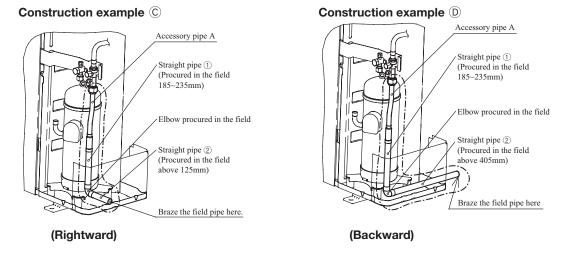



Branching pipe set can be used by using the accessory pipe B. When φ22.22(OD) size of the indoor unit gas pipe is used, the accessory pipe B is unnecessory.

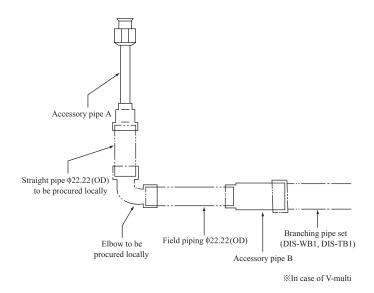


(3) Air tightness test and air purge

•Always use a vacuum pump to purge air trapped within an indoor and the refrigerant piping.


(a) Air tightness test

- 1) When all the flare nuts on both indoor and outdoor unit sides are fastened. Conduct an air-tightness test from the service valves (on both liquid and gas sides) closed tightly to check whether the system has no leaks.
- Use nitrogen gas in the air-tightness test. Do not use gas other than nitrogen gas under any circumstances. Conduct the air-tightness test by applying 4.15MPa of pressure.
- 3) Do not apply the specified pressure at once, but increase pressure gradually.
 - a) Raise the pressure to 0.5 MPa, and then stop. Leave it for five minutes to see if the pressure drops.
 - b) Then raise the pressure to 1.5 MPa, and stop. Leave it for five more minutes to see if the pressure drops.
 - c) Then raise the pressure to the specified level (4.15 MPa), and record the ambient temperature and the pressure.
 - d) If the pressure does not drop after the units is left for approximately one day, the airtighteness is acceptable. When the ambient temperature changes 1°C, the pressure also changes approximately 0.01 MPa. The pressure. if changed, should be compensated for.

(b) Air purge



When the vacuum gauge's needle pointer creeps up, there is moisture left in the system or a leak. Pull air again after you have checked the system for a leak and rectified it. Use a reverse flow stop adapter to prevent the vacuum pump's lubricant oil from flowing into the refrigerant system. When a vacuum air purge is completed, remove the valve rod cap nuts and open the service valves (both liquid and gas sides) as illustrated below. After you have made sure that the valves are in the full-open position, lighten the cap nuts (for the valve rods and charge ports).



• You can purge air with either liquid service valve or gas service valve.

(4) Additional refrigerant charge

(a) Calculate a required refrigerant charge volume from the following table.

• Models SRC 40~60

Item	Additional charge volume (kg)	Refrigerant volume charged	Installation's pipe length (m)
Model	per meter of refrigerant piping (liquid pipe φ6.35)	for shipment at the factory (kg)	covered without additional refrigerant charge
SRC40, 50, 60	0.02	1.40	

• This unit contains factory charged refrigerant covering 15m of refrigerant piping and additional refrigerant charge on the installation site is not required for an installation with up to 15m refrigerant piping.

When refrigerant piping exceeds 15m, additionally charge an amount calculated from the pipe length and the above table for the portion in excess of 15m.

• If an existing pipe system is used, a required refrigerant charge volume will vary depending on the liquid pipe size.

Formula to calculate the volume of additional refrigerant required

Additional charge volume (kg) = { Main length (m) – Factory charged volume 15 (m) } $\times 0.02$ (kg/m)

Note (1) When an additional charge volume calculation result is negative, it is not necessary to charge refrigerant additionally.

• For an installation measuring 15 m or shorter in pipe length, please charge the refrigerant volume charged for shipment at the factory, when you recharge refrigerant after servicing etc.

Model FDC71

Item Model	Standard refrigerant charge volume (kg)		Additional charge volume (kg) per meter of refrigerant piping (liquid pipe \u00f66.35)		Installation's pipe length (m) covered without additional refrigerant charge
FDC71	2.35	20	0.06	2.95	30

• This unit contains factory charged refrigerant covering 30m of refrigerant piping and additional refrigerant charge on the installation site is not required for an installation with up to 30m refrigerant piping.

When refrigerant piping exceeds 30m, additionally charge an amount calculated from the pipe length and the above table for the portion in excess of 30m.

• When refrigerant piping is shorter than 3m, reduce refrigerant by 1kg from the factory charge volume and adjust to 1.95kg.

• If an existing pipe system is used, a required refrigerant charge volume will vary depending on the liquid pipe size.

Formula to calculate the volume of additional refrigerant required

Additional charge volume (kg) = { Main length (m) – Factory charged volume 30 (m) } $\times 0.06$ (kg/m) + Total length of branch pipes (m) $\times 0.06$ (kg/m)

Note (1) When an additional charge volume calculation result is negative, it is not necessary to charge refrigerant additionally.

•For an installation measuring 3m or longer, but not more than 20m, in pipe length, please charge the standard refrigerant charge

volume, when you recharge refrigerant after servicing etc.

•When refrigerant piping is shoter than 3m, recharge 1.95kg of refrigerant.

Ex.) For a 10m installation, charge 2.35 kg of refrigerant.

For a 25m installation, charge " $2.35 + (25-20) \times 0.06 = 2.65$ kg."

• Models FDC100 ~ 140

<Single type>

	0 11					
	Item Model	Standard refrigerant charge volume (kg)	Pipe length for standard refrigerant charge volume (m)	Additional charge volume (kg) per meter of refrigerant piping (liquid pipe)	Refrigerant volume charged for shipment at the factory (kg)	Installation's pipe length (m) covered without additional refrigerant charge
	FDC100					
ſ	FDC125	2.0	0	0.06	3.8	30
	FDC140					

<Twin, triple, W-twin type>

Item	Standard refrigerant charge volume (kg)	Pipe length for standard refrigerant	ner meter of re	rge volume (kg) frigerant piping	Refrigerant volume charged for shipment at the factory (kg)	
Model		charge volume (m)	Main pipe	Branch pipe	at the factory (kg)	refrigerant charge
FDC100						
FDC125	2.0	0	0.	06	3.8	30
FDC140						

• A standard refrigerant charge volume means a refrigerant charge volume for an installation with 0m long refrigerant piping.

• This unit contains factory charged refrigerant covering 30m of refrigerant piping and additional refrigerant charge on the installation site is not required for an installation with up to 30m refrigerant piping.

When refrigerant piping exceeds 30m, additionally charge an amount calculated from the pipe length and the above table for the portion in excess of 30m.

• When refrigerant piping is shoter than 3m, reduce refrigerant by 1kg from factory charged volume and adjust to 2.8kg. If an existing pipe system is used, a required refrigerant charge volume will vary depending on the liquid pipe size.

Formula to calculate the volume of additional refrigerant required

FDC100~140 Additional charge volume (kg) = { Main pipe length (m) - Length covered without additional charge 30 (m) } × 0.06 (kg/m) + Total length of branch pipes (m) × 0.06 (kg/m)

Note (1) When an additional charge volume calculation result is negative, it is not necessary to charge refrigerant additionally.

• To charge refrigerant again, recover refrigerant from the system first and then charge the volume calculated from the above table. (Standard refrigerant charge volume + branch pipes charge volume)

• Models FDC200, 250

<Single type>

Item Model	Standard refrigerant	Pipe length for standard refrigerant charge volume (m)	Additional charge volume (kg) per meter of refrigerant piping (liquid pipe)	Refrigerant volume charged for shipment at the factory (kg)	Installation's pipe length (m) covered without additional refrigerant charge
FDC200			0.06 (Liquid piping ϕ 9.52)	5.4	
FDC200	3.6	0	0.12 (Liquid piping ϕ 12.7)	5.4	30
FDC250			0.12	7.2	

<Twin, triple, W-twin type>

	Item	Standard refrigerant	Pipe length for standard refrigerant	tandard refrigerant (liquid pipe)		Refrigerant volume charged for shipment	Installation's pipe length (m) covered without additional	
	Model	onarge volume (ng)	charge volume (m)	Main pipe	Branch pipe	at the factory (kg)	refrigerant charge	
	FDC200			0.06 (Liquid piping ϕ 9.52)		5.4		
	1 DC200	3.6	0	0.12 (Liquid piping ϕ 12.7)		0.4	30	
Γ	FDC250			0.12	0.06	7.2]	

• A standard refrigerant charge volume means a refrigerant charge volume for an installation with 0m long refrigerant piping.

• This unit contains factory charged refrigerant covering 30m of refrigerant piping and additional refrigerant charge on the installation site is not required for an installation with up to 30m refrigerant piping.

When refrigerant piping exceeds 30m, additionally charge an amount calculated from the pipe length and the above table for the portion in excess of 30m.

• When refrigerant piping is shoter than 3m, reduce refrigerant by 1kg from factory charged volume and adjust to 4.4kg(FDC200) or 6.2kg(FDC 250).

• If an existing pipe system is used, a required refrigerant charge volume will vary depending on the liquid pipe size.

Formula to calculate the volume of additional refrigerant required

DD COOO	liquid piping	$ \begin{array}{l} \mbox{Additional charge volume (kg) = \{ \mbox{ Main pipe length (m) - Length covered without additional charge 30 (m) } \} \times 0.06 \ (kg/m) + \ Total length of branch pipes (m) \times 0.06 \ (kg/m) \\ \end{array} $
FDC200	In the case of ϕ 12.7mm liquid piping	Additional charge volume (kg) = { Main pipe length (m) - Length covered without additional charge 30 (m) } × 0.12 (kg/m) + Total length of branch pipes (m) × 0.06 (kg/m)
FDC250		

Note (1) When an additional charge volume calculation result is negative, it is not necessary to charge refrigerant additionally.

• To charge refrigerant again, recover refrigerant from the system first and then charge the volume calculated from the above table.

(Standard refrigerant charge volume + branch pipes charge volume)


(b) Charging refrigerant


- 1) Since R410A refrigerant must be charged in the liquid phase, you should charge it, keeping the container cylinder upside down or using a refrigerant cylinder equipped with a siphon tube.
- 2) Charge refrigerant always from the liquid side service port with the service valve shut. When you find it difficult to charge a required amount, fully open the outdoor unit valves on both liquid and gas sides and charge refrigerant from the gas (suction) side service port, while running the unit in the cooling mode. In doing so, care must be taken so that refrigerant may be discharged from the cylinder in the liquid phase all the time. When the cylinder valve is throttled down or a dedicated conversion tool to change liquid-phase refrigerant into mist is used to protect the compressor, however, adjust charge conditions so that refrigerant will gasify upon entering the unit.
- 3) In charging refrigerant, always charge a calculated volume by using a scale to measure the charge volume.
- 4) When refrigerant is charged with the unit being run, complete a charge operation within 30 minutes. Running the unit with an insufficient quantity of refrigerant for a long time can cause a compressor failure.

PLEASE NOTE Please put down the refrigerant volume calculated from the pipe length onto the caution label attached on the back side of the service panel.

(5) Drain piping work

- Execute drain piping by using a drain elbow and drain grommets supplied separately as optional parts, where water drained from the outdoor unit is a problem.
- There are 3 drain holes provided on the bottom plate of an outdoor unit to discharge condensed water.
- O When condensed water needs to be led to a drain, etc., install the unit on a flat base (supplied separately as an optional part) or concrete blocks.
- Connect a drain elbow as shown in the illustration and close the other two drain holes with grommets.

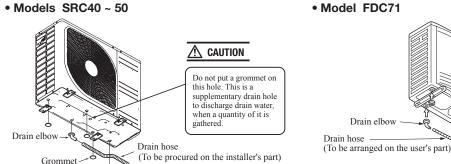



Grommet

Drain elbow

(6) Electrical wiring work

Electrical installation work must be performed by an electrical installation service provider gualified by a power provider of the country.

Electrical installation work must be executed according to the technical standards and other regulations applicable to electrical installations in the country.

- ① Do not use any supply cord lighter than one specified in parentheses for each type below.
 - braided cord (code designation 60245 IEC 51), •
 - ordinary tough rubber sheathed cord (code designation 60245 IEC 53) •
 - flat twin tinsel cord (code designation 60227 IEC 41);
 - Do not use anything lighter than polychloroprene sheathed flexible cord (code designation 60245 IEC57) for supply cords of parts of appliances for outdoor use.
- (2) Ground the unit. Do not connect the grounding wire to a gas pipe, water pipe, lightning rod or telephone grounding wire.
- If improperly grounded, an electric shock or malfunction may result.
- (3) A grounding wire must be connected before connecting the power cable. Provide a grounding wire longer than the power cable
- (4) The installation of an impulse withstanding type earth leakage breaker is necessary. A failure to install an earth leakage breaker can result in an accident such as an electric shock or a fire.
- (5) Do not turn on the power until the electrical work is completed.
- (6) Do not use a running capacitor for power factor improvement under any circumstances. (It does not improve power factor, while it can cause an abnormal overheat accident)
- (7) For power supply cables, use conduits.
- (8) Do not lay electronic control cables (remote control and signaling wires) and other cables together outside the unit. Laying them together can result in the malfunctioning or a failure of the unit due to electric noises.
- (9) Fasten cables so that may not touch the piping etc.
- (10) When cables are connected, please make sure that all electrical components within the electrical component box are free of loose connector coupling or terminal connection and then attach the cover securely. (Improper cover attachment can result in malfunctioning or a failure of the unit, if water penetrates into the box.)
- (f) Always use a three-core cable for an indoor-outdoor connecting cable. Never use a shield cable.


Power cable, indoor-outdoor connecting wires


• Always perform grounding system installation work with the power cord unplugged.

Always use an earth leakage circuit breaker designed for inverter circuits to prevent a faulty operation.

Earth leakage breaker (Harmonic resistant typ	r E (Ha	arth leakage t armonic resist	oreaker ant type)	
Switchgear or circuit brea	aker	tchgear or circ	uit breaker	
	Outdoor unit	1 2 3 1 2/N 3		Outdoor unit
X Y X Y Remote of	Indoor unit controller		emote cont	Indoor unit roller
1 phase model		3 phase mode	el	

Model	Power source	Power cable thickness (mm ²)	Max. over current (A)	Cable length (m)	Grounding wire thickness	Indoor-outdoor wire thickness × number	
SRC40			12	21			
SRC50		2.0	14	18			
SRC60	1 phase		14	10			
FDC71	220-240V 50Hz/ 220V 60Hz	3.5	17	21	φ1.6 mm		
FDC100							
FDC125				5.5	24	25	
FDC140						φ1.6 mm × 3	
FDC100							
FDC125	3 phase 380-415V 50Hz/ 380V 60Hz	3 phase 3.5 15	15	27			
FDC140		5.5			φ1.6 mm		
FDC200			19	21			
FDC250		5.5	22	31			





• At the connection with the duct type indoor unit.


Model	Power source	Power cable thickness (mm ²)	Max. over current (A)	Cable length (m)	Grounding wire thickness	Indoor-outdoor wire thickness × number
FDC100	1 phase	5.5	25	24		
FDC125	220-240V 50Hz/	5.5	27	22		
FDC140	220V 60Hz	8	28	32		φ1.6 mm×3
FDC100			16	26	φ1.6 mm	
FDC125	3 phase	3.5	18	23	ψ1.0 mm	ψ1.0 IIII1×5
FDC140	380-415V 50Hz/		19	21		
FDC200	380V 60Hz	5.5	24	29		
FDC250		5.5	27	26		

Notes (1) The specifications shown in the above table are for units without heaters. For units with heaters, refer to the installation instructions or the construction instructions of the indoor unit.

- (2) Switchgear or circuit breaker capacity which is calculated from MAX. over current should be chosen along the regulations in each country.
- (3) The cable specifications are based on the assumption that a metal or plastic conduit is used with no more than three cables contained in a conduit and a voltage drop is 2%. For an installation falling outside of these conditions, please follow the internal cabling regulations. Adapt it to the regulation in effect in each country.

(d) Wiring diagram

• This diagram shows wiring for a 3 phase model.



4) Between master and slave indoor units, connect between the same numbers ①, ⑳, ③ and ③, ⑨ on the respective terminal blocks.

- 5) Set the same address for the master and slave indoor units as the communications address for the remote controller using rotary switch SW2 on the indoor units' control PCB.
- 6) Set slave a, slave b and slave c using DIP switch SW5-1 and SW5-2 on the control PCB of the respective indoor slave units.
- 7) Be sure to press the AIR CON No. button on the remote controller after turning on the power, then check if the indoor master and slave unit No. is displayed in the remote controller.

The indoor unit address is displayed when the AIR CON No. button is pressed. After that, pressing the \triangle or ∇ key displays the unit No. beginning from the lowest No.


8) Plural Master / Slave setting

Set the plural address switches SW5-1 and SW5-2 on the indoor control PCB as shown in the table right.


Master settin	g at time of	Indoor unit				
factory shipn	nent	Master	Slave a	Slave b	Slave c	
DIDit.d	SW5-1	OFF	OFF	ON	ON	
DIP switch	SW5-2	OFF	ON	OFF	ON	

(e) Remote controller wiring and connection procedure

- 1) Master-slave settings when using multiple remote controllers
 - Up to 2 remote controllers can be connected for each indoor unit (or group).
 - a) There are two methods, one where the remote controller signal line (3-wire) for the slave remote controller is taken from the indoor unit and the other where the signal lines are taken from the master remote controller.




- b) Set the SW1 select switch on the slave remote controller on the Slave setting. (It is set on the Master setting at the factory.)
 - Note (1) Remote controller thermistor activation settings are possible only with the master remote controller. Install the master remote controller in a location where it can sense the room temperature.



Lower

- 2) Controlling multiple indoor units using a single remote controller.
 - Up to 16 indoor units can be controlled with a single remote controller.
 - a) Run 2-wire remote controller lines between each of the indoor units. See "Installation and wiring of remote controller" on page 218 concerning extended remote controller lines.
 - b) Set the remote controller communications address on "0" ~ "F" using rotary switch SW2 on the indoor unit's control board, taking care not to overlap the addresses of any of the units.



c) After turning the power on, press the AIR CON No. button to display the indoor unit's address. Be sure to confirm that the settings are displayed correctly in the remote controller by using the ▲ and ▼ buttons to display the address of each connected indoor unit.

(7) Setting functions using the wired remote controller

(a) The initial function setting for typical using is performed automatically for a remote control unit and an indoor unit by the outdoor unit connected, when remote controller and inside unit are connected. As long as they are used in a typical manner, there will be no need to change the initial settings. If you would like to change the initial setting marked " ○", set your desired setting as for the selected item. The procedure of functional setting is shown as the following diagram. As for detail of setting, refer to the installation manual of remote controller.

(b) Flow of function setting

Start : While indoor unit do not operate, press " 💿 " (SET) and " 🕤 " (MODE) button for 3 seconds at the same time. Finalizea : Press " 💿 " (SET) button.

- Reset : Press " (RESET) button.
- Select : Press ▲ ▼ button.
- End : Press OON/OFF button.

It is possible to finish above setting on the way, and unfinished change of setting is unavailable.


" \bigcirc ": Initial settings

" * " : Automatic criterion

(c) Clearing the function setting

Pressing CHECK (CHECK) + (a) (TIMER) + (c) (MODE) buttons simultaneously reverts the function setting data to the data which are set at the shipping from factory.

① Remote controller unit functions (■ FUNCTION▼)

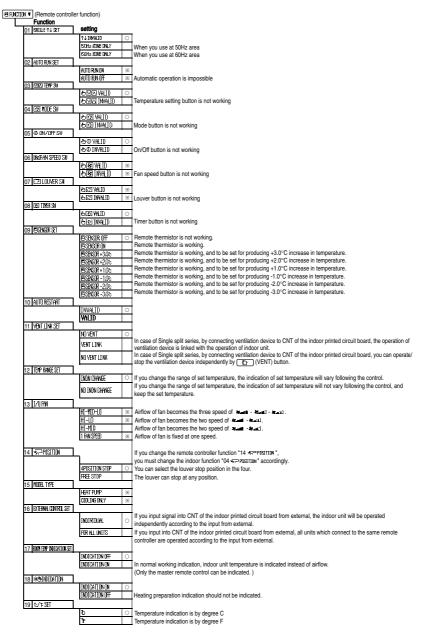


② Indoor unit functions (I/U FUNCTION▲)

			Note1: Fan s	etting of "HIGH SP	'EED"		
			Fai	n tap		nit air flow setting	
Only who	en plural indoor units are connected		FAN	STAN DAR D		HI-LO	
(Indoor unit function) I/URNCTIDN ▲ Indoor N (Note3)	lo. selection Function		SPEED				
I/0000 ▲ I/1001 ≑	02 FAN SPEED SET Setting STANDARD 0	٦	SET	HIGH SPEED1, 2	UHI- HI- MID	UHI - MID	UHI- HI
I/002≑ I/003≑	HIGH SPEED 1 HIGH SPEED 2	(Note1)	Initial function		ndoor unit is "HIGH SPEED"		
I/1004 €	03 FILTER SIGN SET						
	INDICATION OFF	The filter sign	is indicated af	ter running for 180 h	nours.		
If to change re-set with other indoor	TYPE 2 Type 3			ter running for 600 h ter running for 1000			
unit, push AIRCON NO.] button, and indoor selection indication	TYPE 4				hours, then the indoor unit wi	Il be stopped by comp	ulsion after 24 hours.
(for example: I/U 000) is set back.	04 =⊽r⊐POSITION	If you change	the indoor fun	ction "04 ⇒,⊐Positio	N",		
	4PCSITION STOP 0			controller function	"14 ⇒,=P0SITION" accordingly. ur.		
	FREE STOP	The louver car					
	05 EKTERNAL INPUT	_					
	PULSE INPUT	-					
	INVALIO O	. <i>.</i>					
	07 EMERGENCY STOP	Permission/pr	ONIDITION CONTR	ol of operation will b	ie valid.		
	INVALID • VALID	When stop sig	ınal is inputed	from remote on-off	terminal "CNT-6", all indoor ur	its are stopped imme	diately.
	0FFSET +3.0°c	To be reset for	r producina +3	0°C increase in ter	nperature during heating.		
	OFFSET +2.0%	To be reset for	r producing +2	.0°C increase in ter	nperature during heating.		
	08 * SP OFFSET 0FFSET +1.0% NO DFFSET O	To be reset for	r producing +1	.0°C increase in ter	nperature during heating.		
	0FFSET +2016	To be reset or	oducina +2 0°	C increase in return	air temperature of indoor unit		
	0FFSET +1.5%	To be reset pr	oducing +1.5°	C increase in return	air temperature of indoor unit		
	09 RETURN AIR TEMP 0FFSET +1.0%	To be reset pr	oducing +1.0°	C increase in return	air temperature of indoor unit		
	0FFSET - 1.0% 0FFSET - 1.5%		-		air temperature of indoor unit.		
	0FFSET -20%				air temperature of indoor unit. air temperature of indoor unit.		
	10 XF FAN CONTROL LOW FAN SPEED SET FAN SPEED			OFF, fan speed is lo OFF, fan speed is s			
	INTERMITTENCE	When heating	thermostat is	OFF fan speed is o	perated intermittently.		
	FAN OFF	When heating	thermostat is	OFF, the fan is stop	ped.		
				is working, "FAN O the indoor unit's the	FF" is set automatically. ermistor is working.		
	11 ROST PREVENTION TOIP	Change of indoor heat exchanger temperature to start frost prevention control.					
	TBMP HIGH TBMP LOW O	- onango or ma		angor tomporataro t		•	
	12 TRIST PREVENTION CONTROL	Working only a	with the single	solit series			
	FAN CONTROL DN	To control fros	t prevention, t	he indoor fan tap is	raised.		
	FAN CONTROL OFF	-					
	\$0 \$000000		run during coo		_		
	\$\$0 AND \$\$ AND \$\$	Drain pump is	run during co	oling, dry and heatir oling, dry, heating a			
	14 U\$ FAN FEMAINING	Drain pump is	run during co	oling, dry and fan.			
	NO REMAINING O 0.5 HOLR				OFF, the fan does not perform		
	1 HOUR				OFF, the fan perform extra op OFF, the fan perform extra op		Jr.
	6 HOUR				OFF, the fan perform extra op		
	NO REMAINING 🛛 🔿				OFF, the fan does not perfor		
	0.5 HOUR 2 Hour	After heating i	s stopped or h	eating thermostat is	S OFF, the fan perform extra o S OFF, the fan perform extra o	peration for two hours	
	6 HOUR				OFF, he fan perform extra op		
	NO REMAINING O	During heating	n is stopped or	heating thermostat	is OFF the fan perform intern	nittent operation for fiv	ve minutes with low fan speed
	20 ni nOFF 5 ni nON	twenty minute	s' OFF.	-			
	5minOFF5minON	During heating five minutes' C		heating thermostat	is UFF, the fan perform intern	nittent operation for fiv	ve minutes with low fan speed
	<u>.</u>	_					

Note1: Fan setting of "HIGH SPEED"

(d) How to set function

 Stop air-conditioner and press ○ (SET) ○ (MODE) buttons at the same time for over three seconds, and the "FUNCTION SET ▼ " will be displayed.

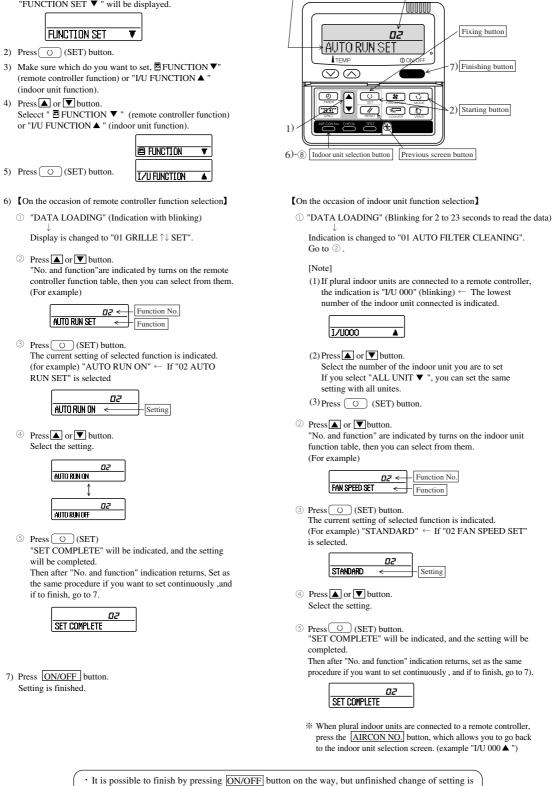

Operation message

Function description: B

etting description: ©

Function No.®

[How to check the current setting]

unavailable

When you select from "No. and funcion" and press set button by the previous operation, the "Setting" displayed first is the current setting.

During setting, if you press (RESET) button, you return to the previous screen.
Setting is memorized in the controller and it is saved independently of power failure.

(But, if you select "ALL UNIT ▼ ", the setting of the lowest number indoor unit is displayed.)

(d) The range of temperature setting.

When shipped, the range of set temperature differs depending on the operation mode as below. Heating : 16~30°C (55~86°F)

Except heating (cooling, fan, dry, automatic) : 18~30°C (62~86°F)

1) Upper limit and lower limit of set temperature can be changed with remote controller.

Upper limit setting: valid during heating operation. Possible to set in the range of 20 to 30°C (68 to 86°F). Lower limit setting: valid except heating (automatic, cooling, fan, dry) Possible to set in the range of 18 to 26°C (62 to 79°F). When you set upper and lower limit by this function, control as below.

a) When (2) TEMP RANGE SET, remote controller function of function setting mode is "INDN CHANGE" (factory setting), [If upper limit value is set]

During heating, you cannot set the value exceeding the upper limit.

[If lower limit value is set]

During operation mode except heating, you cannot set the value below the lower limit.

b) When ① TEMP RANGE SET, remote controller function of function setting mode is "NO INDN CHANGE" [If upper limit value is set]


During heating, even if the value exceeding the upper limit is set, upper limit value will be sent to the indoor unit. But, the indication is the same as the temperature set.

[If lower limit value is set]

During except heating, even if the value lower than the lower limit is set, lower limit value will be sent to the indoor unit. But, the indication is the same as the temperature set.

2) How to set upper and lower limit value

- a) Stop the air-conditioner, and press ○, (SET) and ③, (MODE) button at the same time for over three seconds . The indication changes to "FUNCTION SET ▼ ".
- b) Press \blacksquare button once, and change to the "TEMP RANGE \blacktriangle " indication.
- c) Press \bigcirc (SET) button, and enter the temperature range setting mode.
- d) Select "UPPER LIMIT \checkmark " or "LOWER LIMIT \blacktriangle " by using \blacktriangleright \checkmark button.
- e) Press O (SET) button to fix.
- f) When "UPPER LIMIT \checkmark " is selected (valid during heating)
 - ① Indication: " $^{+}$ →"UPPER 30°C $^{-}$ "
 - ② Select the upper limit value with temperature setting button ▼ ▲. Indication example: "UPPER 26°C ∨∧ " (blinking)
 - ③ Press (SET) button to fix. Indication example: "UPPER 26°C" (Displayed for two seconds) After the fixed upper limit value displayed for two seconds, the indication will return to "UPPER LIMIT ▼ ".
- g) When "LOWER LIMIT **(** " is selected (valid during cooling, dry, fan, automatic)
 - ① Indication: "└ SET UP" → "LOWER 18°C∧ "
 - (2) Select the upper limit value with temperature setting button \bigtriangledown \blacktriangle . Indication example: "LOWER 24°C $\checkmark \land$ " (blinking)
 - ③ Press (SET) button to fix. Indication example: "LOWER 24°C" (Displayed for two seconds) After the fixed upper limit value displayed for two seconds, the indication will return to "LOWER LIMIT ▼ ".
- h) Press ON/OFF button.

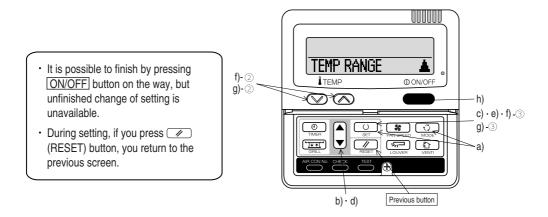

(e) Trail operation of drain pump

Drain pump operation from remote control unit is possible. Operate a remote control unit by following the steps described below.

1) To start a forced drain pump operation.

- ① Press the TEST button for three seconds or longer. The display will change " ≵ TEST RUN ▼ "
- ② Press the ▼ button once and cause " DRAIN PLMP ♥" to be displayed.
- ③ When the O (SET) button is pressed, a drain pump operation will start. Display: "LO TO STOP"

2) To cancel a drain pump operation.

- 1 If either () (SET) or (OON/OFF) button is pressed, a forced drain pump operation will stop. The air conditioning system will become OFF.
- O If two (2) remote controllers are connected to one (1) inside unit, only the master controller is available for trial operation and confirmation of operation data. (The slave remote controller is not available.)

(f) How to set the airflow direction (Only FDT, FDTC, FDE)

(i) FDT, FDTC series

It is possible to change the movable range of the louver on the air supply from the wired remote controller. Once the top and bottom position is set, the louver will swing within the range between the top and the bottom when swing operation is chosen. It is also possible to apply different setting to each louver.

1) Stop the air conditioner and press O SET button and DU-VER button simultaneously for three seconds or more.

The following is displayed if the number of the indoor units connected to the remote controller is one. Go to step 4.

"DATA LOADING" "⇒,¬¬No.1 ▲"

The following is displayed if the number of the indoor units connected to the remote controller are more then one.

"⊕≑ SELECT I/U" "I/U000 ▲"

2) Press \blacktriangle or \blacktriangledown button. (selection of indoor unit)

Select the indoor unit of which the louver is set.

 [EXAMPLE]

 "1/U000
 ▲"⇔"1/U001
 \$ "⇔"1/U002
 \$ "⇔

 "1/U003
 \$ "
 "

3) Press O SET button. (determination of indoor unit)

Selected indoor unit is fixed.

```
IEXAMPLE]

"I/U001 " (displayed for two seconds)

↓

"DATA LOADING "


↓


"⇒_____No.1 ▲"
```

NOTICE

• For FDT type, in case the louver No. to be set is uncertain, set any louver temporarily. The louver will swing once when the setting is completed and it is possible to confirm the louver No. and the position.

After that, choose the correct louver No. and set the top and bottom position. • For FDTC series, set louver No.1 other settings selected have no effect.





Louver No.

4) Press ▲ or ▼ button. (selection of louver No.)

Select the louver No. to be set according to the right figure.

• For FDTC series, set louver No.1 other settings selected have no effect.

5) Press O SET button. (Determination of louver No.)

The louver No. to be set is confirmed and the display shows the upper limit of the movable range.


[EXAMPLE] If No.1 louver is selected, "N₀.1 UPPER2 \$" ← current upper limit position

6) Press ▲ or ▼ button. (selection of upper limit position)

Select the upper limit of louver movable range.

"position 1" is the most horizontal, and "position 6" is the most downward. "position --" is to return to the factory setting. If you need to change the setting to the default setting, use "position --".

 $\begin{array}{c} "N_{0},1 \ UPPER1 & \overline{\bullet}" \ (the most horizotal) \\ \Leftrightarrow "N_{0},1 \ UPPER2 & \Leftrightarrow" \\ \Leftrightarrow "N_{0},1 \ UPPER3 & \Leftrightarrow" \\ \Leftrightarrow "N_{0},1 \ UPPER5 & \Leftrightarrow" \\ \Leftrightarrow "N_{0},1 \ UPPER5 & \Leftrightarrow" \ (the most downwards) \\ \Leftrightarrow "N_{0},1 \ UPPER6 & & (return to the default setting) \end{array}$



7) Press O SET button. (Fixing of the upperlimit position)

The upper limit position is fixed and the setting position is displayed for two seconds. Then proceed to lower limit position selection display.

[EXAMPLE] No.1 UPPER2 ↓ No.1 LOWER5 ♦ (shows current setting)

8) Press \blacktriangle or \blacktriangledown button. (Selection of lower limit position)

Select the lower limit position of louver.

"position 1" is the most horizontal, and "position 6" is the most downwards.

"position --" is to return to the factory setting. If you need to change the setting to the default setting, use "position --".

 N0.1 LOWER *
 ▼ (the most horizontal)

 N0.1 LOWER 2
 ⇒

 N0.1 LOWER 4
 ⇒

 N0.1 LOWER 5
 ⇒

 N0.1 LOWER 6
 ⇒ (the most downwards)


 N0.1 LOWER 6
 ⇒ (return to the default setting)

9) Press O SET button. (Fixing of the upper limit position)

Upper limit position and lower limit position are fixed, and the set positions are displayed for two seconds, then setting is completed.

 After the setting is completed, the louver which was set moves from the original position to the lower limit position, and goes back to the original position again. (This operation is not performed if the indoor unit and/or indoor unit fan is in operation.)

(example) №.1 U2 L6	(displayed for two seconds)
SET COMPLETE	
≂⊽r⊒ No.1 🔺	



10) Press ①ON/OFF button.

Louver adjusting mode ends and returns to the original display.

Caution


If the upper limit position number and the lower limit position number are set to the same position, the louver is fixed at that position auto swing does not function.

ATTENTON

If you press RESET button during settings, the display will return to previous display. If you press (OON/OFF) button during settings, the mode will be ended and return to original display, and the settings that have not been completed will become invalid.

When plural remote controllers are connected, louver setting operation cannot be set by slave remote controller.

- If it is necessary to fix the louver position manually, follow the procedure mentioned below.
- ① Shut off the main power switch.
- (2) Unplug the connector of the louver motor which you want to fix the position. Make sure to insulate unplugged connectors electrically with a vinyl tape.
- ③ Adjust the louver position slowly by hand so as to be within the applicable range mentioned below table.

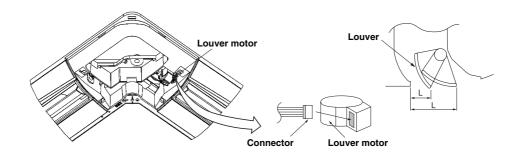

<Range of louver setting>

Vertical airflow direction	Horizontal 0°	Downwards 45°	
Dimension L (mm)	43	26	※It can be set between 26~43mm free

Caution

- Any automatic control or operation from the remote controller will be disabled on the louver whose position is fixed in the above way.
- Do not set a louver beyond the specified range. Failure to observe this instruction may result in dripping, dew condensation, the fouling of the ceiling and the malfunctioning of the unit.

(ii) FDE series

It is possible to change the movable range of the louver on the air supply from the wired remote controller. Once the top and bottom position is set, the louver will swing within the range between the top and the bottom when swing operation is chosen. It is also possible to apply different setting to each louver.

- Stop the air conditioner and press SET button and (¬)
 LOUVER button simultaneously for three seconds or more.
 - The following is displayed if the number of the indoor units connected to the remote controller is one. Go to step 4.

"DATA LOADING" "⇒¬¬N₀,1 ▲"

• The following is displayed if the number of the indoor units connected to the remote controller are more than one.

"⊕\$ SELECT I/U" "I/U000 ▲"

- 2) Press ▲ or ▼ button. (selection of indoor unit)
 - Select the indoor unit of which the louver is set.

```
        [EXAMPLE]

        "I/U000
        ▲"⇔"I/U001
        ♦ "⇔"I/U002
        ♦ "⇔

        "I/U003
        ♥ "
```

3) Press O SET button. (determination of indoor unit)

• Selected indoor unit is fixed.

```
[EXAMPLE]

"I/U001 " (displayed for two seconds)

↓

"DATA LOADING "

↓

"ラ_¬ N<sub>0</sub>.1
```

- 4) Press ▲ or ▼ button. (selection of louver No.)
 - Select the louver No. to be set according to the right figure.

[EXAMPLE] "≒,⊐ №.1

5) Press O SET button. (Determination of louver No.)


• The louver No. to be set is confirmed and the display shows the upper limit of the movable range.

[EXAMPLE] If No.1 louver is selected, "N₀.1 UPPER2 \$" ← current upper limit position

6) Press \blacktriangle or \blacktriangledown button. (selection of upper limit position)

Select the upper limit of louver movable range.
"position 1" is the most horizontal, and "position 6" is the most downward.
"position --" is to return to the factory setting. If you need to change the setting to the default setting, use "position --".

 $\begin{array}{c} "N_0,1 \mbox{ UPPER} 1 & \ensuremath{\overline{V}}" (the most horizotal) \\ \Leftrightarrow "N_0,1 \mbox{ UPPER} 2 & \ensuremath{\overline{\bullet}}" \\ \Leftrightarrow "N_0,1 \mbox{ UPPER} 3 & \ensuremath{\overline{\bullet}}" \\ \Leftrightarrow "N_0,1 \mbox{ UPPER} 4 & \ensuremath{\overline{\bullet}}" \\ \Leftrightarrow "N_0,1 \mbox{ UPPER} 5 & \ensuremath{\overline{\bullet}}" \\ \Leftrightarrow "N_0,1 \mbox{ UPPER} 6 & \ensuremath{\overline{\bullet}}" (the most downwards) \\ \Leftrightarrow "N_0,1 \mbox{ UPPER} 6 & \ensuremath{\overline{\bullet}}" (return to the default setting) \end{array}$



(horizontal) (1)

0

3

4

5

the position of the louver

(6) (downwards)



7) Press O SET button. (Fixing of the upper limit position)

• The upper limit position is fixed and the setting position is displayed for two seconds. Then proceed to lower limit position selection display.

[EXAMPLE]

No.1 UPPER2 (displayed for two seconds) ↓ No.1 LOWER5 \$ (shows current setting)

8) Press ▲ or ▼ button. (Selection of lower limit position)

• Select the lower limit position of louver.

"position 1" is the most horizontal, and "position 6" is the most downwards.


"position --" is to return to the factory setting. If you need to change the setting to the default setting, use "position --".

No.1 LOWER1 ♥ (the most horizontal) No.1 LOWER2 ♦ No.1 LOWER3 ♦ No.1 LOWER5 ♦ No.1 LOWER6 ♦ (the most downwards) No.1 LOWER6 ▲ (return to the default setting)

9) Press O SET button. (Fixing of the upper limit position)

- Upper limit position and lower limit position are fixed, and the set positions are displayed for two seconds, then setting is completed.
 - After the setting is completed, the louver which was set moves from the original position to the lower limit position, and goes back to the original position again. (This operation is not performed if the indoor unit and/or indoor unit fan is in operation.)

(EXAMPLE) No.1 U2 L6	(displayed for two seconds)
SET COMPLETE	
≂≂⊓ No.1 🔺	



10) Press ①ON/OFF button.

• Louver adjusting mode ends and returns to the original display.

Caution

If the upper limit position number and the lower limit position number are set to the same position, the louver is fixed at that position auto swing does not function.

ATTENTON

If you press RESET button during settings, the display will return to previous display. If you press OON/OFF button during settings, the mode will be ended and return to original display, and the settings that have not been completed will become invalid.

When plural remote controllers are connected, louver setting operation cannot be set by slave remote controller.

(8) Troubleshooting

The operation data is saved when the situation of abnormal operation happen, and the data can be confirmed by remote controller.

[Operating procedure]

- (a) Press the CHECK button. The display change " OPERDATA ▼"
- (b) Once, press the ▼ button, and the display change "ERROR DATA ▲".
- (c) Press the (c) (SET) button and abnormal operation data mode is started.
- (d) When only one indoor unit is connected to remote controller, following is displayed.
 - The case that there is history of abnormal operation.
 → Error code and "DATALDADING" is displayed.
 [Example]: [E8] (ERROR CODE)
 - " DATALDADING " is displayed (blinking indication during data loading).

Next, the abnormal operation data of the indoor unit will be displayed. Skip to step (h).

- ② The case that there is not history of abnormal operation.
 - \rightarrow "ND ERROR" is displayed for 3 seconds and this mode is closed.

(e) When plural indoor units is connected, following is displayed.

- ① The case that there is history of abnormal operation.
 - \rightarrow Error code and the smallest address number of indoor unit among all connected indoor unit is displayed.
 - [Example]: [E8] (ERROR CODE) "]/[000 ▲ " blinking
- (2) The case that there is not history of abnormal operation.
 - \rightarrow Only address number is displayed.

(f) Select the indoor unit number you would like to have data displayed with the $\mathbf{k} \mathbf{\overline{v}}$ button.

(g) Determine the indoor unit number with the \odot (SET) button.

- [Example]: [E8] (ERROR CODE)
- " I/1000 L " (The address of selected indoor unit is blinking for 2 seconds.)

[E8] "DATA LOADING" (A blinking indication appears while data loaded.)

Next, the abnormal operation data is indicated.

If the indoor unit doing normal operation is selected, "NO ERROR" is displayed for 3 seconds and address of indoor unit is displayed.

(h) By the \blacksquare \blacksquare button, the abnormal operation data is displayed.

* Depending on models, the items that do not have corresponding data are not displayed.

(i) To display the data of a different indoor unit, press the AIR CON No. button, which allows you to go back to the indoor unit slection screen.

Error Code of indoor unit

Display on remote	LED on indo	or circuit board	Content	
controller	red (checking)	green (normal)	Content	
	Stays OFF	Continuous flash	Normal	
No-indication	Stays OFF	Stays OFF	Fault on power, indoor power Stays OFF or lack phase	
E1	Stays OFF	Continuous flash	Fault on the transmission between indoor circuit board and remote control	
	Not sure	Not sure	Indoor computer abnormal	
E5	2 time flash	Continuous flash	Fault on outdoor-indoor transmission	
E6	1 time flash	Continuous flash	Indoor heat exchange sensor interrupted or short-circuit	
E7	1 time flash	Continuous flash	Indoor air inhaling sensor broken or short-circuit	
E8	1 time flash	Continuous flash	The temperature of heat exchange abnormal	
E9	1 time flash	Continuous flash	Float SW actions (only with FS)	
E10	Stays OFF	Continuous flash	Excess number of remote controller connections	
E14	3 time flash	Continuous flash	The communication fault for master/slave indoor units	
E16	1 time flash	Continuous flash	Fan motor abnormal	
E19	1 time flash	Continuous flash	Configuration fault on running checking model	
E28	Stays OFF	Continuous flash	Remote controller sensor interrupted	
Over E30	Stays OFF	Continuous flash	Outdoor unit checking (outdoor circuit board LED checking)	

(j) Pressing the OON/OFF button will stop displaying data.

Pressing the 💌 (RESET) button during remote control unit operation will undo your last operation and allow you to go back to the previous screen.

6 If two (2) remote controllers are connected to one (1) indoor unit, only the master controller is available for trial operation and confirmation of operation data. (The slave remote controller is not available.)

(9) Test run (FDC71~250 only)

(a) Test run from an outdoor unit.

1) Test run method

- a) A test run can be initiated from an outdoor unit by using SW3-3 (SW5-3) and SW3-4 (SW5-4) for on-site setting.
- b) Switching SW3-3 (SW5-3) to ON will start the compressor.
- c) The unit will start a cooling operation, when SW3-4 (SW5-4) is OFF, or a heating operation, when SW3-4 (SW5-4) is ON.
- $\label{eq:complete} d) \ \, \frac{\mbox{Do not fail to switch SW3-3 (SW5-3) to OFF when a test run is}{\mbox{completed.}}$

Note(1) () is for model 71.

2) Checking the state of the unit in operation

Use check joints provided on the piping before and after the four-way valve installed inside the outdoor unit for checking discharge pressure and suction pressure.

As indicated in the table shown on the right, pressure detected at each point will vary depending on whether a cooling or heating operation has been selected.

3) Setting SW3-1, SW3-2, J7 (FDC200, 250 only) on-site

- a) Defrost control switching (SW3-1)
 - When this switch is turned ON, the unit will run in the defrost mode more frequently.
 - Set this switch to ON, when installed in a region where outdoor temperature falls below zero during the season the unit is run for a heating operation.
- b) Snow guard fan control (SW3-2)
 - When this switch is turned on, the outdoor unit fan will run for 10 seconds in every 10 minutes, when outdoor temperature falls to 3°C or lower and the compressor is not running.
 - When the unit is used in a very snowy country, set this switch to ON.
- c) Higth pressure control (J7) (FDC200, 250 only)
 - When the option parts that change air flow from outlet are used, cut (open) J7. Cut the jumper wire into two parts and ensure that they are kept isolated from each other.

4) Failure diagnosis in a test run

Error indicated on the	Printed circuit board LED	(The cycles of 5 seconds)	Failure event	Action
remote control unit	Red LED	Green LED	Tallure event	Action
E34	1 time flash	Continuous flash	Open phase	Check power cables for loose contact or disconnection
E40	1 time flash	Continuous flash	63H1 actuation or operation with service valves shut (occurs mainly during a heating operation)	 Check whether the service valves are open. If an error has been canceled when 3 minutes have elapsed
E49	1 time flash	Continuous flash	Low pressure error or operation with service valves shut (occurs mainly during a cooling operation)	since a compressor stop, you can restart the unit by effecting Check Reset from the remote control unit.

7 If an error code other than those listed above is indicated, refer to the wiring diagram of the outdoor unit and the indoor unit.

5) The state of the electronic expansion valve.

The following table illustrates the steady states of the electronic expansion valve.

		When the unit comes to a normal stop		When the unit comes to an abnormal stop	
	When power is turned on	During a cooling operation	During a heating operation	During a cooling operation	During a heating operation
Valve for a cooling operati	on Complete shut position	Complete shut position	Full open position	Full open position	Full open position
Valve for a heating operat	on Full open position	Full open position	Complete shut position	Full open position	Full open position

6) Heed the following on the first operation after turning on the circuit breaker.

This outdoor unit may start in the standby mode (waiting for a compressor startup), which can continue up to 30 minutes, to prevent the oil level in the compressor from lowering on the first operation after turning on the circuit breaker. If that is the case, do not suspect a unit failure.

SW3-3 (SW5-3)	SW3-4 (SW5-4)	
ON	OFF	Cooling during a test run
	ON	Heating during a test run
OFF	-	Normal or After the test operation

	Check joint of the pipe	Charge port of the gas operation valve
Cooling operation	Discharge pressure (High pressure)	Suction pressure (Low pressure)
Heating operation	Suction pressure (Low pressure)	Discharge pressure (High pressure)

(b) Test run from an wired remote controller.

1) Starting a cooling test run.

- 1 Start the system by pressing the 0ON/OFF button.
- 2 Select " 💥 (Cool) " with the 🕄 (MODE) button.
- 3 Press the **TEST** button for 3 seconds or longer.
- The screen display will switch to: "☆ TEST RUN ▼".
- ④ When the ⊙ (SET) button is pressed while "☆ TEST RUN ▼". is indicated, a cooling test run will start. The screen display will switch to " ☆ TEST RUN".

2) Ending a cooling test run.

Pressing the OON/OFF button, the (TEMP) button or (MODE) button will end a cooling test run. (Cooling test run will end after 30 minutes pass.)

" $\mbox{\tt TEST RUN}$ " shown on the screen will go off.

1.6 MAINTENANCE DATA

1.6.1 Servicing

(1) Evacuation


The evacuation is a procedure to purge impurities, such as noncondensable gas, air, moisture from the refrigeration circuit by using a vacuum pump. Since the refrigerant R410A is very insoluble in water, even a small amount of moisture left in the refrigeration circuit will freeze, causing what is called ice clogging.

Evacuation procedure

Make sure that the both service valves of gas and liquid line are fully opened.

- (a) Check to ensure that there is no internal pressure in the unit. If there is an internal pressure, it should be relieved through the service port to vacant refrigerant cylinder.
- (b) Connect the charging hose of the gauge manifold to the service port of the gas piping. Close high pressure valve ② of gauge manifold.
- (c) Connect the charging hose (A) to a vacuum pump.

Repeat evacuation in the following sequence.




When the vacuum gauge's needle pointer creeps up, there is moisture left in the system or a leak. Pull air again after you have checked the system for a leak and rectified it. Use a reverse flow stop adapter to prevent the vacuum pump's lubricant oil from flowing into the refrigerant system.

Notes (1) Do not use the refrigerant pressure to expel air.

(2) Do not use the compressor for evacuation.

(3) Do not operate the compressor in a vacuum condition.

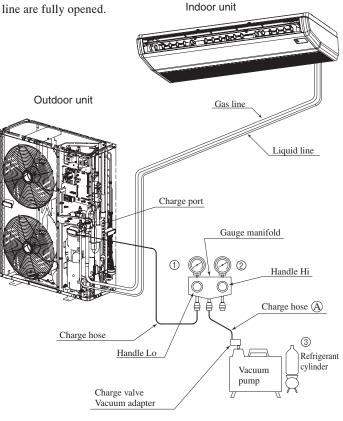

(2) Refrigerant charging

- (a) After the evacuation shown in the above, change the connection of the charge hose (A) to the refrigerant cylinder.
- (b) Purge air from the charge hose (A). First loosen the connecting portion of the charge hose at the gauge manifold side and open valve (3) for a few seconds, and then immediately retighten it after observing that gas has blown out from loosened connecting portion.
- (c) Open valves ① and ③ then gas refrigerant begins flowing from the cylinder into the unit. When refrigerant has been charged into the unit to some extent, refrigerant flow becomes stagnant. When that happens, start the compressor in cooling cycle until the system is filled with the specified amount of gas, then close valves ① and ③ and remove the gauge manifold. Cover the service port with caps and tighten them securely.
- (d) Check for gas leakage by applying a gas leak detector around the piping connection.
- (e) Start the air conditioner and make sure of its operating condition.

1.6.2 Trouble shooting for refrigerant circuit

(1) Judgement of operating condition by operation pressure and temperature difference

Making an accurate judgement requires a skill that is acquired only after years of experience, one trouble may lead to an another trouble from a single trouble source and several other troubles may exist at the same time which comes from a undetected different trouble source.

Filtering out the trouble sources can be done easier by comparing with daily operating conditions. Some good guides are to judge the operating pressure and the temperature difference between return air and supply air of indoor unit. Following are some pointers,

	Dese					
Indication	Pres Too low	A little low	Normal	A little high	Too high	Trouble cause
High side Low side					•	 1) Excessive overcharging of refrigerant 2) Mixture of non condensable gas (air etc.)
High side Low side	•					Ineffective compression (defective compressor)
High side Low side	•	•				 Insufficient refrigerant in circuit Clogging of strainer Gas leakage Clogging of air filter (in cooling) Decrease in heat load (in cooling) Locking of indoor fan (in cooling)
High side Low side				•	•	 Locking of outdoor fan (in cooling) Dirty outdoor heat exchanger (in cooling) Mixture of non condensable gas (air etc.)
High side Low side				•	•	1) Too high temperature of room

1.6.3 Diagnosing of microcomputer circuit

(1) Selfdiagnosis function

(a) Check Indicator Table

Whether a failure exists or not on the indoor unit and outdoor unit can be know by the contents of remote controller error code, indoor/outdoor unit green LED (power pilot lamp and microcomputer normality pilot lamp) or red LED (check pilot lamp). (i) Indoor unit side

Remote co	ontroller	Indoor unit	control PCB	Outdoor unit	control PCB	1 anal1			Deferrer
Error code	Red LED	Red LED	Green LED (1)	Red LED	Green LED (1)	Location of trouble	Description of trouble	Repair method	Reference page
		Stays OFF	Keeps flashing	Stays OFF	Keeps flashing	_	Normal operation	_	
No-indication	Stays OFF	Stays OFF	Stays OFF	2 times flash	Stays OFF	Indoor unit power supply	Power OFF, broken wire/blown fuse, broken transformer wire	Repair	274
		*	Keeps		Keeps	Remote controller wires	Poor connection, breakage of remote controller wire * For wire breaking at power ON, the LED is OFE.	Repair	
		3 times flash	flashing	Stays OFF	flashing	Remote controller	Defective remote controller PCB	Replacement of remote controller	275
@ WAIT@ OFI		Stays OFF	Keeps flashing	2 times flash	Keeps flashing	Indoor-outdoor units connection wire	Poor connection, breakage of indoor-outdoor units connection wire	Repair	276~284
E I		Stays OFF	* Keeps flashing	Stays OFF	Keeps flashing	Remote controller Remote controller wires (Noise) Remote controller indoor unit control PCB	• Improper setting of master and slave by remote controller • Poor connection of remote controller signal wire (White) • Intrusion of noise in remote controller wire * Defective remote controller or indoor unit control PCB (defective communication circuit)?	Repair Replacement of remote controller or PCB	285
		2 times flash	Keeps flashing	2 times flash	Keeps flashing	Indoor-outdoor units connection wire	Poor connection of wire between indoor-outdoor units during operation (disconnection, loose connection) Anomalous communication between indoor-outdoor units by noise, etc.	Repair	
		2 times	Keeps	0. OFF	Keeps	(Noise)	• CPU-runaway on outdoor unit control PCB	Power reset or Repair	
25		flash	flashing	Stays OFF	flashing	Outdoor unit control PCB	*• Occurrence of defective outdoor unit control PCB on the way of power supply (defective communication circuit)?	Replacement of PCB	286
		2 times	Keeps	Stays OFF	Stays OFF	Outdoor unit control PCB	Defective outdoor unit control PCB on the way of power supply	Replacement	
		flash	flashing		,	Fuse	Blown fuse		
E6		1 time flash	Keeps flashing	Stays OFF	Keeps	Indoor unit heat exchanger tempera- ture thermistor	Defective indoor unit heat exchanger temperature thermistor (defective element, broken wire, short-circuit) Poor contact of temperature thermistor connector	Replacement, repair of temperature thermistor	287
20			nasning		flashing	Indoor unit PCB	*• Defective indoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB	
E7		1 time flash	Keeps	Stays OFF	Keeps	Indoor unit return air temperature thermistor	Defective indoor unit return air temperature thermistor (defective element, broken wire, short-circuit) Poor contact of temperature thermistor connector	Replacement, repair of temperature thermistor	288
L 1			flashing		flashing	Indoor unit control PCB	*• Defective indoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB	
	Keeps flashing					Installation or oper- ating condition	• Heating over-load (Anomalously high indoor unit heat exchanger temperature)	Repair	
E8	Ū	1 time flash	flash Keeps flashing	Stays OFF	Keeps flashing	Indoor unit heat exchanger tempera- ture thermistor	Defective indoor unit heat exchanger temperature thermistor (short-circuit)	Replacement of temperature therm- istor	289
						Indoor unit control PCB	*• Defective indoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB	
						Drain trouble	Defective drain pump (DM), broken drain pump wire, disconnected connector	Replacement, repair of DM	
E9		1 time flack	Keeps	Stave OFF	Keeps	Float switch	Anomalous float switch operation (malfunction)	Repair	200
		1 time flash	flashing	Stays OFF	flashing	Indoor unit control PCB	*• Defective indoor unit control PCB (Defective float switch input circuit) *• Defective indoor unit control PCB (Defective DM drive output circuit)?	Replacement of PCB	290
						Option	Defective optional parts (At optional anomalous input setting)	Repair	
E 10		Stays OFF	Keeps flashing	Stays OFF	Keeps flashing	Number of con- nected indoor units	When multi-unit control by remote controller is performed, the number of units is over	Repair	291
Е ІЧ		3 times flash	Keeps flashing	Stays OFF	Keeps flashing	Indoor unit No. set- ting Remote controller	No master is assigned to slaves. Anomalous remote controller wire connection, broken wire between master and slave units	Repair	292
-			V			wires Fan motor	Defective fan motor (FDT)	Replacement, repair	
E 16		Stays OFF	Keeps flashing	Stays OFF	Keeps flashing	Indoor unit control PCB	Defective indoor unit control PCB	Replacement	293
E 19		1 time flash	Keeps flashing	Stays OFF	Keeps flashing	Indoor unit control PCB	Improper operation mode setting	Repair	294
E28		Stays OFF	Keeps flashing	Stays OFF	Keeps flashing	Remote controller temperature therm- istor	Broken wire of remote controller temperature thermistor	Repair	295

Note (1) Normal indicator lamp (Indoor, outdoor units: Green) extinguishes (or lights continuously) only when CPU is anomalous. It keeps flashing in any trouble other than anomalous CPU.

(2) * mark in the Description of trouble means that, in ordinary diagnosis, it cannot identify the cause definitely, and, if the trouble is repaired by replacing the part, it is judged consequently that the replaced part was defective.

(ii) Outdoor unit side

1) Model SRC40~60

Remote c	ontroller		nit control CB	Outdoor unit control PCB	Location of	Description of trauble	Danain mathad	Reference
Error code	Red LED	Red LED	Green LED	Red LED	trouble	Description of trouble	Repair method	page
E33		Stays OFF	Keeps flashing	1 time flash	Power supply wires	Anomalous current on inverter primary side	Repair	296
					Installation, operation status	Higher outdoor unit heat exchanger temperature	Repair	
E35		Stays OFF	Keeps flashing	8 times flash	Outdoor unit heat exchanger temperature thermistor Outdoor unit	Defective outdoor unit heat exchanger temperature thermistor Defective outdoor unit control PCB (Defective temperature sensor	Replacement, repair of temperature thermistor Replacement of	299
					control PCB Installation,	input circuit)? • Higher discharge temperature	PCB Repair	
E 36		Stays OFF	Keeps flashing	8 times flash	operation status Discharge pipe temperature thermistor	Defective discharge pipe temperature thermistor	Replacement, repair of temperature thermistor	301
					Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature sensor input circuit)?	Replacement of PCB	
E37		Stays OFF	Keeps flashing	8 times flash	Outdoor unit heat exchanger temperature thermistor Outdoor unit control PCB	Defective outdoor unit heat exchanger temperature thermistor, broken wire or poor connector connection Defective outdoor unit control PCB (Defective temperature sensor input circuit)?	Replacement, repair of temperature thermistor Replacement of PCB	302
E 38	Keeps flashing		Keeps flashing	8 times flash	Ambient air temperature thermistor	Defective ambient air temperature thermistor, broken wire or poor connector connection	Replacement, repair of temperature thermistor	303
	mashing				Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature sensor input circuit)?	Replacement of PCB	
E 3 9		Stays OFF	Stays OFF Keeps flashing		Discharge pipe temperature thermistor	Defective discharge pipe temperature thermistor, broken wire or poor connector connection	Replacement, repair of temperature thermistor	304
					Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature sensor input circuit)?	Replacement of PCB	
ЕЧ2		Stays OFF	Keeps flashing	1 time flash	Outdoor unit control PCB compressor	Current cut (Anomalous compressor over-current)	Replacement of PCB	307, 308
					Installation, operation status	Service valve closing operation	Repair	
ЕЧЛ		Stays OFF	Keeps flashing	1 time flash	Outdoor unit control PCB power transistor	Anomalous inverter over-voltage	Repair PCB replacement	310
ЕЧВ		Stays OFF	Keeps flashing	Keeps flashing	DC fan motor Outdoor unit	Defective DC fan motor Defective outdoor unit control PCB	Replacement	311
E57		Stays OFF	Keeps flashing	2 times flash	control PCB Operation status Installation status	Shortage in refrigerant quantity Service valve closing operation	Repair Service valve opening check	319
E 59		Stays OFF	Keeps flashing	2 times flash	Compressor outdoor unit control PCB	Anomalous compressor startup	Replacement	320
E60		Stays OFF	Keeps flashing	7 times flash	Compressor	Anomalous compressor rotor lock	Replacement	322

Note (1) * mark in the Description of trouble means that, in ordinary diagnosis, it cannot identify the cause definitely, and, if the trouble is repaired by replacing the part, it is judged consequently that the replaced part was defective.

2) Model FDC71~250

Remote c	ontroller	Indoor unit	control PCB	Outdoor unit	control PCB				Reference	
Error code	Red LED	Red LED	Green LED (1)	Red LED	Green LED (1)	Location of trouble	Description of trouble	Repair method	page	
c 711		0. 075	Keeps		Keeps	Power supply wires	Outdoor unit power supply L3-phase interruption, defective noise filter (3-phase model only)	Repair		
ЕЗЧ		Stays OFF	flashing	1 time flash	flashing	Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective power supply input circuit)? (3-phase model only)	Replacement of PCB	297, 298	
						Installation or operating condition	Higher outdoor unit heat exchanger temperature	Repair		
E35		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Outdoor unit heat exchanger temperature thermistor	Defective outdoor unit heat exchanger temperature thermistor	Replacement of temperature thermistor	300	
						Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB		
						Installation or operating condition	Higher discharge temperature	Repair		
E36		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Discharge pipe temperature thermistor	Defective discharge pipe temperature thermistor	Replacement, repair of temperature thermistor	301	
						Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB		
ЕЗЛ		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Outdoor unit heat exchanger temperature thermistor	Defective outdoor unit heat exchanger temperature thermistor, broken wire or poor connector connection	Replacement, repair of temperature thermistor	302	
			nasining		nasiing	Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB		
E 38		Stays OFF	Keeps	1 time flash	Keeps	Ambient air temperature thermistor	Defective ambient air temperature thermistor, broken wire or poor connector connection	Replacement, repair of temperature thermistor	303	
c 20		Stays OFT	flashing	1 unic nasi	flashing	Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB	303	
E 39		Stays OFF	Keeps	1 time flash	Keeps	Discharge pipe temperature thermistor	 Defective discharge pipe temperature thermistor, broken wire or poor connector connection 	Replacement, repair of temperature thermistor	304	
C]]		Stays OFT	flashing	1 unic nasi	flashing	Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective temperature thermistor input circuit)?	Replacement of PCB		
ЕЧО		Stays OFF	Keeps	1 time flash	Keeps	Installation or operating condition • Rising high pressure (Operation of 63H1) • Service valve closing operation		Repair	305	
		·	flashing		flashing	Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective 63H input circuit)?	Replacement of PCB		
E4 I		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Inverter PCB or radiator fin	Power transistor overheat (Model 200, 250 only)	Replacement of PCB or Repair	306	
ЕЧ2	Keeps flash- ing	Stays OFF	Keeps	1 time flash	Keeps	Outdoor unit control PCB compressor	Current cut (Anomalous compressor over-current)	Replacement of PCB	307, 308	
L 'L		54435 011	flashing	1 unic nusi	flashing	Installation or operating condition	Service valve closing operation	Repair		
EHS		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Outdoor unit control PCB	Anomalous outdoor unit control PCB communication	Service valve opening check	309	
<u> </u>			masning		masning	Inverter PCB	Anomalous inverter PCB communication	Replacement of PCB		
ЕЧВ		Stays OFF	Keeps	1 time flash	Keeps	Outdoor unit DC fan motor	Anomalous outdoor unit DC fan motor	Replacement, repair	312	
270		51493 011	flashing	1 time nash	flashing	Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective DC motor input circuit)?	Replacement of PCB	512	
						Installation or operating condition	Low pressure error Service valve closing operation	Repair		
E49		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Low pressure sensor	Anomalous low pressure, broken wire of low pressure sensor or poor connector connection	Replacement, repair of sensor	313, 314	
						Outdoor unit control PCB	*• Defective outdoor unit control PCB (Defective sensor input circuit)?	Replacement of control PCB		
E5 I		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Inverter PCB	Anomalous inverter PCB	Replacement of PCB	315	
<i></i>		Ctaux OFF	Keeps	1.6	Keeps	Suction pipe temperature thermistor	Defective suction pipe temperature thermistor, broken wire or poor connector connection	Replacement, repair of temperature thermistor	216	
E53		Stays OFF	flashing	1 time flash	flashing	Outdoor unit control PCB	*• Defective outdoor unit PCB (Defective thermistor input circuit)?	Replacement of control PCB	316	
· ·			Keeps		Keeps	Low pressure sensor	Defective low pressure sensor	Replacement of sensor		
ES4		Stays OFF	flashing	1 time flash	flashing	Outdoor unit control PCB	Defective outdoor unit control PCB (Defective sensor input circuit)?	Replacement of control PCB	317	
ccc		Stays OFF	Keeps	1 time flash	Keeps	Compressor underneath temperature thermistor	Defective compressor underneath temperature thermistor (Model 200, 250 only)	Replacement of temperature thermistor	319	
E55		Julys OFF	flashing	1 unic nash	flashing	Outdoor unit control PCB	Defective outdoor unit control PCB (Defective thermistor input circuit)? (Model 200, 250 only)	Replacement of control PCB	318	
660			Keeps		Keeps	Operation status	Shortage in refrigerant quantity	Repair		
E57 E59 E60		Stays OFF	flashing	1 time flash	flashing	Installation status	Service valve closing operation	Service valve opening check	319	
E 59		Stays OFF	Keeps flashing	5 times flash	Keeps flashing	Compressor inverter PCB	Anomalous compressor startup	Replacement	321	
E60		Stays OFF	Keeps flashing	1 time flash	Keeps flashing	Compressor	Anomalous compressor rotor position detection (Model 200, 250 only)	Replacement	322	

Note (1) * mark in the Description of trouble means that, in ordinary diagnosis, it cannot identify the cause definitely, and, if the trouble is repaired by replacing the part, it is judged consequently that the replaced part was defective.

(iii) Optional controller in-use

SL	-1N-E -2N-E -3N-E	Indoor unit	control PCB	Outdoor unit	t control PCB	Location of trouble	Description of trouble	Repair method	
Error code	Red LED	Red LED	Green LED	Red LED	Green LED				
E 75	Keeps flashing	Stays OFF	Keeps flashing	Stays OFF	Keeps flashing	SL-1N-E SL-2N-E SL-3N-E	Communication error (Defective communication circuit on the main unit of SL1N-E, SL2N-E or SL3N-E)	Replacement	

(iv) Display sequence of error codes or inspection indicator lamps

Occurrence of one kind of error

Displays are shown respectively according to errors.

Section	Category of display
Error code on remote controller	• Displays the error of higher priority (When plural errors are persisting)
Red LED on indoor unit control PCB	E 1>E5>E 10>E32>E60
Red LED on outdoor unit control PCB	• Displays the present errors. (When a new error has occurred after the former error was reset.)

Error detecting timing

Section	Error description	Error code	Error detecting timing
	Drain trouble (Float switch activated)	69	Whenever float switch is activated after 30 second had past since power ON.
	Communication error at initial operation	"''BWAIT''	No communication between indoor and outdoor units is established at initial operation.
	Remote controller communication circuit error	ΕI	Communication between indoor unit and remote controller is interrupted for mote than 2 minutes continuously after initial communication was established.
Indoor	Communication error during operation	ES	Communication between indoor and outdoor units is interrupted for mote than 2 minutes continuously after initial communication was established.
Indoor	Excessive number of connected indoor units by controlling with one remote controller	E 10	Whenever excessively connected indoor units is detected after power ON.
	Return air temperature thermistor anomaly	67	-50°C or lower is detected for 5 seconds continuously within 60 minutes after initial detection of this anomalous temperature. Or 48°C or higher is detected for 5 seconds continuously.
	Indoor heat exchanger temperature thermistor anomaly	66	-50°C or lower is detected for 5 seconds continuously within 60 minutes after initial detection of of this anomalous temperature. Or 70°C or higher is detected for 5 seconds continuously.
	Ambient air temperature thermistor anomaly	638	-30°C or lower is detected for 5 seconds continuously 3 times within 40 minutes after initial detection of this anomalous temperature. Or -30°C or lower is detected for 5 seconds continuously within 20 seconds after compressor ON.
	Outdoor heat exchanger temperature thermistor anomaly	637	-50°C or lower is detected for 5 seconds continuously 3 times within 40 minutes after initial detection of this anomalous temperature. Or -50°C or lower is detected for 5 seconds continuously within 20 seconds after compressor ON.
Outdoor	Discharge pipe temperature thermistor anomaly	639	-10°C or lower is detected for 5 seconds continuously 3 times within 40 minutes after initial detection of this anomalous temperature.
	Suction pipe temperature thermistor anomaly	853	-50°C or lower is detected for 5 seconds continuously 3 times within 40 minutes after initial detection of this anomalous temperature.
	Low pressure sensor anomaly	654	0V or lower or 3.49V or higher is detected for 5 seconds continuously 3 times within 40 minutes after initial detection of this anomalous pressure.
	Underneath temperature thermistor anomaly	855	-50°C or lower is detected for 5 seconds continuously 3 times within 40 minutes after initial detection of this anomalous temperature.

Error log and reset

Error indicator	Memorized error log	Reset
Remote controller display	• Higher priority error is memorized.	• Stop the unit by pressing the ON/OFF
Red LED on indoor unit control PCB	• Not memorized.	switch of remote controller.If the unit has recovered from anomaly, it
Red LED on outdoor unit control PCB	• Memorizes a mode of higher priority.	can be operated.

Resetting the error log


- Resetting the memorized error log in the remote controller Holding down "CHECK" button, press "TIMER" button to reset the error log memorized in the remote controller.
- Resetting the memorized error log

The remote controller transmits error log erase command to the indoor unit when "VENTI" button is pressed while holding down "CHECK" button.

Receiving the command, the indoor unit erase the log and answer the status of no error.

(2) Troubleshooting procedure

When any trouble has occurred, inspect as follows. Details of respective inspection method will be described on later pages.



(3) Troubleshooting at the indoor unit side


With the troubleshooting, find out any defective part by checking the voltage (AC, DC), resistance, etc. at respective connectors at around the indoor PCB, according to the inspection display or operation status of unit (the compressor does not run, fan does not run, the 4-way valve does not switch, etc.), and replace or repair in the unit of following part.

(a) Replacement part related to indoor PCB's

Control PCB, power supply PCB, temperature thermistor (return air, indoor heat exchanger), remote controller switch, limit switch, transformer and fuse

Note (1) With regard to parts of high voltage circuits and refrigeration cycle, judge it according to ordinary inspection methods.

(b) Instruction of how to replace indoor control PCB

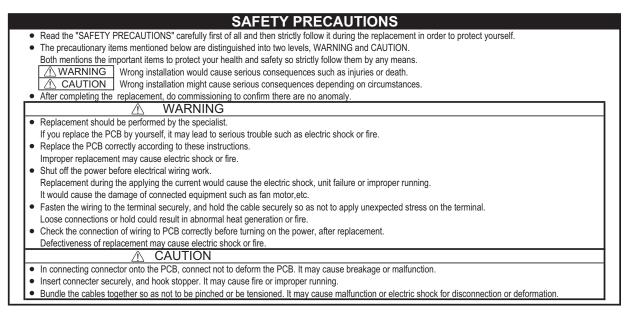

• Model: FDT, FDTC series

Control PCB

This PCB is for spare part that must be set up according to following instruction since it is common.

①Set to an app	$\odot Set$ to an appropriate address and function by using switch on PCB.										
Select the sa	Select the same setting with the removed PCB.										
item	item switch Content of control Address SW2 Plural indoor units control by 1 remote controlle										
Address											
Master /Slave		Master	Slave1	Slave2	Slave3						
setting	SW5-1	_	_	0	0						
Setting	SW5-2	—	0	-	0						
Testrun	SW7-1	-		Normal							
reaction	0007-1	0	Operation c	heck/drain m	otor test run						

O:ON -:OFF

②Set to an appropriate capacity by using the model selector switch(SW6).

Select the same capacity with the PCB removed from the unit.											-	- SW6
SW6	-1	-2	-3	-4		SW6	-1	-2	-3	-4		ON
40V	0	0	—	-		100V	0	0	—	0	1	
50V	0	-	0	-	1	125V	_	—	0	0	1	
60V	0	0	0	-	1	140V	0	—	0	0	1	
71V	0	-	—	0							1	Example settir

O:ON -:OFF

 1
 2
 3
 4

 Example setting for 50V

③Replace the PCB


1. Fix the PCB so as not to pinch the wirings.

2. Be sure to connect the connectors with same color of the PCB connectors.

3. Be sure not to pass the wirings on the surface of PCB (especially CPU).

④Control PCB

The parts mounted on PCB are different with respect to each PCB.

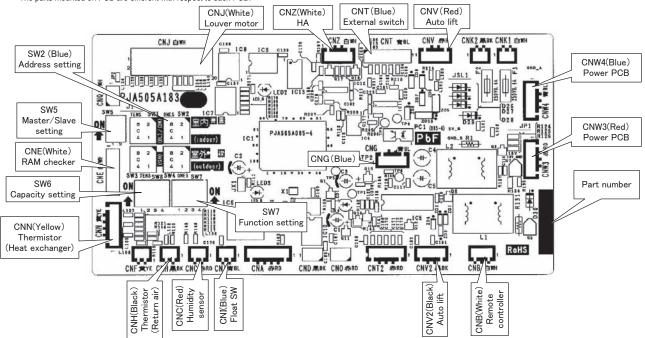

• Power PCB


This PCB is for spare part that must be set up according to following instruction since it is common.

①Replace the PCB

- 1. Fix the PCB so as not to pinch the wirings.
- 2. Be sure to connect the connectors with same color of the PCB connectors.

2 Power PCB

The parts mounted on PCB are different with respect to each PCB.

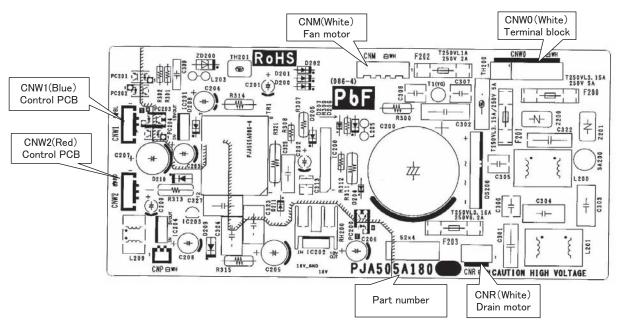

◆ Model: FDUM, FDDU, FDEN series

) Set an appropriate address and Master/Slave setting by using dip switches.

Set the same setting with the PCB removed from the unit.

item	switch	Content of control							
Address	SW2	Plural indoor units control by 1 remote controller							
Master /Slave		Master	Slave1	Slave2	Slave3				
setting	SW5-1	-	-	0	0				
Jotang .	SW5-2	_	0	_	0				
Testrun	SW7-1	_	Normal						
restruit	000-1	0	Operation check/drain motor test run						
0:0N -:0FF									

②Set to an appropriate capacity by using the model selector switch(SW6).

O:0N -:0FF

from the ι 1 -2

0

_

	Select the same capacity with the PCB removed from												
Γ	SW6	-1	-2	-3	-4		SW6	-1					
Γ	40V	0	0	_	_		100V	0					
Γ	50V	0	—	0	—		125V	-					
Γ	60V	0	0	0	—		140V	0					
	71V	0	—	—	0								
_													

unit.						
-3	-4	SW6	-1	-2	-3	-4
-	0	200V	-	0	0	0
0	0	250V	0	0	0	0
0	0					

SW6				_
ON				
	П		П	
ļЦ		Ц		
1	2	3	4	
Exam	ple s	settin	a for	50\

③Replace the PCB


1. Fix the PCB so as not to pinch the wirings.

2. Be sure to connect the connectors with same color of the PCB connectors.

3. Be sure not to pass the wirings on the surface of PCB (especially CPU).

④Control PCB

The parts mounted on PCB are different with respect to each PCB.

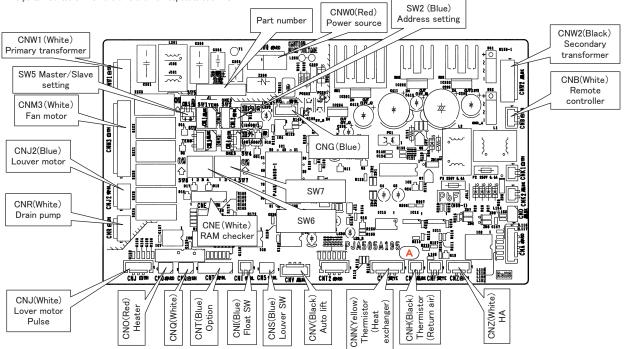

(4) Troubleshooting at the outdoor unit side

When troubleshooting the outdoor unit, firstly assess the overview of malfunction and try to presume the cause and the faulty part by checking the error cord dispalyed on the remote controller and flashing pattern of indicator lamps (Red LED and Green LED), and then proceed further inspection and remedy it.

Self-diagnosis system by microcomputor on indoor and outdoor PCB can assist to find the cause of malfunction smoothly by making a diagnosis of not only the anomaly of microcomutor, but also the anomaly in power supply system, installation space, overload resulting from improper charging amount of refrigerant and etc.

Unless the power is reset, the error log is saved in memory and the inspection indicator lamps on outdoor PCB keep flashing after automatical recovering from malfunction.

After automatical recovering from malfunction, if any another error mode which has a higher priority than the previous error saved in memory occurs, it is overwritten in memory and is displayed.

[Reset of power supply]

Be sure to avoid electrical shock, when replacing or checking the outdoor control PCB, because some voltage is still retained in the electrolytic capacitor on the PCB even after shutting down the power supply to the outdoor unit.

Be sure to start repairing work, after confirming that the Red LED (or Green LED for 71-250type) on the PCB has been extiguished for more than 10 seconds after more than 3 minutes had been passed since power shut down, and reconfirming that voltage has been discharged sufficiently by measuring the voltage (DC) between both terminals of electrolytic capacitor (C58) (Measurment of voltage may be disturbed by the moisture-proof coating. In such case, remove the coating and measure it by taking care of avoiding electrical shock)

(a) Module of part to be replaced for outdoor unit controller

Outdoor control PCB, Inverter PCB, Temperature thermistor (of outdoor heat exchanger, discharge pipe, ambient air, power transistor, suction pipe and underneath), Fuses (for power supply and control PCB), Noise filter, Capacitor, Reactor and Transformer


(b) Replacement procedure of outdoor control PCB


Precautions for Safety							
 Since the following precaution is the important contents for safety, be sure to observe them. WARNING and CAUTION are described as follows: MARNING Indicates an imminently hazardous situation which will result in death or serious injury if proper safety procedures and instructions are not adhered to. Indicates a potentially hazardous situation which may result in minor or moderate injury if proper safety procedures and instructions are not adhered to. 							
🖄 WARNING							
 Securely replace the PCB according to this procedure. If the PCB is incorrectly replaced, it will cause an electric shock or fire. Be sure to check that the power source for the outdoor unit is turned OFF before replacing the PCB. The PCB replacement under current-carrying will cause an electric shock or fire. After finishing the PCB replacement, check that wiring is correctly connected with the PCB before power distribution. If the PCB is incorrectly replaced, it will cause an electric shock or fire. 							
Band the wiring so as not to tense because it will cause an electric shock.							

Replace the control PCB according to the following procedure.

1) Model FDC71VN

- a) Replace the PCB <u>after elapsing 3 minutes from power OFF.</u>
 (<u>Be sure to measure voltage (DC</u>) between T26 and T27 on inverter PCB, and <u>check that the voltage</u> is discharged sufficiently(10V or less).(Refer to Fig.2))
- b) Disconnect the connectors from the control PCB.
- c) Match the switches setting (SW4) with the former PCB.
- d) Connect the connectors to the control PCB.(Confirm the connectors are not half inserted.)

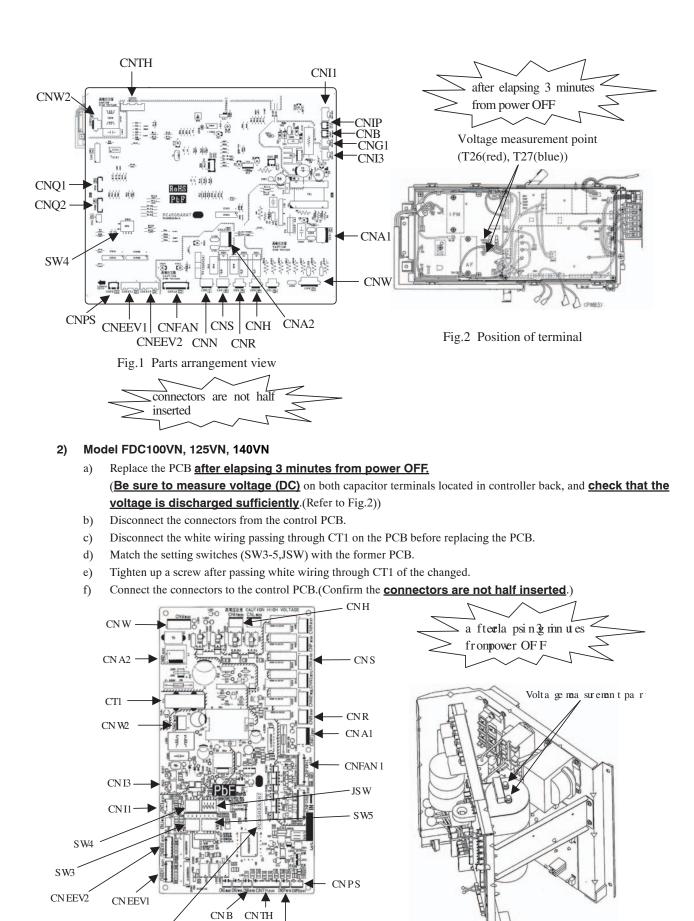



CN IP

ot ha

Figl Partsarrangement view


con n ectora ren

in sertle

Pa rtsNo


3) Model FDC100VS, 125VS, 140VS

- a) Replace the PCB <u>after elapsing 3 minutes from power OFF</u>.
 (<u>Be sure to measure voltage (DC)</u> on both capacitor terminals located in controller back, and <u>check that the</u> <u>voltage is discharged sufficiently</u>.(Refer to Fig.2))
- b) Disconnect the connectors from the control PCB.
- c) Disconnect the white wiring passing through CT1 on the PCB before replacing the PCB.
- d) Match the setting switches (SW3-5,JSW) with the former PCB.
- e) Tighten up a screw after passing white wiring through CT1 of the changed.
- f) Connect the connectors to the control PCB.(Confirm the connectors are not half inserted.)

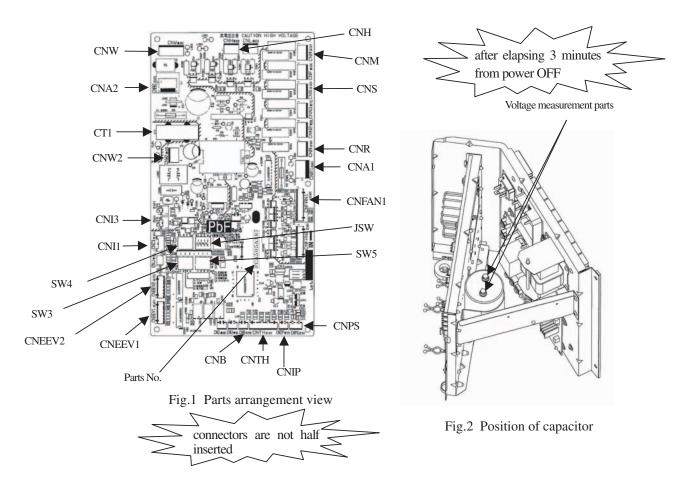

4) Model FDC200VS, 240VS

- Replace the PCB <u>after elapsing 3 minutes from power OFF.</u>
 (<u>Be sure to measure the voltage (DC) of two places</u> (1.Resistor on PCB at the front of controller 2.Both capacitor terminals located in back of controller), and <u>check that the voltage is discharged sufficiently</u>. (Refer to Fig.2))
- b) Disconnect the connectors from the control PCB.
- c) Disconnect the blue wiring passing through CT1 on the PCB before replacing the PCB.
- d) Match the setting switches (SW3-5, JSW) with the former PCB.
- e) Tighten up a screw after passing blue wiring through CT1 of the changed.
- f) Connect the connectors to the control PCB. (Confirm the connectors are not half inserted)

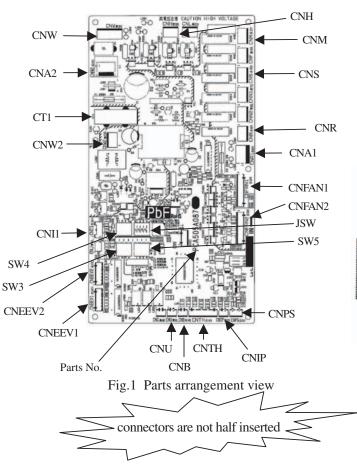

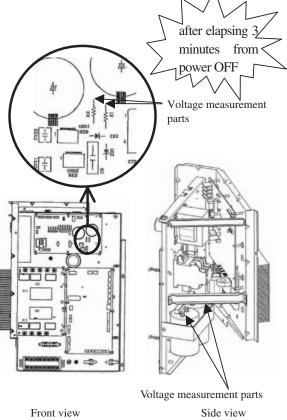



Fig.2 Position of capacitor

(c) Outdoor inverter PCB replacement procedure

	Precautions for Safety						
•	Since the following precaution is the important contents for safety, be sure to observe them. WARNING and CAUTION are described as follows: WARNING Indicates an imminently hazardous situation which will result in death or serious injury if proper safety procedures and instructions are not adhered to. Indicates a potentially hazardous situation which may result in minor or moderate injury if proper safety procedures and instructions are not adhered to.						
	🖄 WARNING						
•	Securely replace the PCB according to this procedure.						
	If the PCB is incorrectly replaced, it will cause an electric shock or fire.						
•	Be sure to check that the power source for the outdoor unit is turned OFF before replacing the						
	PCB. The PCB replacement under current-carrying will cause an electric shock or fire.						
•	After finishing the PCB replacement, check that wiring is correctly connected with the PCB before						
	power distribution. If the PCB is incorrectly replaced, it will cause an electric shock or fire.						
	Band the wiring so as not to tense because it will cause an electric shock.						
Dan	lace the inverter PCB according to the following procedure.						

1) Model FDC71VN

- Replace the PCB <u>after elapsing 3 minutes from power OFF.</u>
 (<u>Be sure to measure voltage (DC)</u> between T26 and T27 on inverter PCB, and <u>check that the voltage is</u> <u>discharged sufficiently (10V or less)</u>. (Refer to Fig.2))
- b) Take off the connection of inverter PCB terminal and connector, and remove the screw of power transistor (IC10), active filter (IC2), and diode stack (DS1) then remove the PCB. Wipe off the silicon grease neatly on the controller's radiation heat fins. (Refer to Fig.1 and 2)
- c) Refer to table1 for the setting of switch (JSW10, 11) of new PCB.
- d) Before installing the power transistor (IC10), active filter (IC2), and diode stack (DS1) on the new PCB, apply silicon grease equally to the their surface. (Make full use of the silicon grease.) They may be damaged unless they apply it.
- e) Tighten the screw of power transistor (IC10), active filter (IC2), and diode stack (DS1) on inverter PCB and connect terminal and connector. Confirm the connection and there is not the half insertion. <u>Tighten properly power transistor</u>, (IC10) active filter (IC2), and diode stack (DS1) with a screw and make sure there is no slack. They can be damage if not properly tighten. (Recommended tightening torque: power transistor (IC10)1.2±0.1 and active filter (IC2)0.98±0.1, diode stack(DS1) 0.5±0.1)Unit N·m

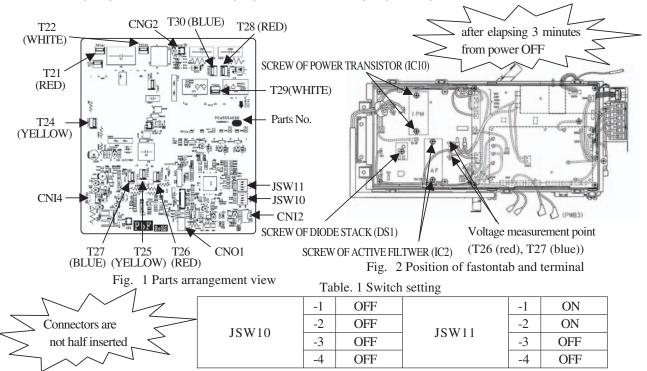

2) Model FDC100VN, 125VN, 140VN

- a) Replace the PCB after elapsing 3 minutes from power OFF. (Be sure to measure voltage (DC) on both capacitor terminals located in controller back, and check that the voltage is discharged sufficiently.(Refer to Fig.2))
- Take off the connection of inverter PCB terminal block connector and remove the screw of power transistor then b) remove the PCB. Wipe off the silicon grease neatly on the controller's radiation heat fins.
- Refer to table1 for the setting of switch (JSW10,11) of new PCB. c)
- d) Before installing the power transistor on the new PCB, Apply uniformly a bundled of silicon grease first on the surface of power transistor. Make sure it is applied to prevent damage on power transistor.
- Tighten the screw of power transistor on inverter PCB and connect the terminal block.Confirm the connection and e) don't use soldering in the connection. Tighten properly the power transistor with a screw and make sure there is no clearance gap.Power transistor can be damage if not properly tighten.(Recommended power transistor tightening torque:0.98~1.47N·m)

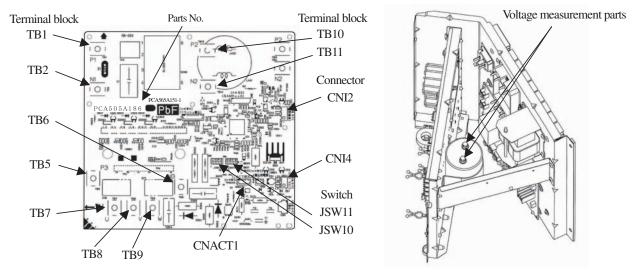


Fig.1 Parts arrangement view

Fig.2 Position of capacitor

Table. 1 Switch setting								
JSW10	-1 OFF			-1	ON			
	-2	OFF	JSW11	-2	OFF			
	-3	OFF	J 3 W 11	-3	OFF			
	-4	4 OFF		-4	ON			

3) Model FDC100VS, 125VS, 140VS

- a) Replace the PCB <u>after elapsing 3 minutes from power OFF</u>.
 (<u>Be sure to measure voltage (DC)</u> on both capacitor terminals located in controller back, and <u>check that the</u> <u>voltage is discharged sufficiently</u>.(Refer to Fig.2))
- b) Take off the connection of inverter PCB terminal block connector and remove the screw of power transistor then remove the PCB. Wipe off the silicon grease neatly on the controller's radiation heat fins.
- c) Refer to table1 for the setting of switch (JSW10,11) of new PCB.
- d) Before installing the power transistor on the new PCB, Apply uniformly a bundled of silicon grease first on the surface of power transistor. Make sure it is applied to prevent damage on power transistor.
- e) Tighten the screw of power transistor on inverter PCB and connect the terminal block.Confirm the connection and don't use soldering in the connection.Tighten properly the power transistor with a screw and make sure there is no clearance gap.Power transistor can be damage if not properly tighten.(Recommended power transistor tightening torque:0.98~1.47N·m)

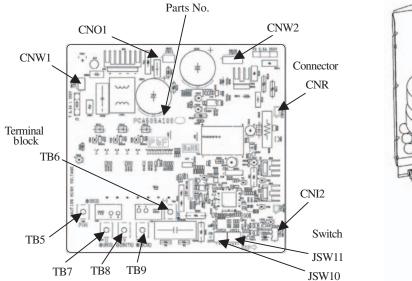


Fig.1 Parts arrangement view

Voltage measurement parts


Fig.2 Position of capacitor


Table. I Switch setting						
	-1	OFF		-1	OFF	
ISW10	-2	OFF	1033/11	-2	ON	
JSW10	-3	OFF	JSW11	-3	OFF	
	-4	OFF		-4	ON	

Table. 1 Switch setting

4) Model FDC200VS, 250VS

- a) Replace the inverter PCB after 10 minutes from power OFF. (Be sure to check that LED(LED1,2) of the inverter PCB put out the lights. It measures that the voltage (AC) between terminals(R,S,T) on the noise filter PCB (see Fig 2) is discharged sufficiently.)
- b) Remove the terminal on the terminal block (TB1) of the inverter PCB and the connector (CNR) of exchange the PCB.
- c) Make set switch (SW1,2) as shown in Table 1.
- d) Connect the terminal of terminal block and the connector to the inverter PCB.

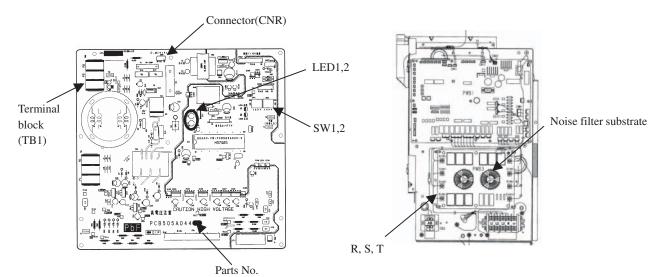



(the inverter substrate)

Fig.2 The front of control

Table.1 Switch setting						
SW1-1	off					
SW1-2	off					
SW1-3	off					
SW1-4	off					
SW2-1	off					
SW2-2	off					
SW2-3	off					
SW2-4	off					

(5) Check of anomalous operation data with the remote		
controller	Number	
Operation data can be checked with remote control unit operation.	01	檾
	02	SE
1 Press the CHECK button.	03	RE
The display change " OPER DATA ▼ "	04	
② Press the \bigcirc (SET) button while " \bigcirc PER \bigcirc T is displayed.	05	TH
3 When only one indoor unit is connected to remote controller,	06	TH
" []ATA LOADING " is displayed (blinking indication during data	07	TH
	08	<u>I/</u>
loading).	09	DEI
Next, operation data of the indoor unit will be displayed. Skip to step \mathcal{D} .	10	AN
④ When plural indoor units is connected, the smallest address number	11	<u>I/</u>
of indoor unit among all connected indoor unit is displayed.	12	TO
[Example]:	21	
	22	TH
" ⊕\$ SELECT I/U " (blinking 1 seconds) → " I/U000 💧 "	23	TH
blinking.	24	
(5) Select the indoor unit number you would like to have data displayed	25	HP
with the \blacktriangle \heartsuit button.	26	
	27	Td
⑥ Determine the indoor unit number with the O (SET) button.	28	
(The indoor unit number changes from blinking indication to	29	CT
continuous indication)	30	TA
" [/U000 " (The address of selected indoor unit is blinking for 2	31	SH
17 UVVV (The address of selected indeet diff is blinking for 2	32	TD

Data Item (Operation Mode) et temp (Set Temperature) Ő. eturn air. (Return Air Temperature) <u>_</u>__ (Remote Controller Thermistor Temperature) ∃SENSOR_ Ô. -II-R1__ზ (Indoor Unit Heat Exchanger Thermistor / U Bend) HI-R2__ზ (Indoor Unit Heat Exchanger Thermistor /Capillary) HI-R3__ზ (Indoor Unit Heat Exchanger Thermistor /Gas Header) /U FANSPEED (Indoor Unit Fan Speed) emand _ (Frequency Requirements) _Hz NSWER. (Response Frequency) Hz /U EEV. (Pulse of Indoor Unit Expansion Value) DTAL I/U RUN H (Total Running Hours of The Indoor Unit) JTDOOR. င်္ဂ (Outdoor Air Temperature) 40-Rt. (Outdoor Unit Heat Exchanger Thermistor) _c 10-R2. (Outdoor Unit Heat Exchanger Thermistor) ĉ NMP (Compressor Frequency) _Hz MPa (High Pressure) _MPa (Low Pressure) (Discharge Pipe Temperature) Ő. omp Bottom C (Comp Bottom Temperature) .AMP (Current) ARGET SH (Target Super Heat) ô. (Super Heat) <u>ქ___ზ</u> DSH (Discharge Pipe Super Heat) č PROTECTION No. (Protection State No. of The Compressor) 33 0/UFANSPEED. 34 (Outdoor Unit Fan Speed) 35 63H1 (63H1 On/Off) (Defrost Control On/Off) 36 DEFROST TOTAL COMP RUN H (Total Running Hours of The Compressor) 37 38 0/UEEV1. (Pulse of The Outdoor Unit Expansion Valve EEVC) Ρ 39 0/UEEV2 (Pulse of The Outdoor Unit Expansion Valve EEVH)

seconds.) ↓

"DATA LDADING" (A blinking indication appears while data loaded.) Next, the operation data of the indoor unit is indicated.

⑦ Upon operation of the button, the current operation data is displayed in order from data number 01.

The items displayed are in the above table.

*Depending on models, the items that do not have corresponding data are not displayed.


- To display the data of a different indoor unit, press the AIR CON NO. button, which allows you to go back to the indoor unit selection screen.
- Pressing the ON/OFF button will stop displaying data.

Pressing the *(RESET)* button during remote control unit operation will undo your last operation and allow you to go back to the previous screen.


 \odot If two (2) remote controllers are connected to one (1) inside unit, only the master controller is available for trial operation and confirmation of operation data. (The slave remote controller is not available.)

(6) Inspection display of wireless specification model (FDEN, FDT)


- (a) Display
 - 1) FDEN Series

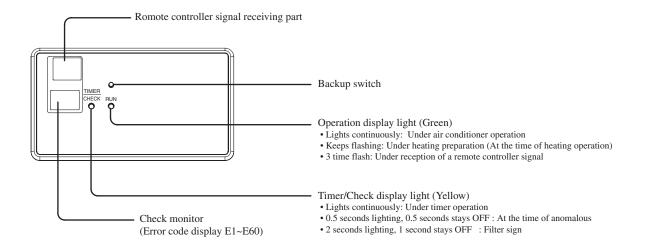

2) FDT (Wireless kit) [For details of the wireless kit, refer to page 353.]

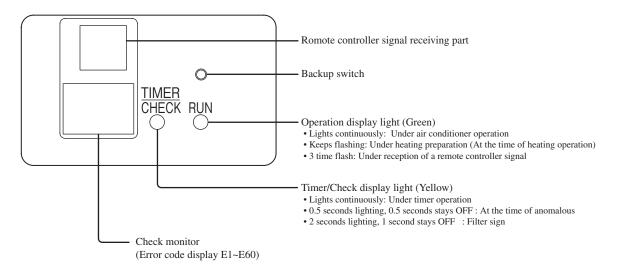

(7) Power transistor module (including the driver PCB) inspection procedure

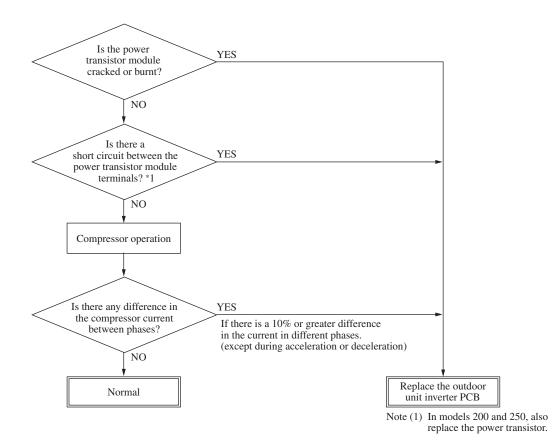

*1 Power transistor module terminal short circuit check procedure

Disconnect the compressor wiring, then conduct a short circuit check.

- P-U, P-V, P-W
- N-U, N-V, N-W
- Check between the P-N terminals.

Bring the tester probes in contact with the following

- places on each te rminal.
- P: Power transistor P terminal,
- N: Power transistor N terminal,
- U: End of red harness to compressor
- V: End of white harness to compressor
- W: End of black or blue harness to compressor

Check for a power transistor short circuit.

- When you do not have a diagnostic checker for judging if the inverter is defective, measure between the terminals of the power transistor parts, judge whether the power transistor is defective or not.
- Disconnect the compressor, then measure with the controller incorporated.

Tes	ster	N	formal values (S	2)
Terminal (+)	Terminal (-)	Model 71	Model 100~140	Model 200, 250
Р	N	0 ~ (Numerical	Approx. 1 M	Scores of M
Ν	Р	value rises.)	Approx. 300~400	A few of M
Р	U	Several M		Scores of M
Р	V	(Numerical	0	Scores of M
Р	W	value rises.)		Scores of M
N	U			Hundreds of K
N	V	Approx. 650 k	Approx. 1.2 M	Hundreds of K
N	W			Hundreds of K
U	Р	Approx. 670 k		Hundreds of K
V	Р	Approx. 4.4 M	Approx. 1.3 M	Hundreds of K
W	Р	Approx. 4.4 M		Hundreds of K
U	N	Approx. 650 k		Scores of M
V	N	Approx. 4.8 M	0	Scores of M
W	N	Approx. 4.9 M		Scores of M


If the measured values range from $0 \sim$ several kW, there is a possibility that the elements are damaged, so replace the power transistor parts.


(8) Troubleshooting flow


(a) List of troubles


No.	Remote controller display	Description of trouble	Reference page
1	None	Operates but does not cool.	267
2	None	Operates but does not heat.	268
3	None	Earth leakage breaker activated	269
4	None	Excessive noise, vibration (1/3)	270
5	None	Excessive noise, vibration (2/3)	271
6	None	Excessive noise, vibration (3/3)	272
7	None	Louver motor failure	273
8	None	Power supply system error (Power supply to indoor unit PCB)	274
9	None	Power supply system error (Power supply to remote controller)	275
10	INSPECT I/U	INSPECT I/U (When 1 or 2 remote controllers are connected)	276
11	INSPECT I/U	INSPECT I/U (Connection of 3 units or more remote controllers)	277
12	டூWAIT டூ	Communication error at initial operation (Model 40~60 only)	278~280
13	©WAIT®	Communication error at initial operation (Model 71~250 only)	281~283
14	None	No display	284
15	E1	Remote controller communication circuit error	285
16	E5	Communication error during operation	286
17	E6	Indoor unit heat exchanger temperature thermistor anomaly	287
18	E7	Return air temperature thermistor anomaly	288
19	E8	Heating overload operation	289
20	E9	Drain trouble (FDT and FDTC series)	290
21	E10	Excessive number of connected indoor units (more than 17 units) by controlling with one remote controller	291
22	E14	Communication error between master and slave indoor units	292
23	E16	Indoor fan motor anomaly (In case of FDTC and FDT)	293
24	E19	Indoor unit operation check, drain motor check setting error	294
25	E28	Remote controller temperature thermistor anomaly	295
26	E33	Inverter primary current error (Model SRC40~60 only)	296
27	E34	Open L3 phase on power supply (3-phase model only)	297, 298
28	E35	Cooling overload operation (Model SRC40~60)	299
29	E35	Cooling overload operation (Model FDC71~250)	300
30	E36	Discharge pipe temperature error	301
31	E37	Outdoor heat exchanger temperature thermistor anomaly	302
32	E38	Ambient air temperature thermistor anomaly	303
33	E39	Discharge pipe temperature thermistor anomaly	304
34	E40	High pressure error (63H1 activated) (Model FDC71~250 only)	305
35	E41	Power transistor overheat (Model FDC200, 250 only)	306
36	E42	Current cut	307, 308
37	E45	Inverter communication error (Model FDC71~250)	309
38	E47	Inverter over-current error (Model SRC40~60)	310
39	E48	DC fan motor error (Model SRC40~60)	311
40	E48	Outdoor DC fan motor (Model FDC71~250)	312
41	E49	Low pressure error or low pressure sensor anomaly (Model 71~250)	313, 314
42	E51	Inverter fan motor anomaly (Model 71~250)	315
43	E53	Suction pipe temperature thermistor anomaly (Model 71~250)	316
44	E54	Low pressure sensor anomaly (Model 71~250)	317
45	E55	Underneath temperature thermistor anomaly (Model FDC200, 250)	318
46	E57	Insufficient in refrigerant amount or detection of service valve closure	319
47	E59	Compressor startup amount (Model SRC40~60)	320
48	E59	Compressor startup failure (Model FDC71~250)	321
49	E60	Anomalous compressor rotor lock (Model FDC200, 250)	322


(b) Troubleshooting




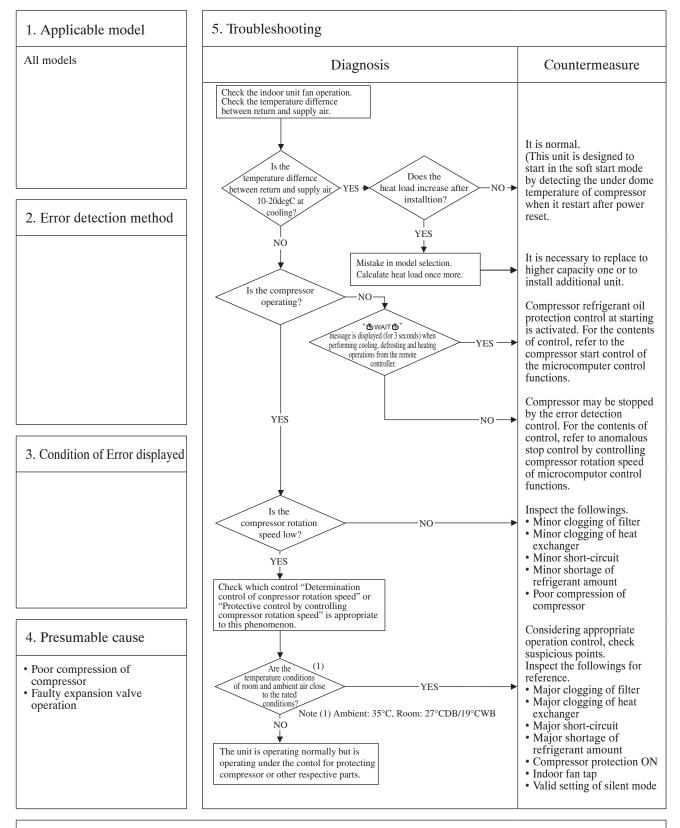




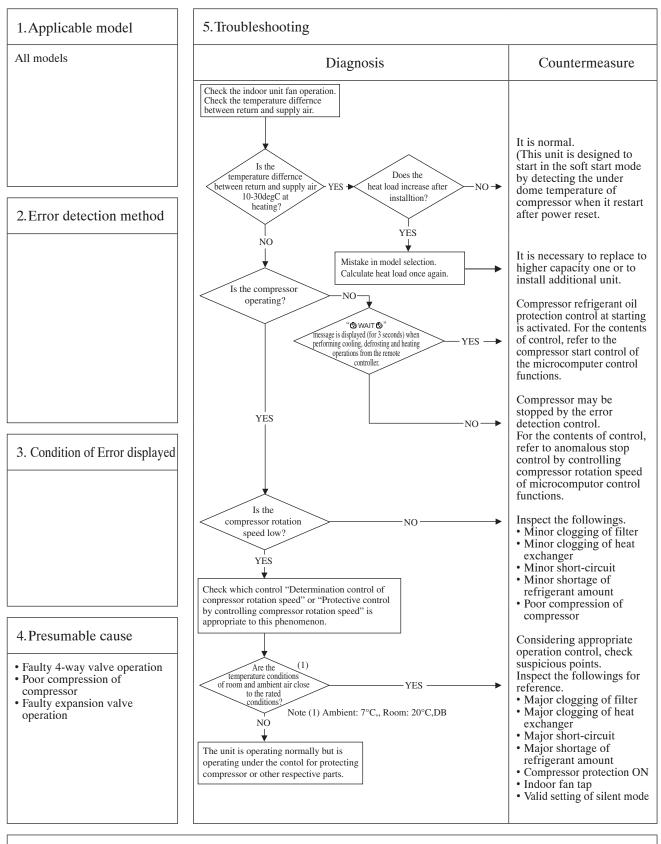




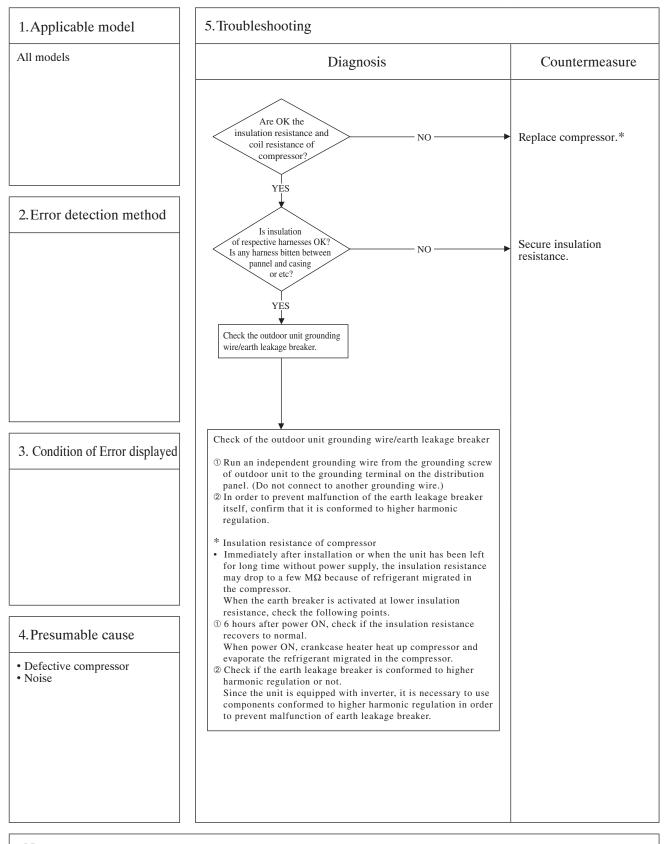


						Ð
ſ	Error code	LED	Green	Red	Content	
	Remote controller: None	Indoor	-	-	Excessive noise/vibration (1/3)	
		Outdoor	_	-	Excessive noise, violation $(1/5)$	J
L)					

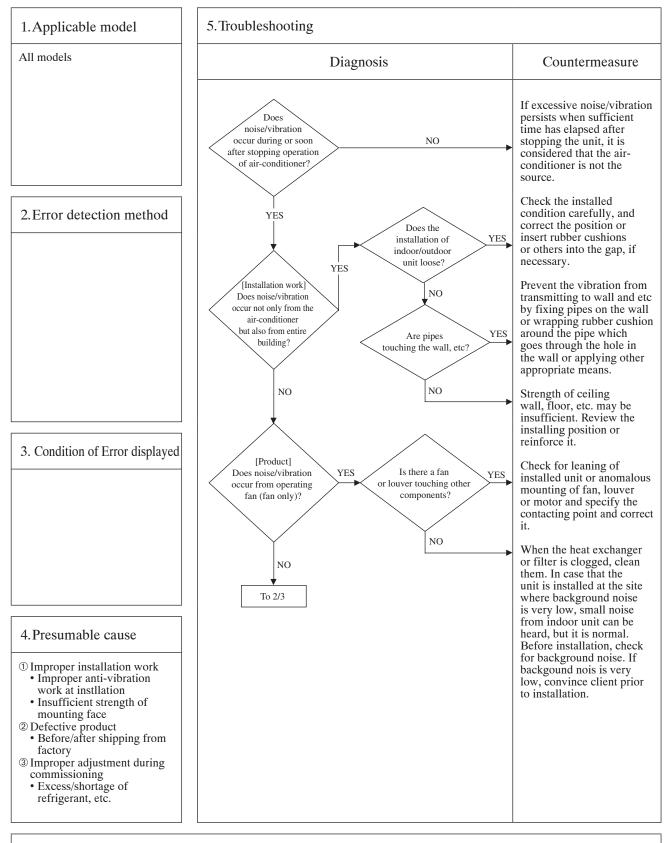


						A
ſ	Error code	LED	Green	Red	Content	
	Remote controller: None	Indoor	-	-	Excessive noise/vibration (2/3)	
		Outdoor	_	-	Excessive noise, violation $(2/3)$	J
L)					

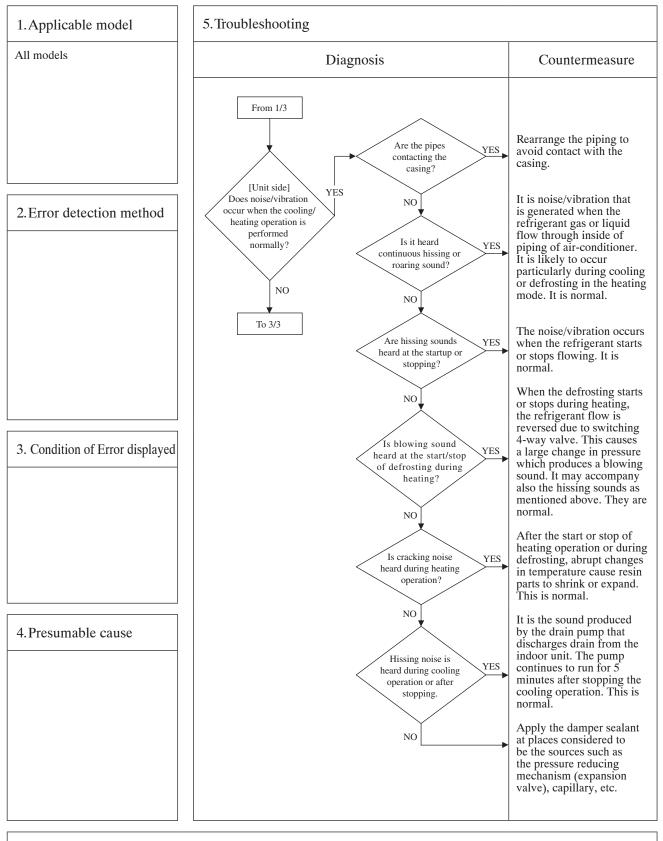


_						Ð
β	Error code	LED	Green	Red	Content	
	Remote controller: None	Indoor	-	-	Excessive noise/vibration (3/3)	
		Outdoor	_	_	Excessive noise/violation $(3/3)$	
L	<u>, </u>					

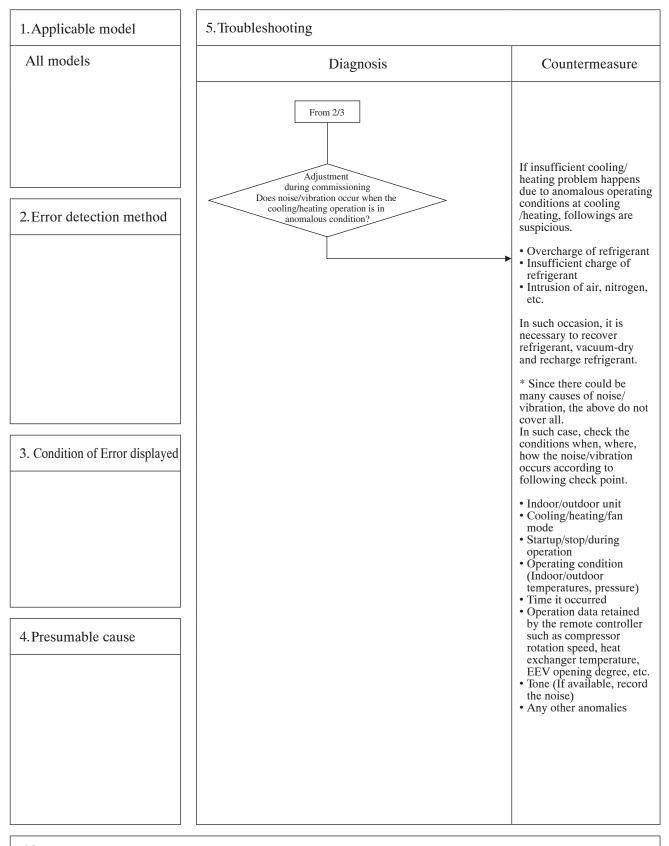


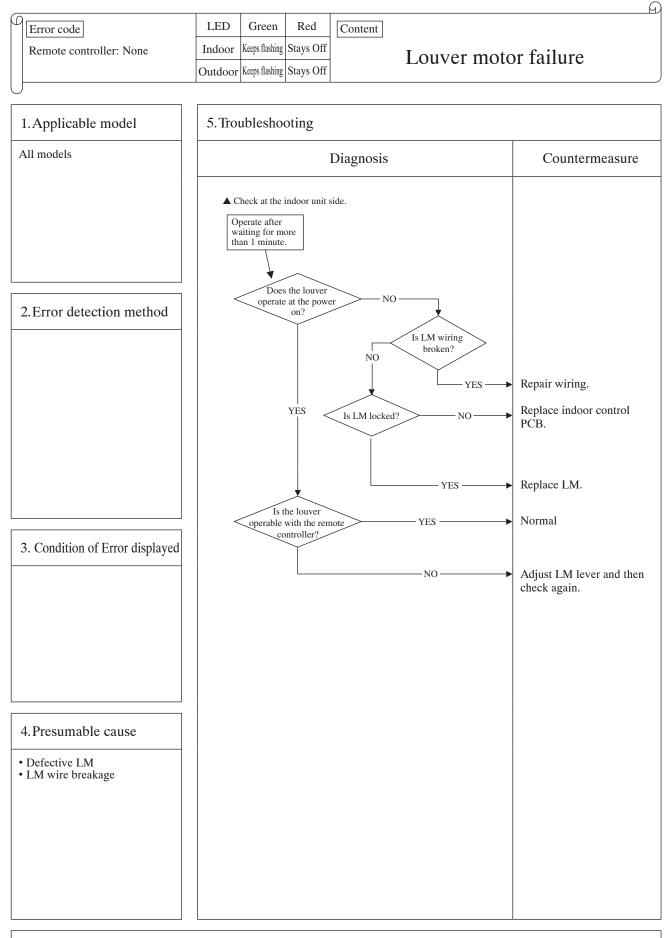


P	Error code	LED	Green	Red	Content Power supply system error
	Remote controller: None	Indoor			
		Outdoor	Stays Off	2 times flash	(Power supply to indoor unit PCB)

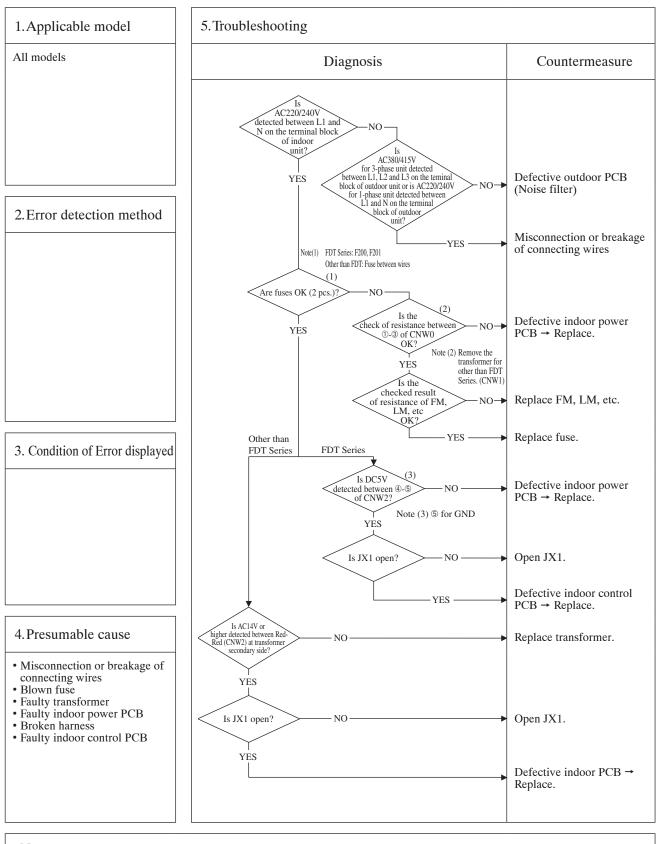

						9
(9	Error code	LED	Green	Red	Content Dower supply system error
		Remote controller: None	Indoor	Keeps flashing	Stays Off	(Power supply to remote controller)
			Outdoor	Keeps flashing	2 times flash	(Tower suppry to remote controller)

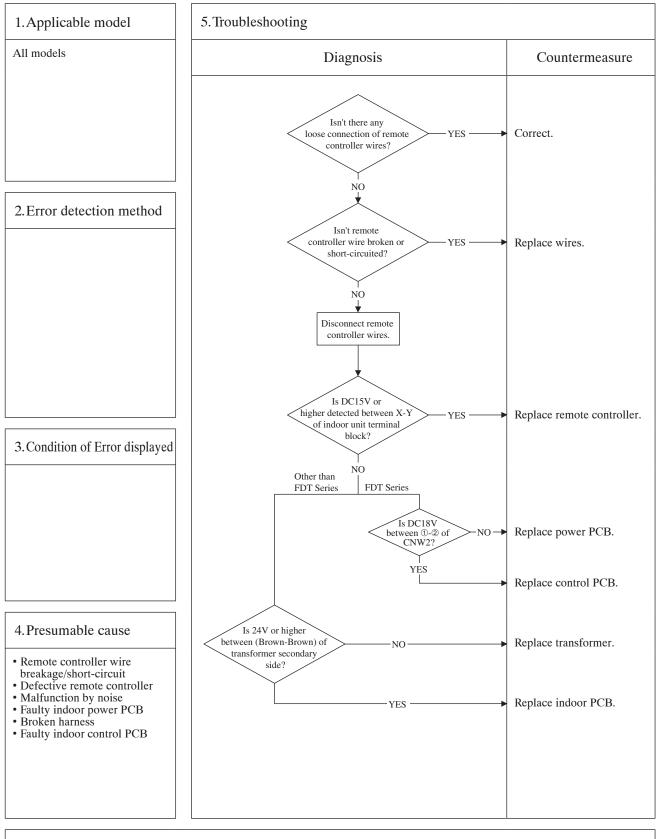


_					Q
μ	Error code	LED	Green	Red	Content
	Remote controller: INSPECT I/U	Indoor	Keeps flashing	Stays Off	
		Outdoor	Keeps flashing	2 times flash	(When1 or 2 remote controllers are connected)
L)				

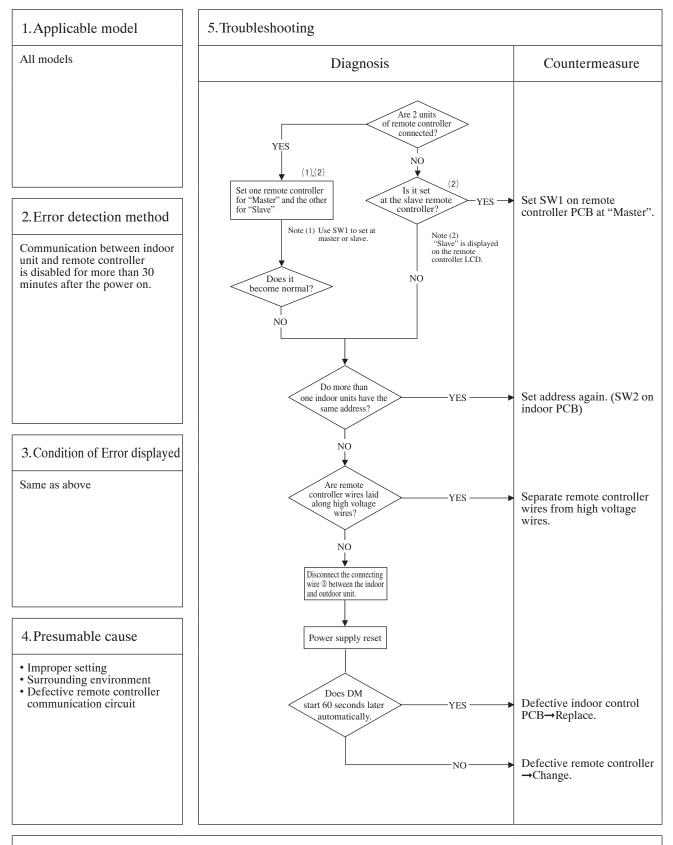

Note: If any error is detected 30 minutes after displaying ""WAIT"" on the remote controller, the display changes to "INSPECT I/U".


β	Error code	LED	Green	Red	Content
	Remote controller: INSPECT I/U	Indoor	Keeps flashing	Stays Off	INSPECT I/U
		Outdoor	Keeps flashing	2 times flash	(connection of 3 units or more remote controller)

A

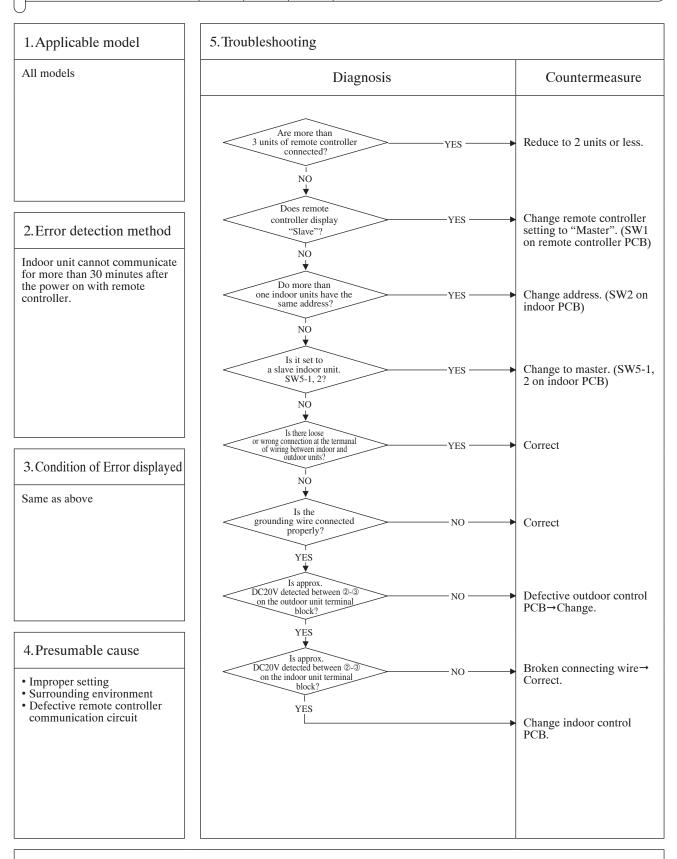



Note: If any error is detected 30 minutes after displaying ""WAIT"" on the remote controller, the display changes to "INSPECT I/U".

_					G
β	Error code	LED	Green	Red	Content
	Remote controller: (BWAIT (B	Indoor	Keeps flashing	Stays Off	
		Outdoor	Keeps flashing	2 times flash	(Model SRC40 - 60)
l					

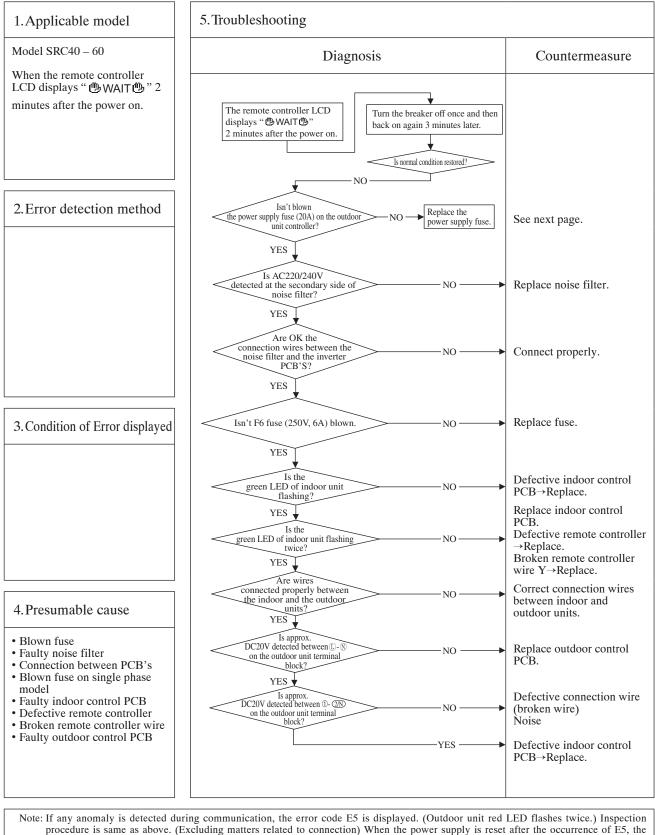


LED will display " @WAIT " if the anomaly continues. If the breaker ON/OFF is repeated in a short period of time (within 1 minute), " @WAIT " may be displayed. In such occasion, turn the breaker off and wait for 3 minutes.

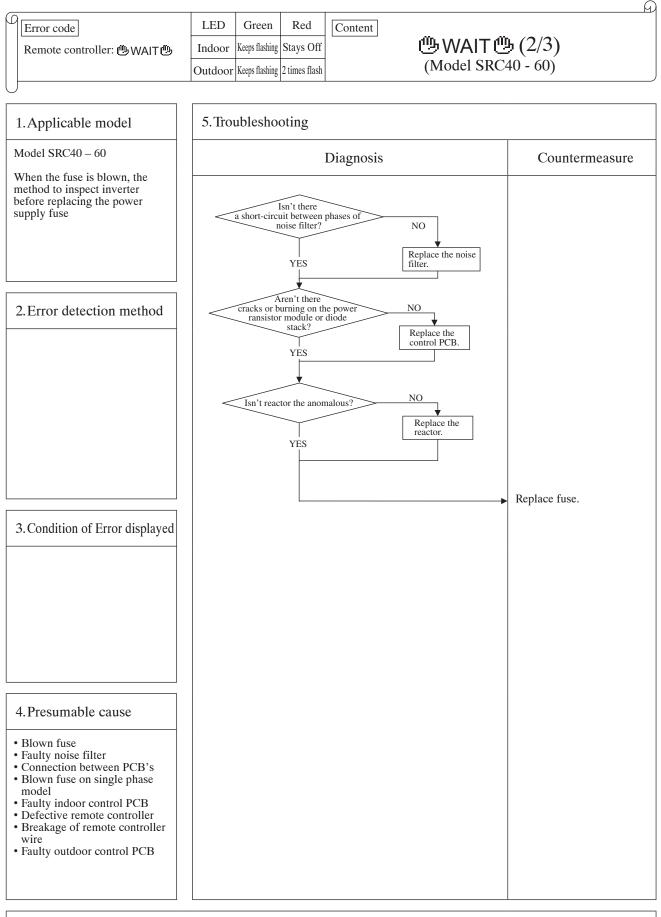


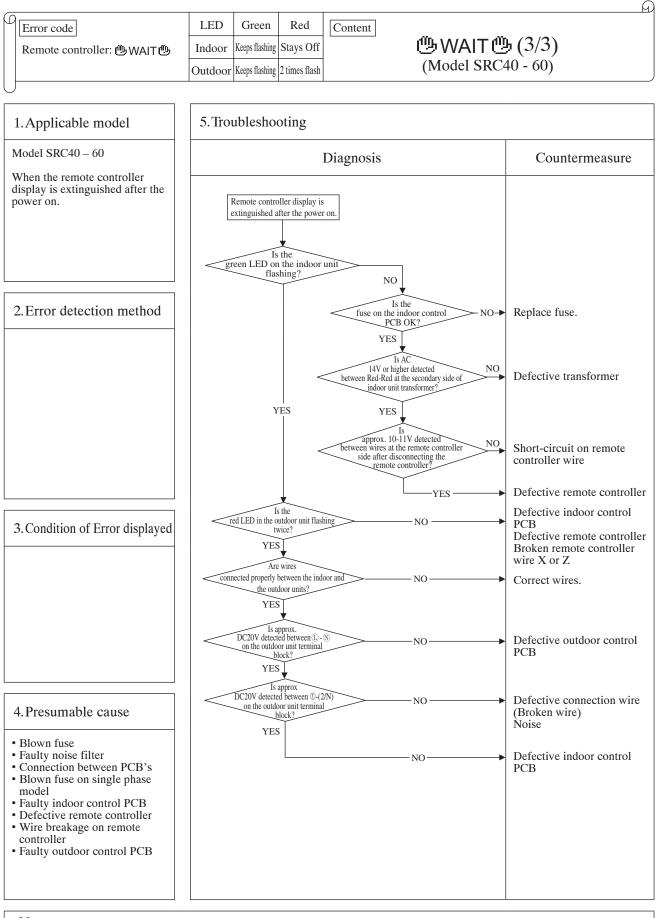


						Ð
P	Error code	LED	Green	Red	Content	
	Remote controller: (BWAIT (B	Indoor	Keeps flashing	Stays Off		
		Outdoor	Keeps flashing	2 times flash	(Model 71 - 250)	
L)				•	

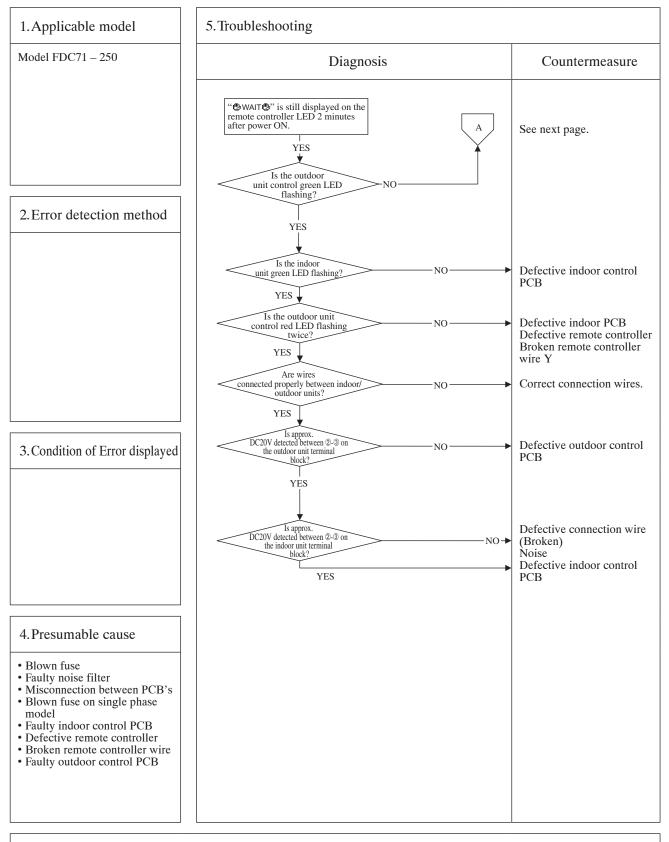


_					<u> </u>)
μ	Error code	LED	Green	Red	Content	
	Remote controller:	Indoor	Keeps flashing	Stays Off		
		Outdoor	Keeps flashing	2 times flash	(Model 71 – 250)	J
L)					

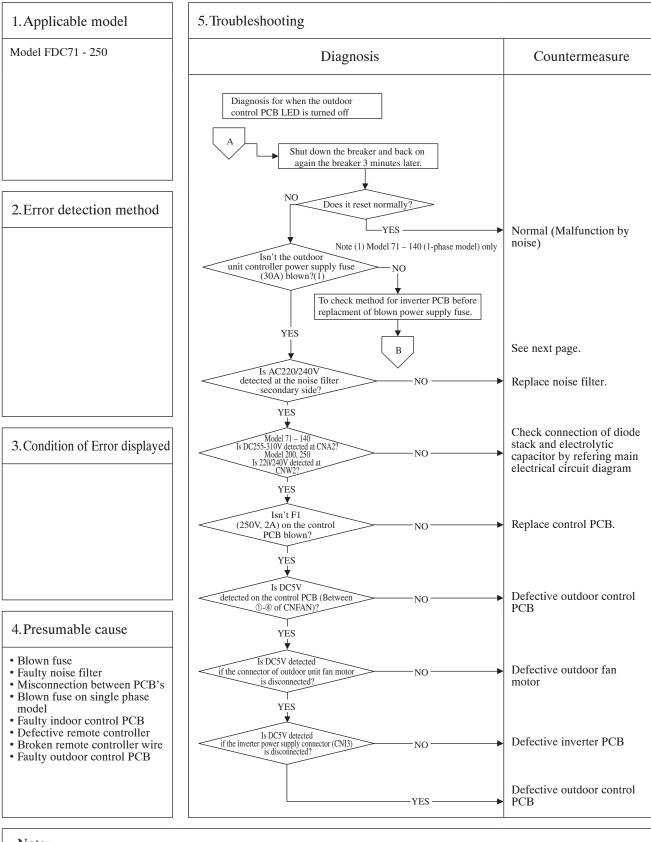


						Ð
F	Error code	LED	Green	Red	Content	
	Remote controller: (BWAIT (B	Indoor	Keeps flashing	Stays Off		
		Outdoor	Keeps flashing	2 times flash	(Model 71 – 250)	J
U	<u></u>					

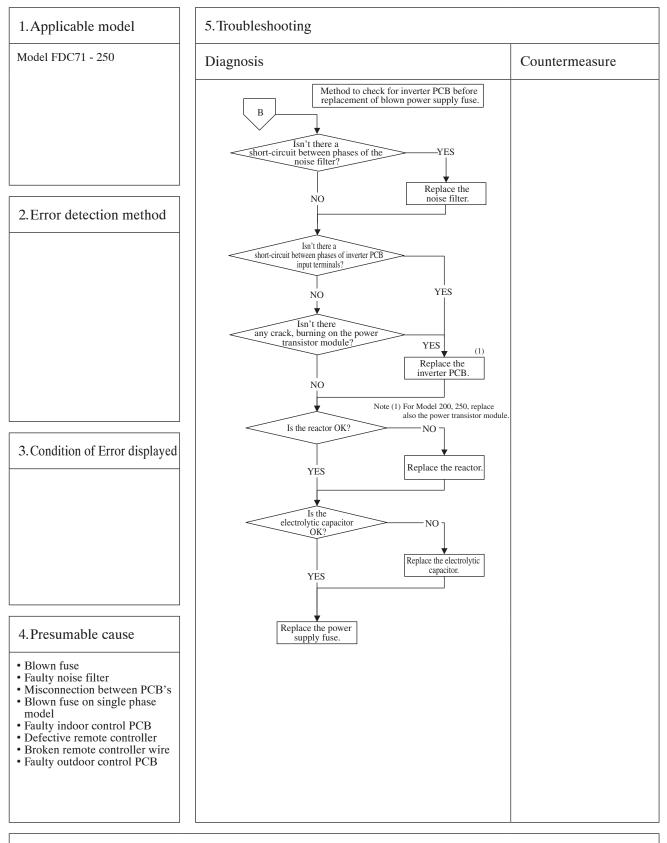



_					<u> </u>)
μ	Error code	LED	Green	Red	Content	
	Remote controller: None	Indoor	Keeps flashing	Stays Off	No display	
		Outdoor	Keeps flashing	2 times flash	(Model 71 – 250)	J
L)					

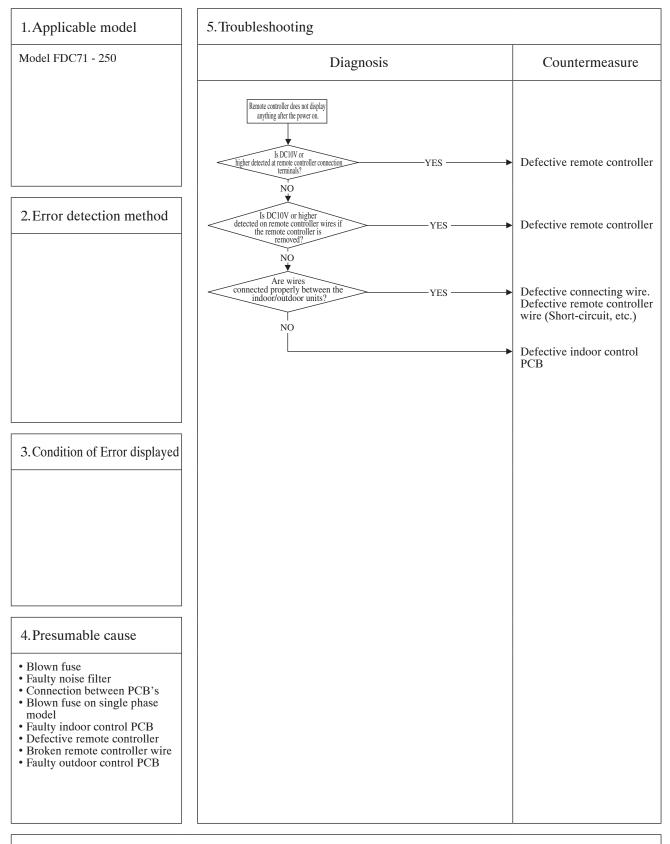

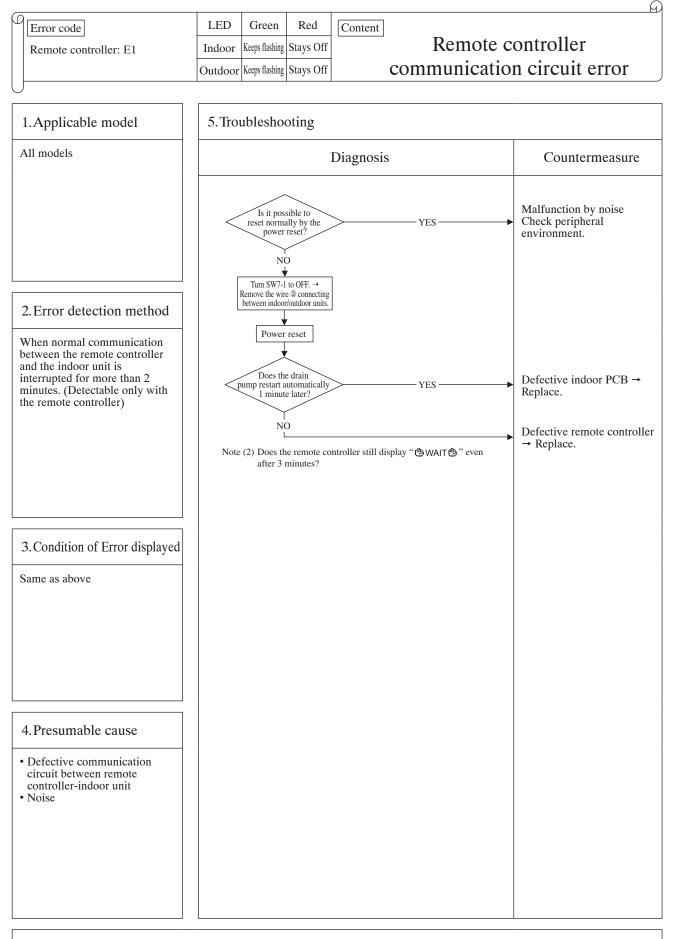



Note: If the indoor unit cannot communicate normally with the remote controller for 180 seconds, the indoor unit PCB starts to reset automatically.




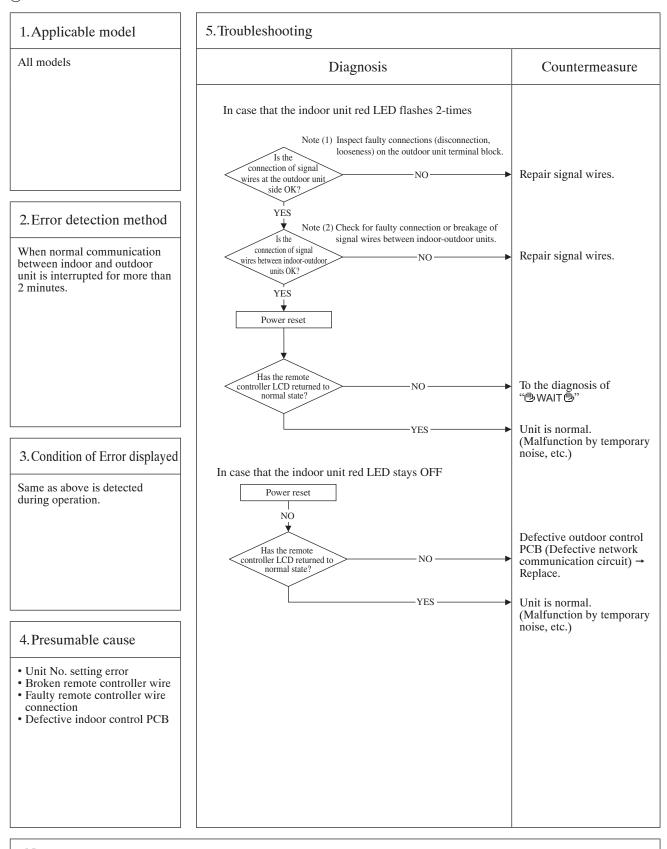



Note: Pressing the pump-down switch cancels communications between indoor and outdoor unit so that "communication error-E5" is displayed on indoor unit and remote controller, but it is normal.




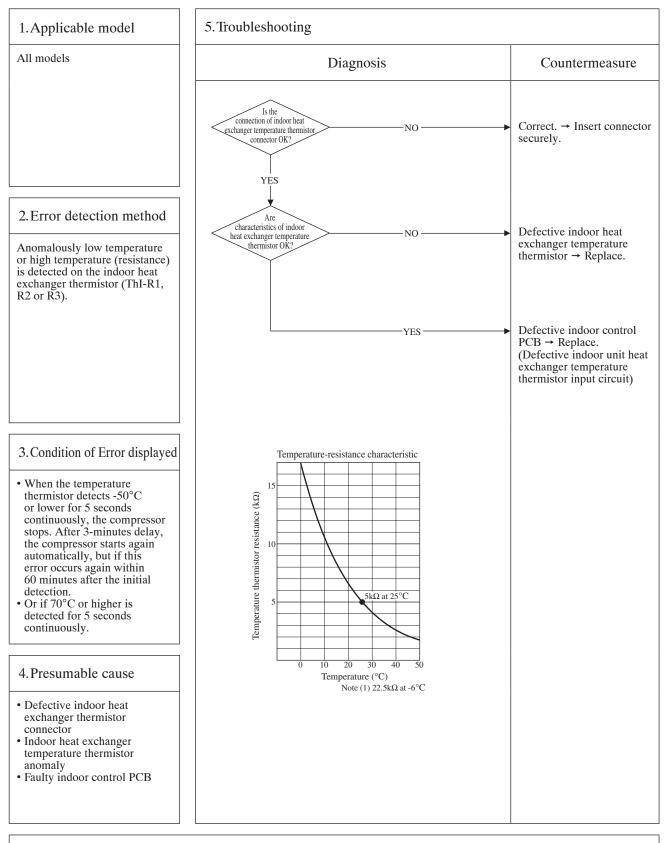



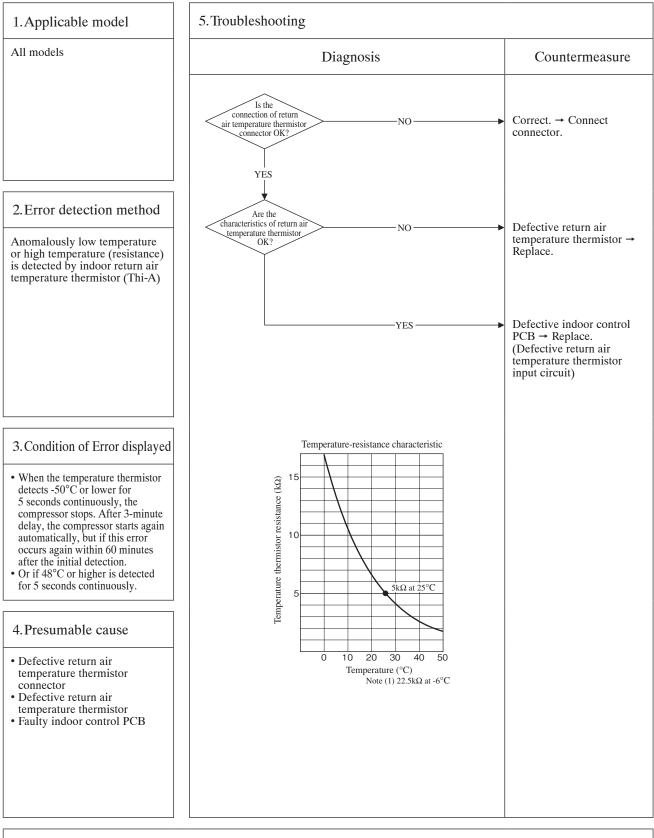




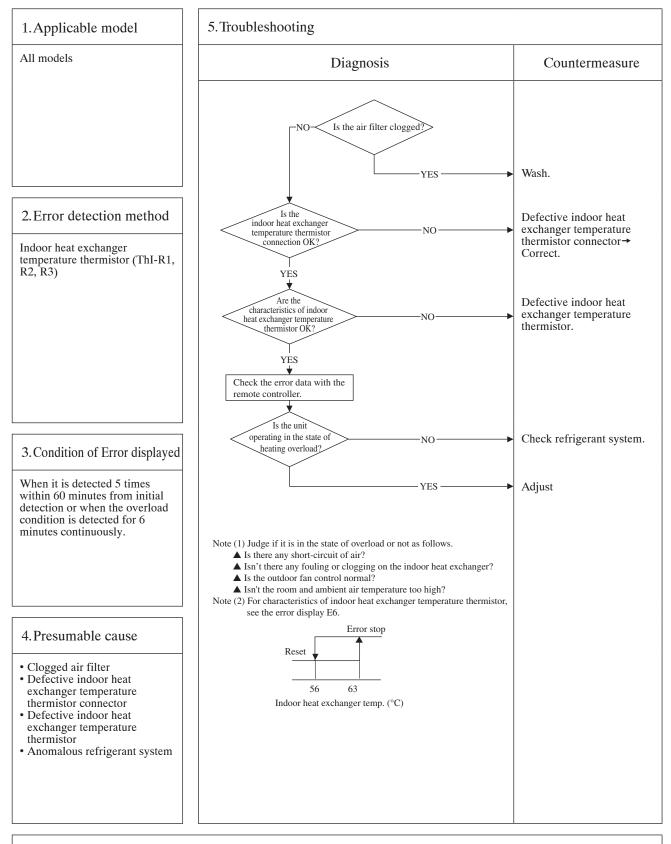


Note: During heating operation; After starting compressor, compressor rotation speed is decreased by detecting indoor heat exchanger temperature (Thi-R) in order to control high pressure.


_					G	D
ſ	Error code	LED	Green	Red	Content	
	Remote controller: E9	Indoor	Keeps flashing	1 time flash		
		Outdoor	Keeps flashing	Stays Off	(FDT and FDTC Series)	J
L	J					

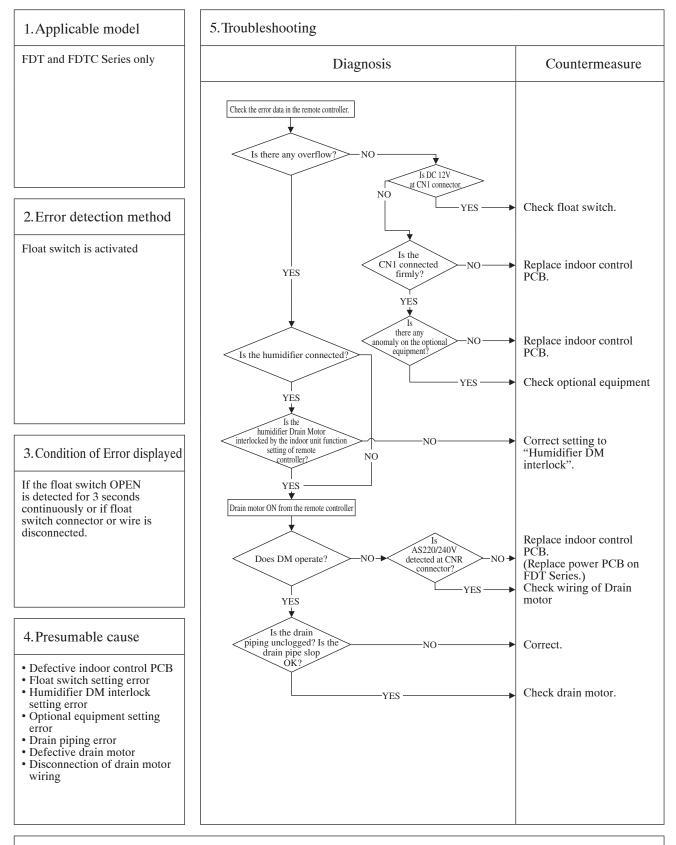


Note: When this error occurred at power ON, disconnection of wire or connector of the float switch is suspected. Check and correct it (or replace it, if necessary).


					9
(Error code	LED	Green	Red	Content Excessive number of connected
	Remote controller: E10	Indoor	Keeps flashing	Stays Off	
		Outdoor	Keeps flashing	Stays Off	by controlling with one remoto controller

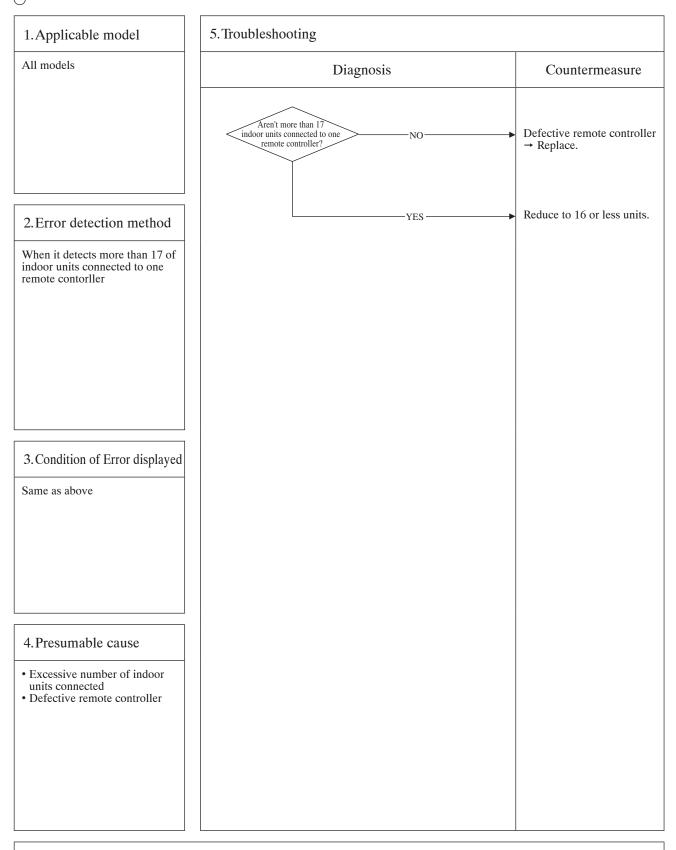





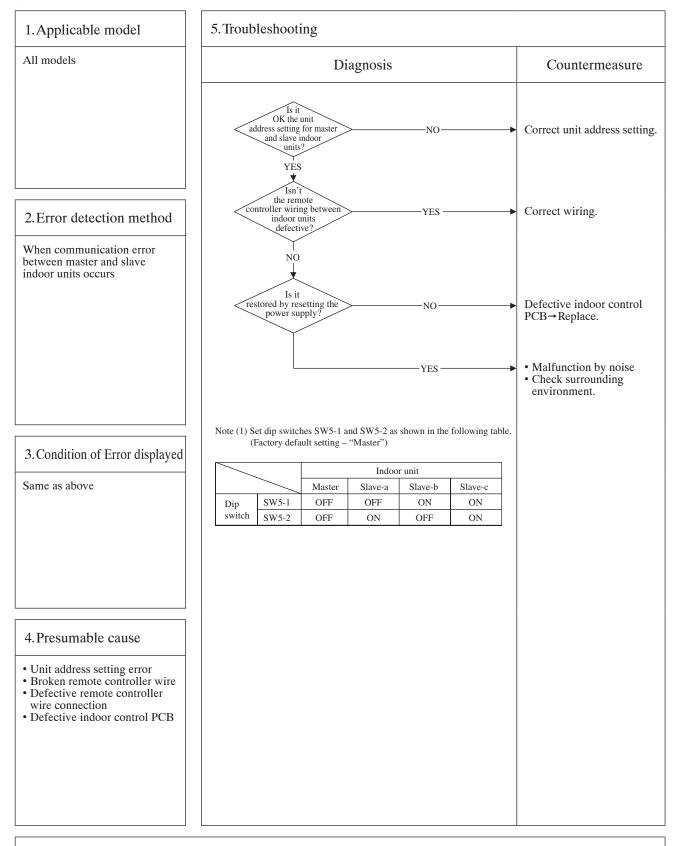





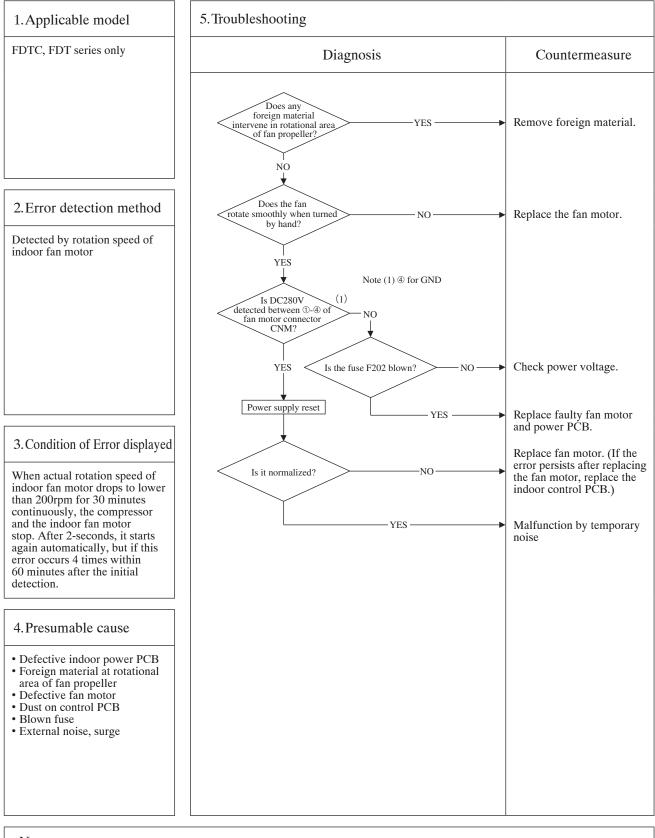



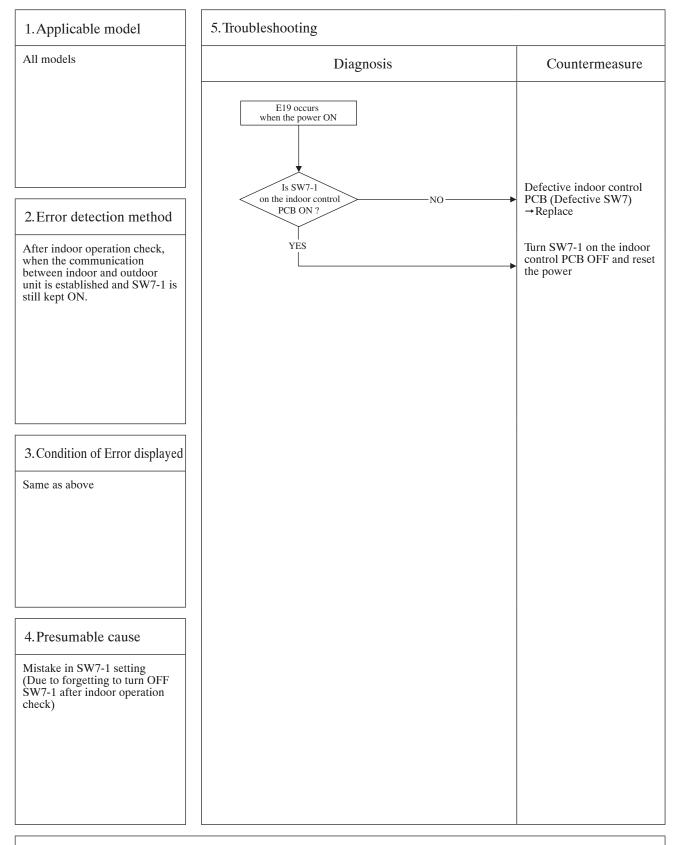




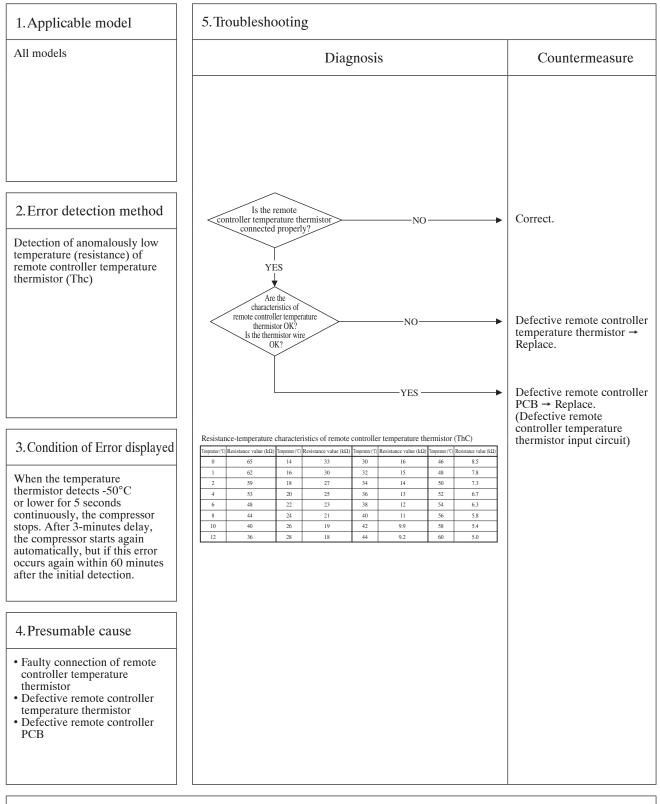



Note: After 10 seconds has passed since remote controller thermistor was switched from valid to invalid, E28 will not be displayed even if the thermistor harness is disconnected. At same time the thermistor, which is effective, is switched from remote controller thermistor to indoor return air temperature thermistor. Even though the remote controller thermistor is set to be Effective, the return air temperature displayed on remote controller for checking still shows the value detected by indoor return air temperature thermistor, not by remote controller temperature thermistor.


- 295 -


							0
-	Error cod	e	LED	Green	Red	Content	
	Remote c	ontroller: E33	Indoor	Keeps flashing	-	Inverter primary current error	
			Outdoor	_	8 times flash	(Model SRC40 – 60)	

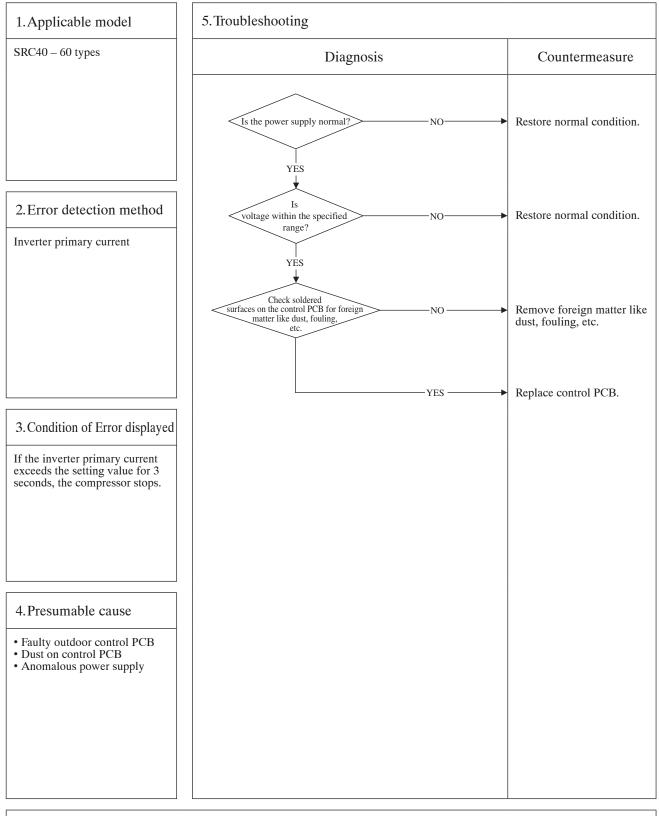



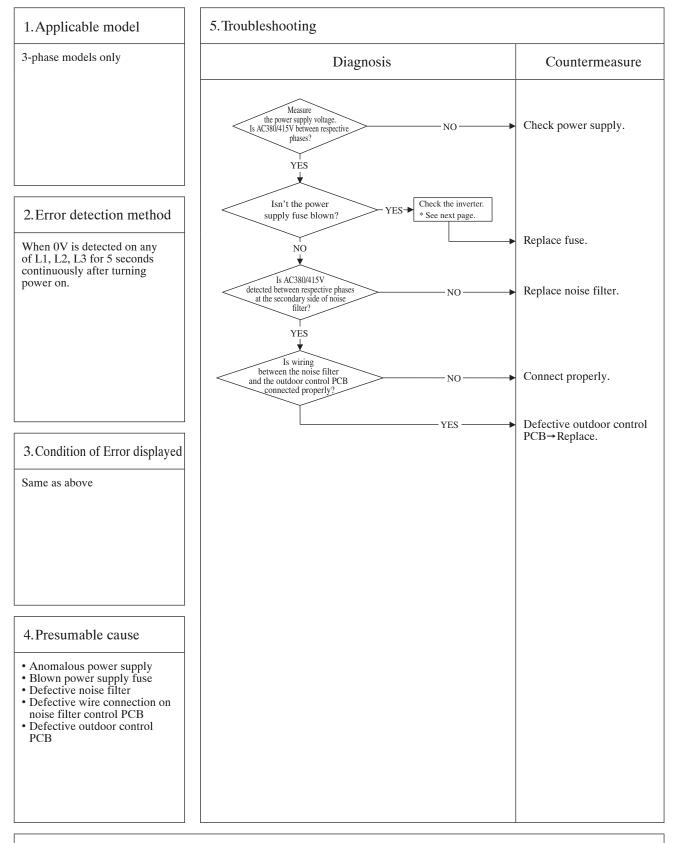





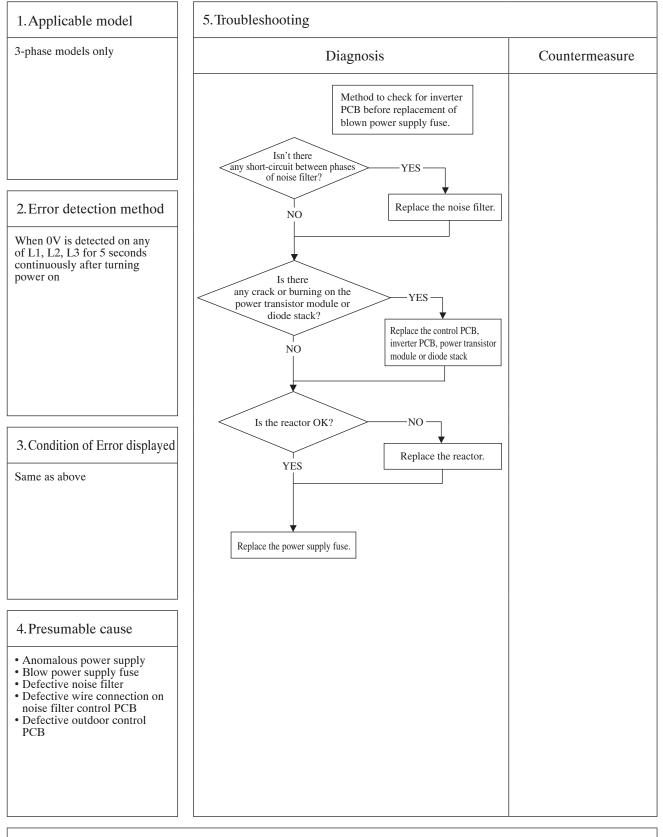



β	Error code	LED	Green	Red	Content
	Remote controller: E35	Indoor	Keeps flashing	Stays Off	Cooling overload operation
		Outdoor	_	8 times flash	(Model SRC40 - 60 only)


M

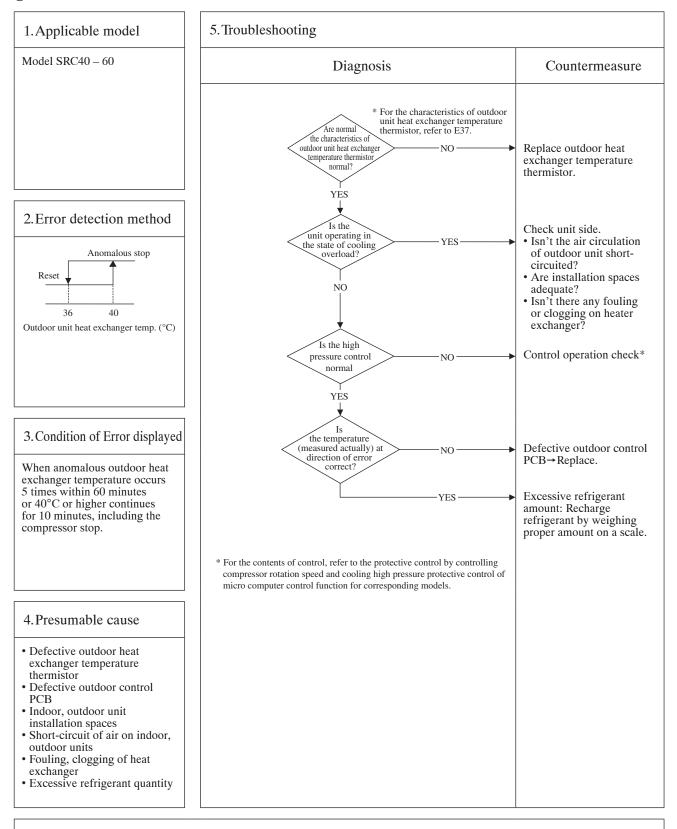




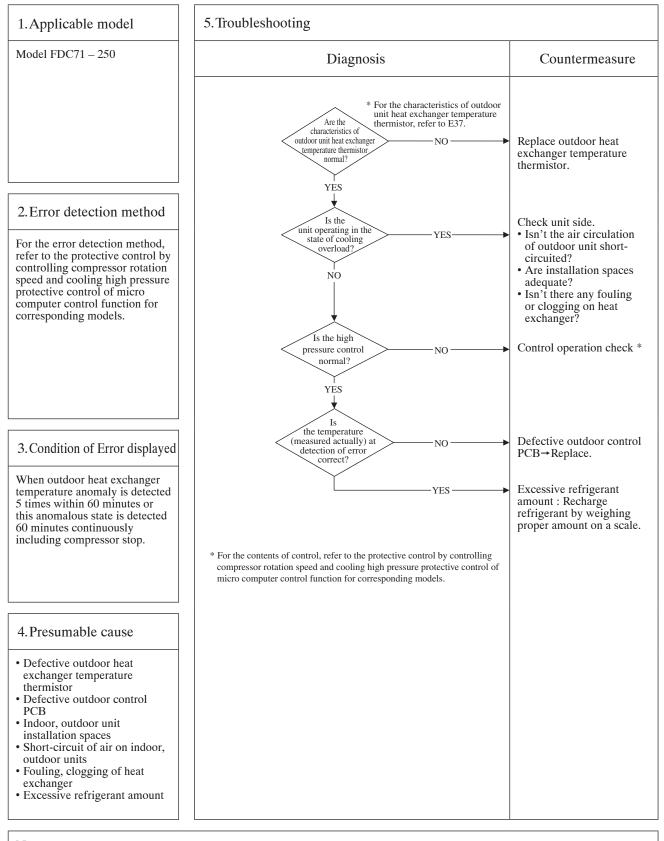


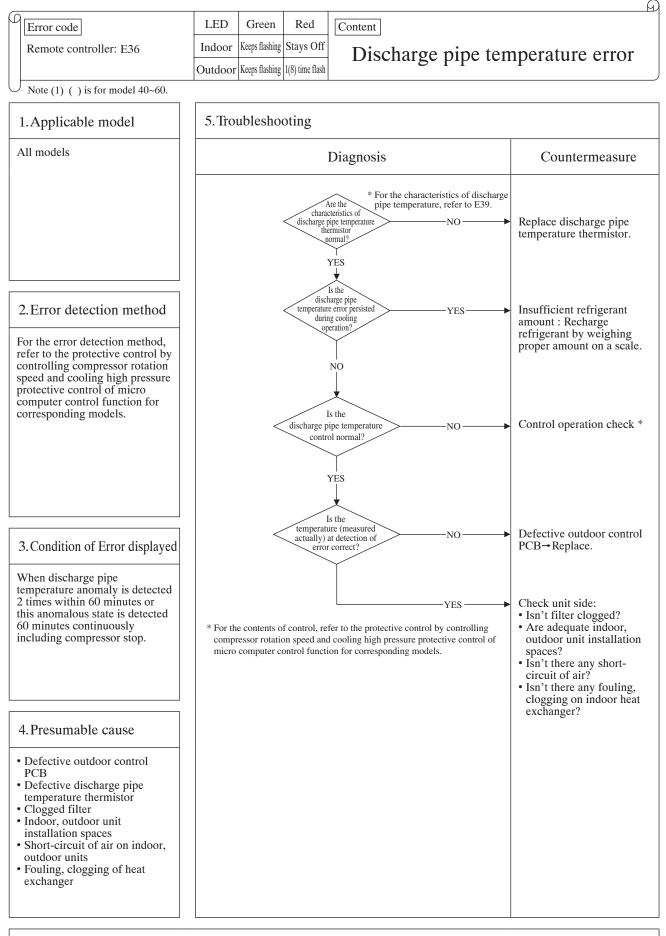


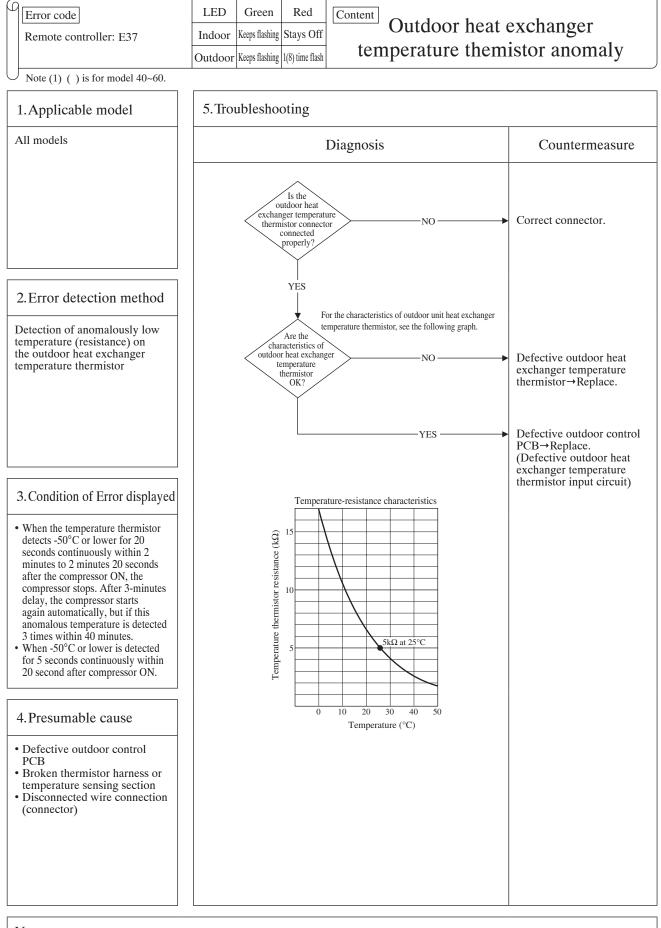


Ð

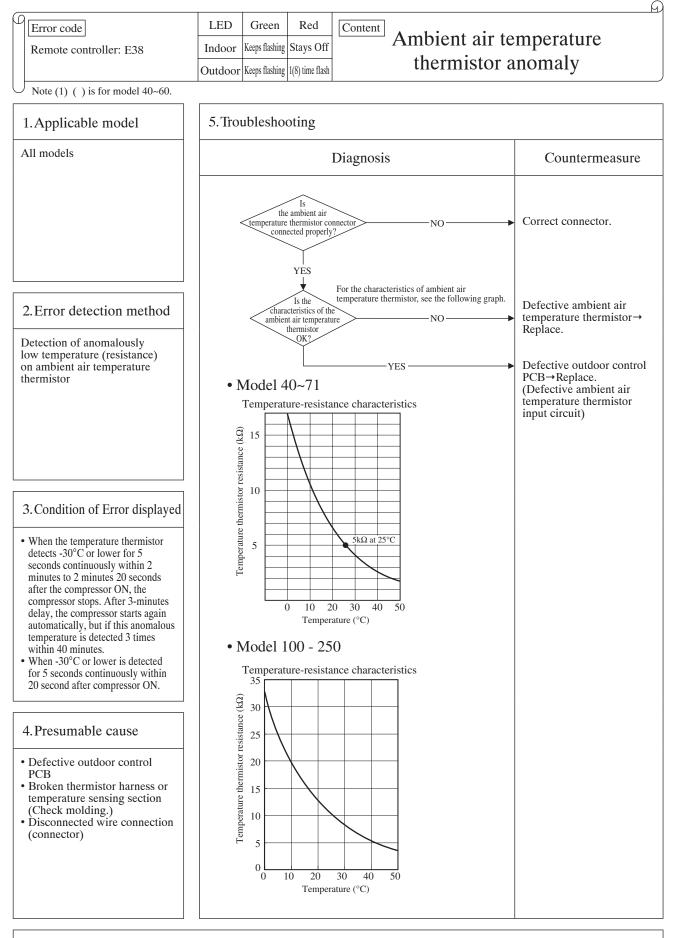


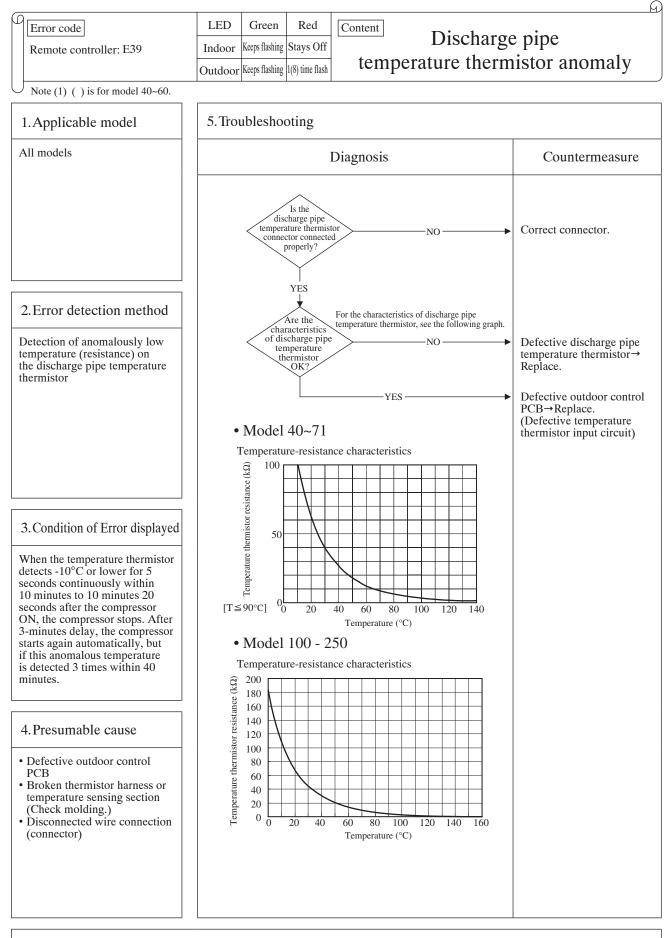


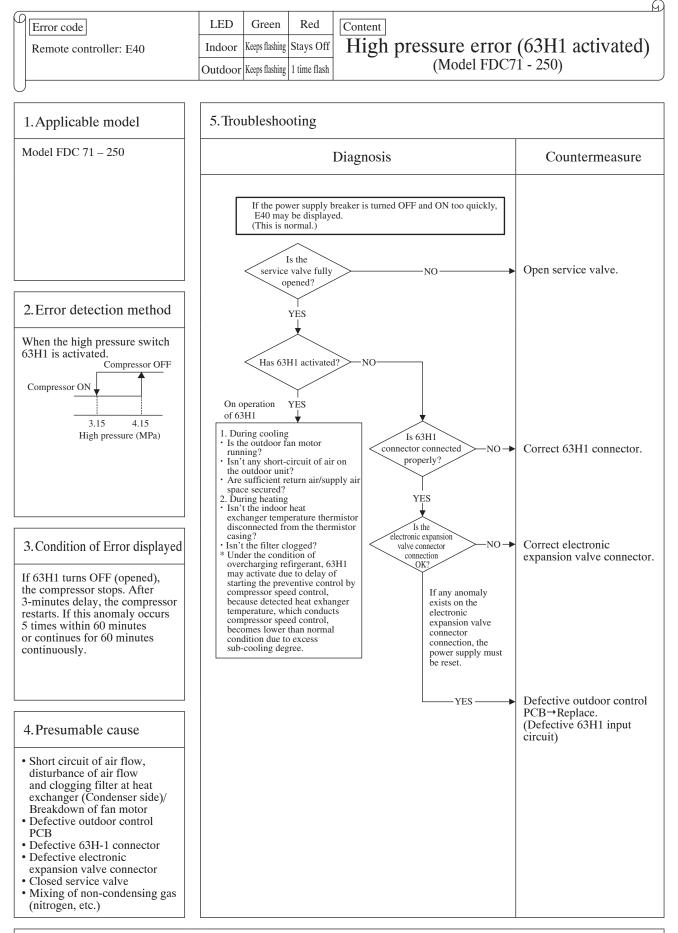


Note: In the protective control range for compressor startup (initial startup after power ON), even if 63H1 is activated only once (63H1turns OFF), immediately the error is displayed.




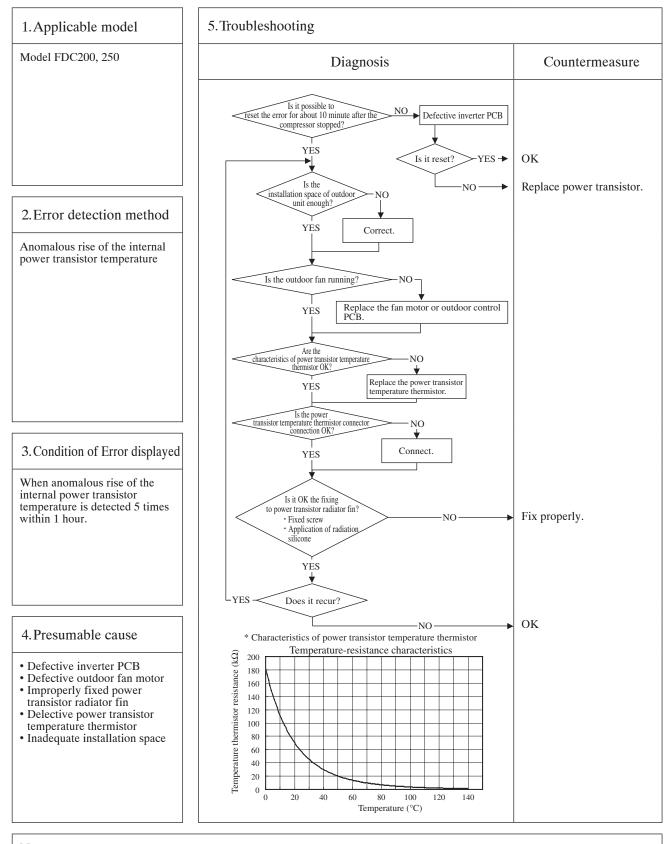

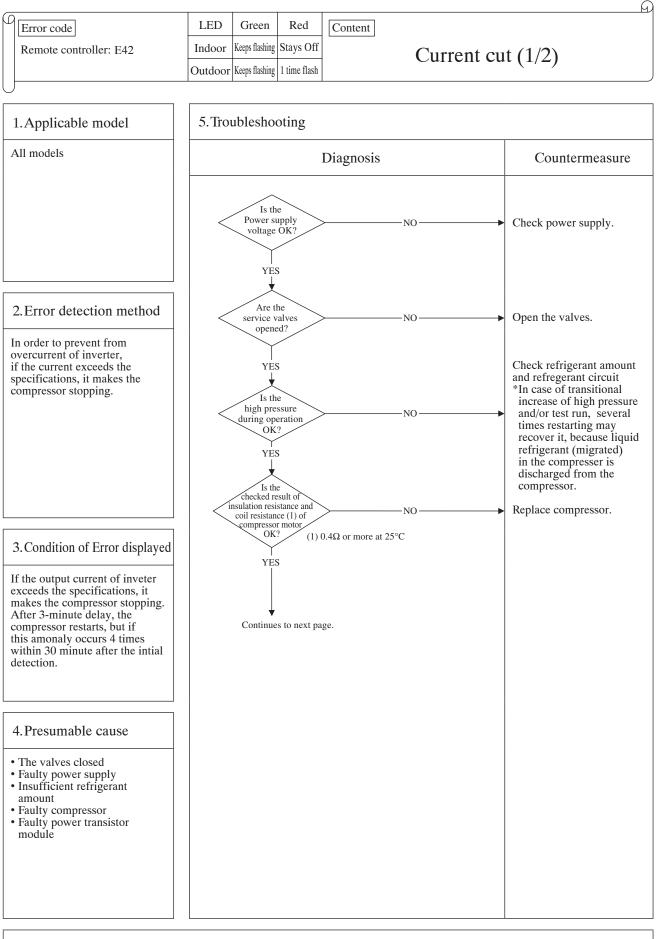


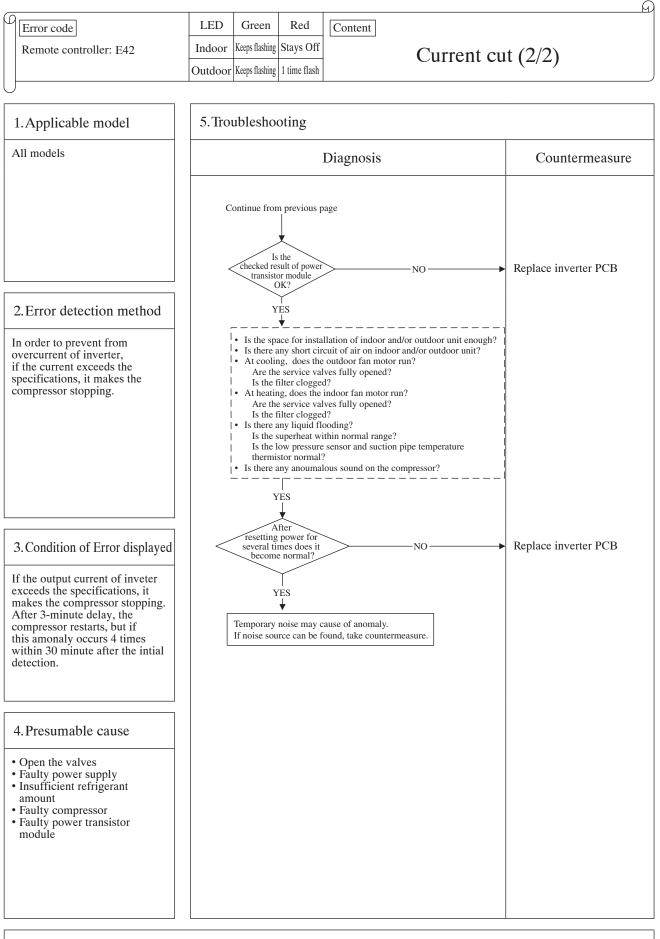

						Ø
ſ	Error code	LED	Green	Red	Content	
	Remote controller: E45	Indoor	Keeps flashing	Stays Off	Inverter communication error	
		Outdoor	Keeps flashing	1 time flash	(Model FDC71 - 250)	

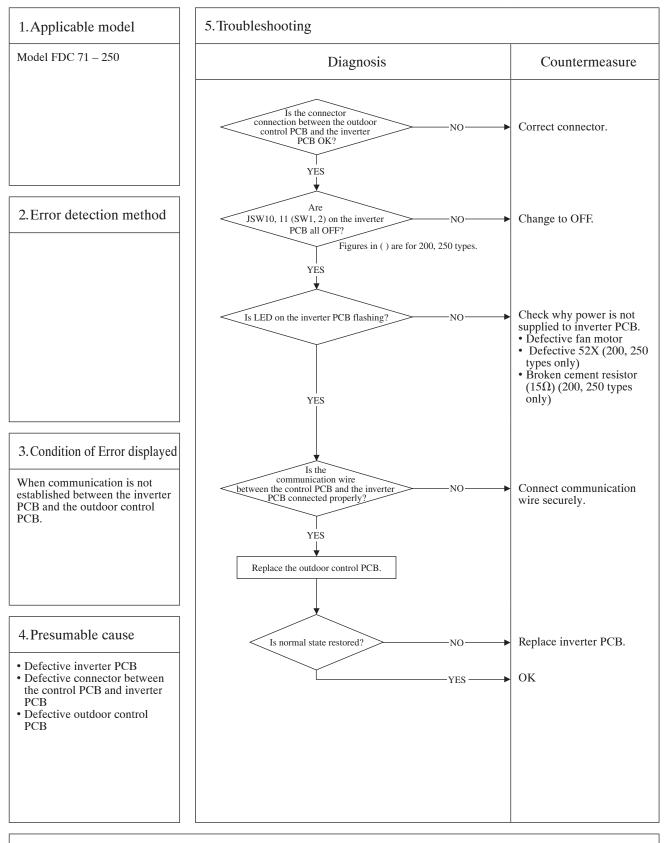


_					G
ſ	Error code	LED	Green	Red	Content
	Remote controller: E47	Indoor	Keeps flashing	Stays Off	Inverter over-current error
		Outdoor	_	1 time flash	(Model SRC40 – 60)

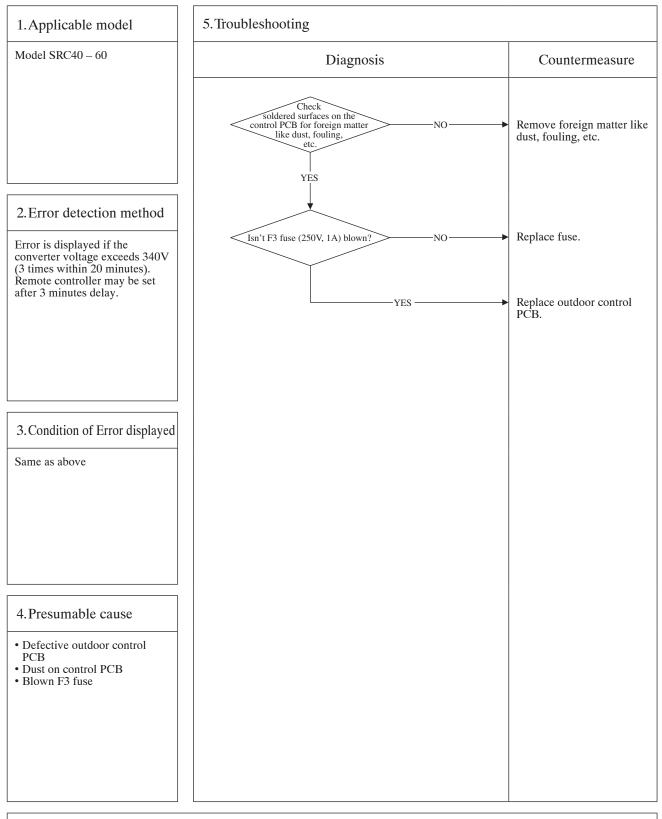


ſ	Error code	LED	Green	Red	Content
	Remote controller: E48	Indoor	Keeps flashing	Stays Off	Outdoor DC fan motor error
		Outdoor	_	Keeps flashing	(Model SRC40 - 60)


M

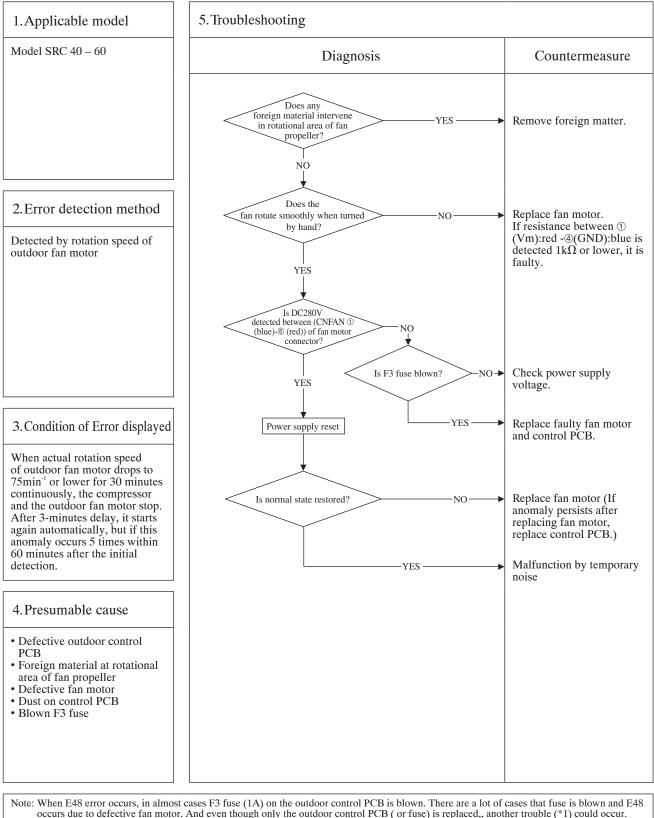


occurs due to defective fan motor. And even though only the outdoor control PCB (or fuse) is replaced,, another trouble (*1) could occur. Therefore when fuse is blown, check whether the fan motor is OK or not. After confirming the fan motor normal, check by power ON. (Don't power ON without confirming the fan motor normal.) *1 The error which does not seem to relate E48 may occur like as "BWAITB", Stay OFF of LED on outdoor control PCB, inverter

communication error (E45) and etc.




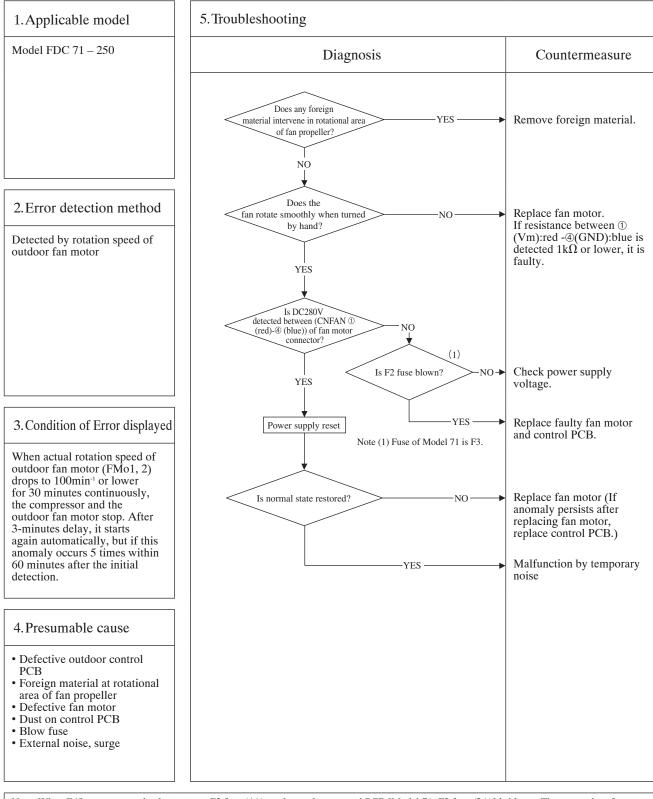


Note: When E48 error occurs, in almost cases F2 fuse (4A) on the outdoor control PCB [Model 71: F3 fuse (2A)] is blown. There are a lot of cases that fuse is blown and E48 occurs due to defective fan motor. And even though only the outdoor control PCB (or fuse) is replaced,, another trouble (*1) could occur. Therefore when fuse is blown, check whether the fan motor is OK or not. After confirming the fan motor normal, check by power ON. (Don't power ON without confirming the fan motor normal.) *1 The error which does not seem to relate E48 may occur like as "WWAIT b", Stay OFF of LED on outdoor control PCB, inverter communication error (E45) and etc.

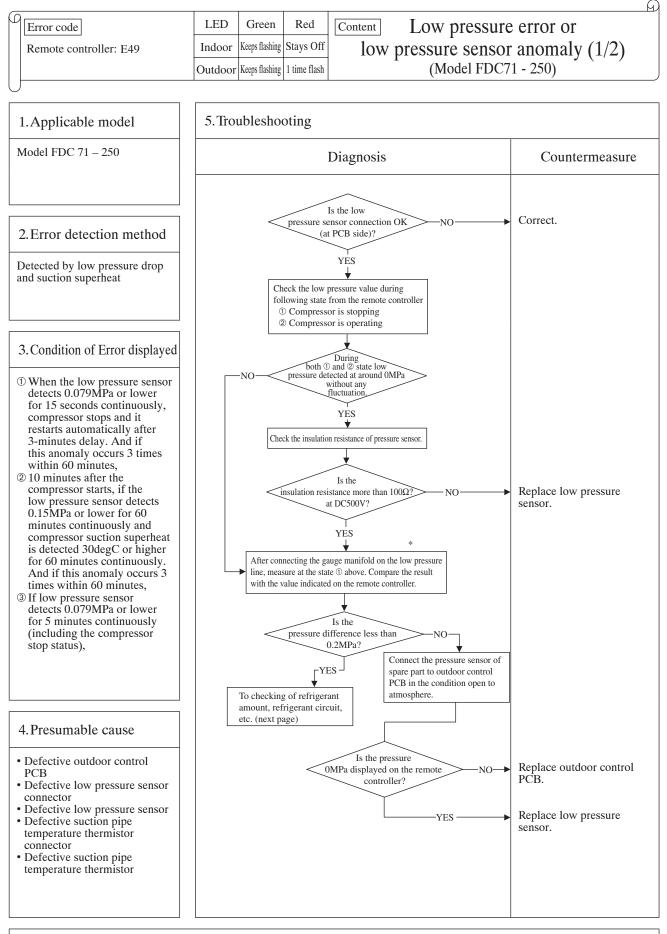


Note: * Connect the gauge manifold to the service valve check joint during cooling, or connect it to the check joint at internal piping of outdoor unit during heating.




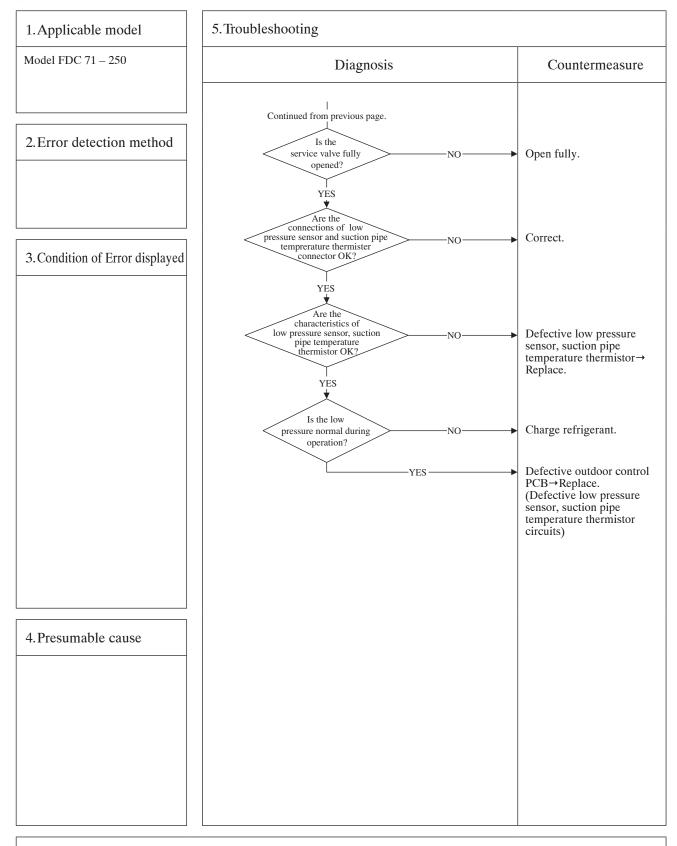


						Ð
ſ	Error code	LED	Green	Red	Content	
	Remote controller: E51	Indoor	Keeps flashing	Stays Off		
		Outdoor	Keeps flashing	1 time flash	(Model FDC71 - 250)	J

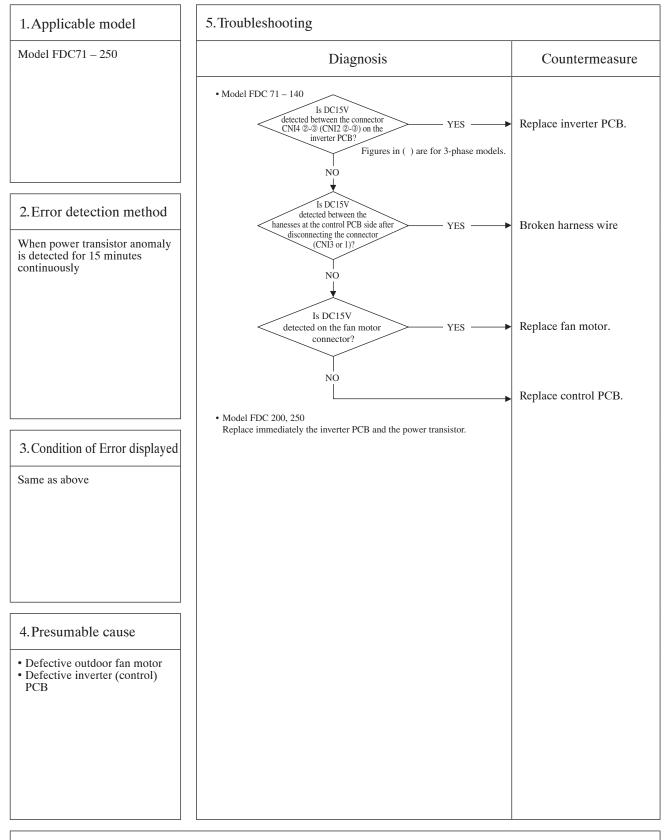


F	ŋ	Error code	LED	Green	Red	Content Suction pipe temperature
		Remote controller: E53	Indoor	Keeps flashing		
			Outdoor	Keeps flashing	1 time flash	(Model FDC71 - 250)

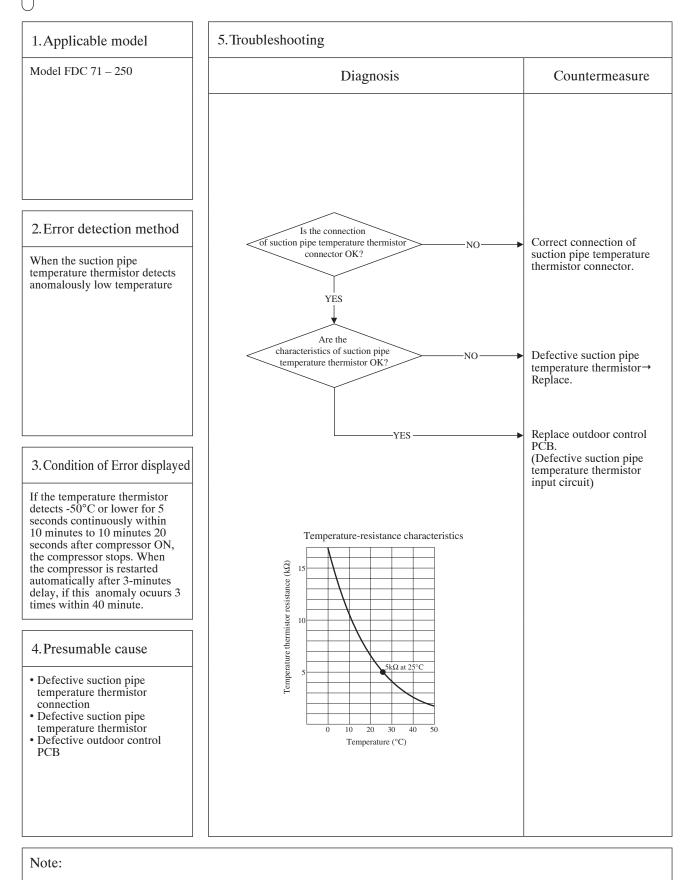


0




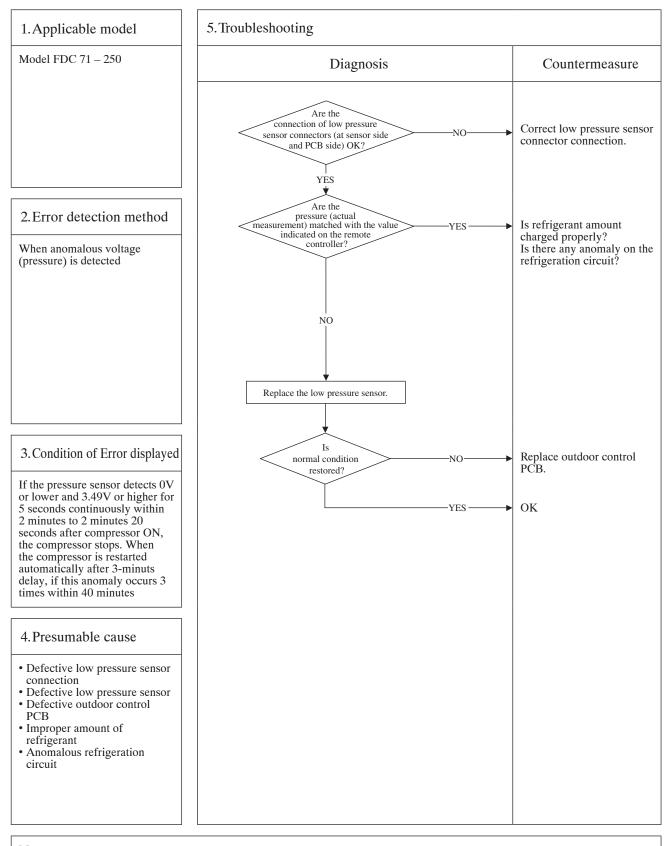

Note:



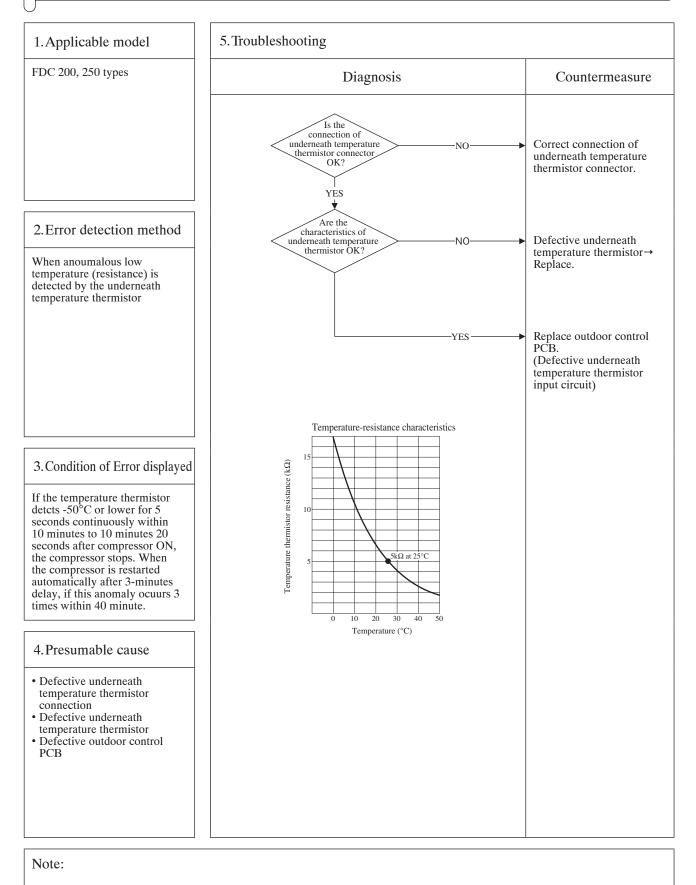


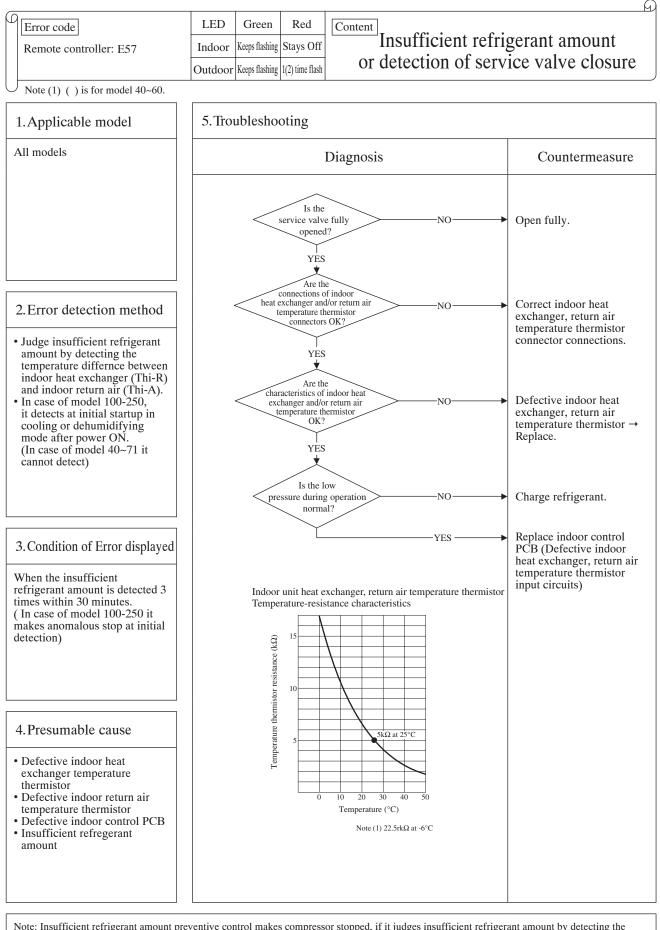

Note: Insufficient refrigerant amount preventive control makes compressor stopped, if it judges insufficient refrigerant amount by detecting the temperature difference between indoor heat exchanger (Thi-R) and indoor return air (Thi-A) for 1 minute after compressor ON in cooling or dehumidifying mode and for 9 minutes after compressor ON in heating mode. [in cooling mode: (Thi-A)-(Thi-R)>4degC, in heating mode: (Thi-A)-(Thi-A)<4degC]


F	9	Error code	LED	Green	Red	Content
		Remote controller: E59	Indoor	Keeps flashing	Stays Off	Compressor startup failure
			Outdoor	_	2 times flash	(Model SRC40~60)


M

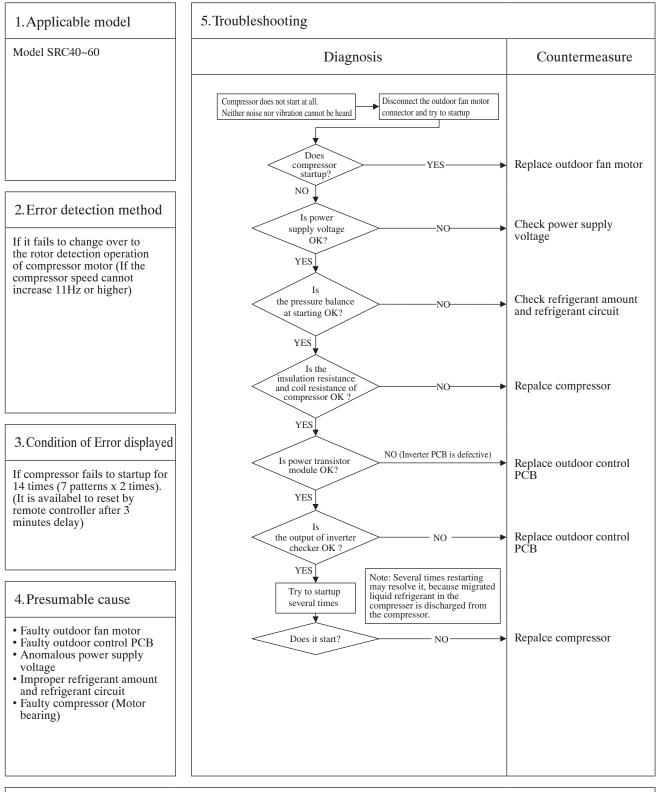

Note: Insulation resistance • The unit is left for long period without power supply or soon after installation, migrated liquid refrigerant may dissolve in the refrigerant oil in the compressor. In such case insulation resistance decreases upto several M\Omega or lower. If the electric leakage breaker is activated due to low insulation resistance, check followings.


- Check whehter the insulation resistance can recover or not, ater 6 hours has passed since power ON. (By energize the crankcase heater, migrated liquid refrigerant in the refrigerant oil in compressor can be evaporated)
 Check whether the electric leakage breake conforms to high-hermonic specifications (As units has inverter, in order to prevent from improper operation, be sure to use high-hermonic one.)



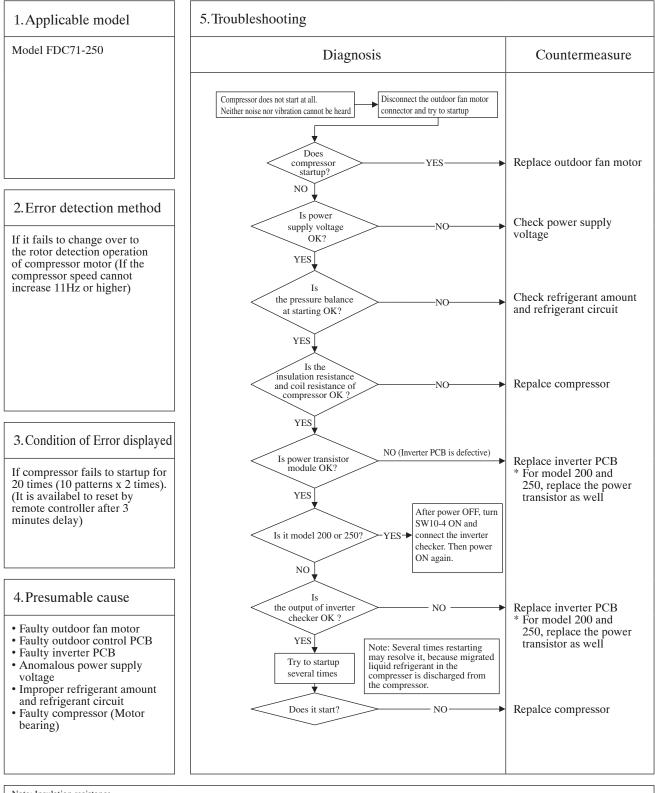

Note: Insulation resistance • The unit is left for long period without power supply or soon after installation, migrated liquid refrigerant may dissolve in the refrigerant oil in the compressor. In such case insulation resistance decreases upto several M Ω or lower. If the electric leakage breaker is activated due to low insulation resistance, check followings.

- Check whehter the insulation resistance can recover or not, ater 6 hours has passed since power ON. (By energize the crankcase heater, migrated liquid refrigerant in the refrigerant oil in compressor can be evaporated)
 Check whether the electric leakage breake conforms to high-hermonic specifications (As units has inverter, in order to prevent from improper operation, be sure to use high-hermonic one.)

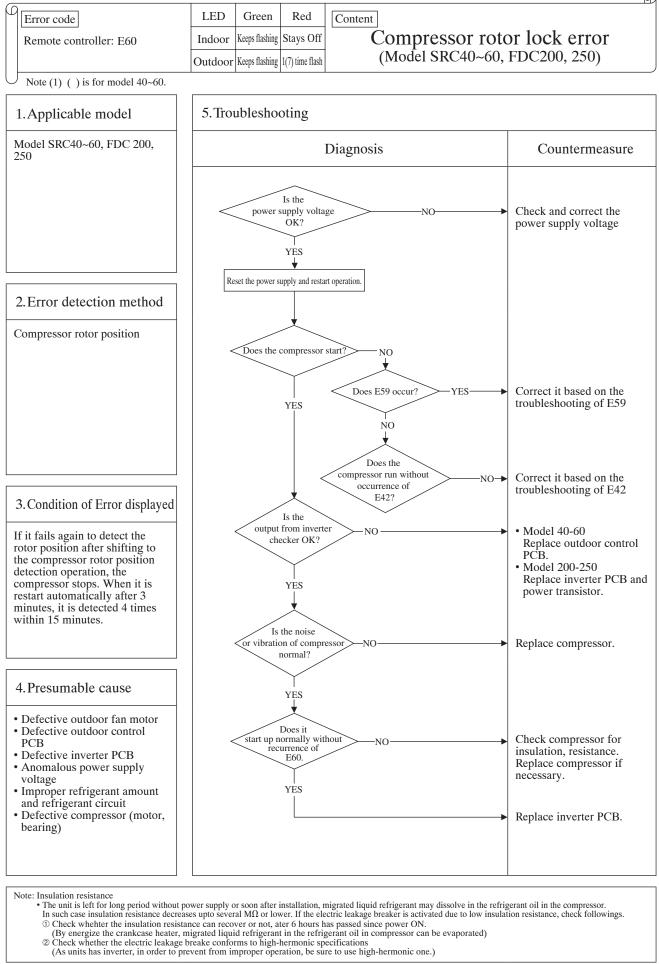

Ð

2. MULTI-TYPE (V MULTI) PACKAGED AIR-CONDITIONER

CONTENTS

2.1 GENERAL INFORMATION	
2.1.1 Specific features	
2.1.2 How to read the model name	
2.1.3 Table of models	
2.1.4 Table of system combinations	
2.2 SELECTION DATA	
2.2.1 Specifications	
(1) Indoor unit	
(a) Ceiling cassette-4way Compact (600 \times 600mm)-type (FDTC)	
(b) Ceiling cassette-4way-type (FDT)	
(c) Ceiling suspended type (FDEN)	
(d) Duct connected-Middle static pressure-type (FDUM)	
(2) Outdoor unit	
(3) Operation chart	
2.2.2 Range of usage & limitations	
2.2.3 Exterior dimensions	
2.2.4 Exterior appearance	
2.2.5 Piping system	
2.2.6 Selection chart	
2.2.7 Characteristics of fan	
2.2.8 Noise level	
2.3 ELECTRICAL WIRING	
2.4 OUTLINE OF OPERATION CONTROL BY MICROCOMPUTER	
2.5 APPLICATION DATE	
2.6 MAINTENANCE DATE	

2.1 GENERAL INFORMATION

2.1.1 Specific features

Ideal for the installation in Large, single zone open Areas and L-shaped rooms, the Muliti-Type V series allows an extensive degree of flexibility in the selection of indoor units. Specifically, the selection of indoor units with differing capacities and differing or similar types is available, as is the selection of indoor units with similar capacities and differing types. Furthermore, a maximum of up to four individual indoor units can be opened with a single outdoor unit.

- (1) All models employ R410Å, with RoHS compliance.
- (2) Industry leading COP.

Thanks to achievement of the highest COP level in the industry, the energy consumption has been cut by 39~49% compared with our former models (constant speed models).

- (3) Energy labeling "Class A"
- MHI models have cleared the class A standard, the highest energy saving level, with their high COP (coefficient of performance).
 (4) The microcomputer chip is installed in the indoor unit and outdoor unit. There is no need for the unit to communicate between the outdoor and indoor units so the unit is more resistant to electromagnetic noise thus the incidence of microcomputer malfunction has been reduced. The compressor in the outdoor unit has its own self protection function, that reacts according to abnormal high pressure and excessive high temperature.
- (5) Wide range of operation


Heating and cooling operation at -15° C Our new advanced technology has expanded the heating and cooling operation range. This permits installation of the units considering a heating and cooling operation under a low ambient temperature condition down to -15° C.

(6) New remote control for all indoor units

Applying nonpolar 2-core in new remote control line, it is very convenient for installation including renewal case.

- (7) There are only three power lines between the outdoor and indoor unit. One cabtyre cable with 3 wires encased in one sheath is enough for conducting the wiring work between the outdoor unit and the indoor unit. This contributes to simpler wiring work in the field.
- (8) All air supply ports have auto swing louvers. (Only case of FDTC, FDT and FDEN models). The indoor fan motor has three speeds of high, medium and low.
- (9) All models have service valves protruding from the outdoor unit for faster flare connection (FDC200, 250: Only a gas side is brazing) work in the field.
- (10) The size and weight of the outdoor units in the FDC71 series have been greatly reduced.Use of an inverter has also improved energy conservation and economy.
- (11) Compared to the previous models, a single fan is used in the FDC $100 \sim 140$ outdoor unit models and forward blowing is used in the 802 and 1002 models, resulting in markedly reduced weight and greater compactness. In addition, use of an inverter makes these units much more economical compared to the previous fixed speed units.

2.1.2 How to read the model name

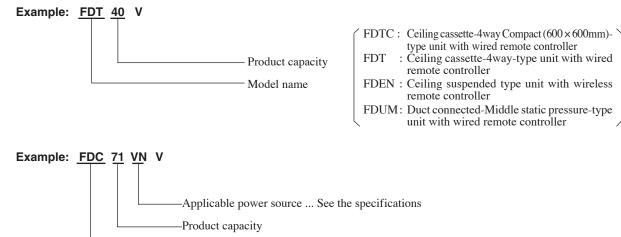

-----Model name (FDC: Outdoor unit)

2.1.3 Table of models

Model	40	50	60	71	100	125
Ceiling cassette-4way Compact (600 x 600mm)-type (FDTC)	0	0				
Ceiling cassette-4way-type (FDT)	0	0	0	0	0	0
Ceiling suspended type (FDEN)	0	0	0	0	0	0
Duct connected-Middle static pressure-type (FDUM)		0	0	0	0	0
Outdoor unit to be combined (FDC)	FDC71VN (3 Horse Power) FDC100VN FDC100VS (4 Horse Power)	FDC125VN FDC125VS (5 Horse Powe	FDC140V FDC140V er) (6 Horse P	S (8 Hors		C250VS Horse Power)

2.1.4 Table of system combinations

Outdoor unit	Туре	Indoor unit assembly capacity	Branch pipe set (Optional)	
FDC71VN		40+40		
FDC100VN FDC100VS	Twin	50+50	DIS-WA1	
FDC125VN FDC125VS		60+60 50+71		
FDC140VN	Twin	71+71		
FDC140VS	Triple	50+50+50	DIS-TA1	
	Twin	100+100	DIS-WB1	
		71+125	DI3-WB1	
FDC200VS	Triple	71+71+71	DIS-TB1	
	Double twin	50+50+50+50	DIS-WA1 x 2set DIS-WB1 x 1set	
	Twin	125+125	DIS-WB1	
	Triple	60+60+125 DIS-TI		
FDC250VS	inpie	71+71+100		
	Double twin	60+60+60+60	DIS-WA1 x 2set DIS-WB1 x 1set	

Notes (1) It is possible to used different models (FDT, FDEN, FDUM) when combining indoor units.

(2) Always use the branch piping set (optional) at branches in the refrigerant piping.(3) If wireless specifications are used, use 1 wireless indoor unit in combination with wired indoor units.

Exception: In case of FDTC, FDKNVA series are selected, same model and capacity combination is required.

2.2 SELECTION DATA

2.2.1 Specifications

(1) Indoor unit

(a) Ceiling cassette-4way Compact (600 × 600mm)-type (FDTC)

Models FDTC40V, 50V

Item	Model	FDTC40V	FDTC50V	
Nominal cooling capacity ⁽¹⁾	kW	4.0	5.0	
Nominal heating capacity ⁽¹⁾	kW	4.5	5.4	
Power source		1 Phase, 220-24	0V 50Hz / 220V 60Hz	
Noise level	dB(A)	Hi: 42 Me : 38 Lo: 35		
Exterior dimensions Height × Width × Depth	mm	Unit:248 × 570 × 570 Panel:35 × 700 × 700		
Net weight	kg	18.5 (Unit:	15 Panel: 3.5)	
Refrigerant equipment Heat exchanger		Louver fin &	t inner grooved tubing	
Refrigerant control			_	
Air handling equipment Fan type & Q'ty		Turbo fan $\times 1$		
Motor	W	52×1		
Starting method		Direct line start		
Air flow(Standard)	СММ	Hi: 11.5 Me : 10 Lo: 8		
Outside air intake		Not	possible	
Air filter, Q'ty		Pocket plastic	net $\times 1$ (Washable)	
Shock & vibration absorber		Rubber sleev	ve (for fan motor)	
Operation control Operation switch			switch (Optional: RC-E3) kit (Optional)	
Room temperature control		Thermostat	by electronics	
Safety equipment		Overload prote Frost protect	ction for fan motor. ction thermostat.	
Installation data Refrigerant piping size	mm(in)		e:	
Connecting method		Flar	e piping	
Drain hose		Connectable with VP20 (I.D.20 mm, O.D.26 mm)		
Insulation for piping		Necessary (both Liquid & Gas lines)		
Accessories		Mounting	kit. Drain hose	
Optional parts		Decorative Panel		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Ctore donado
Operation	DB	WB	DB	WB	Standards
Cooling	27℃	19°C	35°C	24℃	ISO-T1
Heating	20	°C	7 °C	6 °C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

Item	Panel Part No.	Wireless kit
FDT40V, 50V	TC-PSA-24W-ER	RCN-TC-24W-ER

(b) Ceiling cassette-4way-type (FDT)

Models FDTA40V, 50V, 60V

Item	Model	FDT40V	FDT50V	FDT60V	
Nominal cooling capacity ⁽¹⁾	kW	4.0	5.0	5.6	
Nominal heating capacity ⁽¹⁾	kW	4.5	5.4	6.7	
Power source		16	Phase, 220-240V 50Hz / 220V 60H	l lz	
Noise level	dB(A)	Hi: 33 Me :	31 Lo: 30	Hi: 33 Me : 31 Lo: 30	
Exterior dimensions Height × Width × Depth	mm		Unit:246 × 840 × 840 Panel:35 × 950 × 950	I	
Net weight	kg	27.5 (Unit: 22 Panel: 5.5)	29.5 (Unit: 24	4 Panel: 5.5)	
Refrigerant equipment Heat exchanger			Louver fin & inner grooved tubing		
Refrigerant control			_		
Air handling equipment Fan type & Q'ty			Turbo fan $\times 1$		
Motor	w	50×1			
Starting method		Direct line start			
Air flow(Standard)	СММ	Hi: 18 Me : 16 Lo: 14			
Outside air intake			Possible		
Air filter, Q'ty			Pocket plastic net \times 1 (Washable)		
Shock & vibration absorber			Rubber sleeve (for fan motor)		
Operation control Operation switch		Wired	d remote control switch (Optional: RC Wireless kit (Optional)	C-E3)	
Room temperature control			Thermostat by electronics		
Safety equipment			Overload protection for fan motor. Frost protection thermostat.		
Installation data Refrigerant piping size	mm(in)			Liquid line: �6.35 (1/4") Gas line: �12.7 (1/2")	
Connecting method		Flare piping			
Drain hose		Connectable with VP20 (I.D.20 mm, O.D.26 mm)			
Insulation for piping		Necessary (both Liquid & Gas lines)			
Accessories			Mounting kit. Drain hose		
Optional parts			Decorative Panel		

Notes (1) The data are measured at the following conditions.

-					
Iten	n Indoor air t	emperature	Outdoor air	temperature	Standards
Operation	DB	WB	DB	WB	Standards
Cooling	27℃	19°C	35°C	24°C	ISO-T1
Heating	20)°C	7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

Item	Panel Part No.	Wireless kit
FDT40V, 50V, 60V	T-PSA-36W-E	RCN-T-36W-E

Models FDT71V, 100V

Item	Model	FDT71V	FDT100V	
Nominal cooling capacity ⁽¹⁾	kW	7.1	10.0	
Nominal heating capacity ⁽¹⁾	kW	8.0	11.2	
Power source		1 Phase, 220-240	V 50Hz / 220V 60Hz	
Noise level	dB(A)	Hi: 35 Me: 33 Lo: 31	Hi: 40 Me: 37 Lo: 35	
Exterior dimensions Height × Width × Depth	mm	Unit:246 × 840 × 840 Panel:35 × 950 × 950	Unit:298 × 840 × 840 Panel:35 × 950 × 950	
Net weight	kg	29.5 (Unit:24 Panel:5.5)	32.5 (Unit:27 Panel:5.5)	
Refrigerant equipment Heat exchanger		Louver fin & inner grooved tubing		
Refrigerant control		_		
Air handling equipment Fan type & Q'ty		Turbo fan $\times 1$		
Motor	W	50×1	140×1	
Starting method		Direct	line start	
Air flow(Standard)	СММ	Hi: 21 Me: 19 Lo: 17	Hi: 27 Me: 24 Lo: 20	
Outside air intake		Pos	ssible	
Air filter, Q'ty		Pocket plastic n	et \times 1 (Washable)	
Shock & vibration absorber		Rubber sleeve	e (for fan motor)	
Operation control Operation switch			switch (Optional: RC-E3) iti (Optional)	
Room temperature control		Thermostat	by electronics	
Safety equipment			tion for fan motor. ion thermostat.	
Installation data Refrigerant piping size	mm(in)	Liquid line: ϕ 9.52 (3/8")	Gas line: �15.88 (5/8")	
Connecting method		Flare piping		
Drain hose		Connectable with VP20 (I.D.20 mm, O.D.26 mm)		
Insulation for piping		Necessary (both Liquid & Gas lines)		
Accessories		Mounting kit. Drain hose		
Optional parts		Decorat	tive Panel	

Notes (1) The data are measured at the following conditions.

Item	Item Indoor air temperature Outdoor air temperature			Stondordo		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating	20℃		7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

Model	Panel Part No.	Wireless kit
FDT71V, 100V	T-PSA-36W-E	RCN-T-36W-E

Model FDT125V

ltem	Model	FDT125V
Nominal cooling capacity ⁽¹⁾	kW	12.5
Nominal heating capacity ⁽¹⁾	kW	14.0
Power source		1 Phase, 220-240V 50Hz / 220V 60Hz
Noise level	dB(A)	Hi: 42 Me: 40 Lo: 37
Exterior dimensions Height × Width × Depth	mm	Unit:298 × 840 × 840 Panel:35 × 950 × 950
Net weight	kg	32.5 (Unit:27 Panel:5.5)
Refrigerant equipment Heat exchanger		Louver fin & inner grooved tubing
Refrigerant control		_
Air handling equipment Fan type & Q'ty		Turbo fan ×1
Motor	w	140×1
Starting method		Direct line start
Air flow(Standard)	СММ	Hi: 30 Me: 27 Lo: 23
Outside air intake		Possible
Air filter, Q'ty		Pocket plastic net $\times 1$ (Washable)
Shock & vibration absorber		Rubber sleeve (for fan motor)
Operation control Operation switch		Wired remote control switch (Optional: RC-E3) Wireless kit (Optional)
Room temperature control		Thermostat by electronics
Safety equipment		Overload protection for fan motor. Frost protection thermostat.
Installation data Refrigerant piping size	mm(in)	Liquid line: ϕ 9.52 (3/8") Gas line: ϕ 15.88 (5/8")
Connecting method		Flare piping
Drain hose		Connectable with VP20 (I.D.20 mm, O.D.26 mm)
Insulation for piping		Necessary (both Liquid & Gas line)
Accessories		Mounting kit. Drain hose
Optional parts		Decorative Panel

Notes (1) The data are measured at the following conditions.

Item	m Indoor air temperature Outdoor air temperature			Ston donda		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating	20°C		7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

Model	Panel Part No.	Wireless kit
FDT125V	T-PSA-36W-E	RCN-T-36W-E

(c) Ceiling suspended type (FDEN)

Models FDEN40V, 50V, 60V

Item	Model	FDEN40V	FDEN50V	FDEN60V	
Nominal cooling capacity ⁽¹⁾	kW	4.0	5.0	5.6	
Nominal heating capacity ⁽¹⁾	kW	4.5	5.4	6.7	
Power source		1	Phase, 220-240V 50Hz / 220V 60	Hz	
Noise level	dB(A)	Hi: 39 Me	: 38 Lo: 37	Hi: 41 Me : 39 Lo: 38	
Exterior dimensions Height × Width × Depth	mm	210 × 10	70 × 690	210 × 1320 × 690	
Net weight	kg	3	0	36	
Refrigerant equipment Heat exchanger			Louver fin & inner grooved tubing		
Refrigerant control			—		
Air handling equipment Fan type & Q'ty		Centrifug	al fan $\times 2$	Centrifugal fan × 4	
Motor	w	25	×1	20×2	
Starting method			Direct line start		
Air flow(Standard)	СММ	Hi: 11 Me	e : 9 Lo: 7	Hi: 18 Me : 14 Lo: 12	
Outside air intake			Not possible		
Air filter, Q'ty			Pocket plastic net \times 2 (Washable)		
Shock & vibration absorber			Rubber sleeve (for fan motor)		
Operation control Operation switch		Wireles Wire	s remote control switch (Optional: R0 d remote control switch (Optional: R0	CN-E1R) C-E3)	
Room temperature control			Thermostat by electronics		
Safety equipment		Internal thermostat for fan motor. Frost protection thermostat.			
Installation data Refrigerant piping size	mm(in)	Liquid line: ∲6.35 (1/4") Gas line: ∲12.7 (1/2")			
Connecting method		Flare piping			
Drain hose		Connectable with VP20 (I.D.20 mm, O.D.26 mm)			
Insulation for piping		Necessary (both Liquid & Gas line)			
Accessories		Mounting kit. Drain hose			
Optional parts					

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	Ston dondo		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating	20°C		7℃	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

Models FDEN71V, 100V

Item	Model	FDEN71V	FDEN100V	
Nominal cooling capacity ⁽¹⁾	kW	7.1	10.0	
Nominal heating capacity ⁽¹⁾	kW	8.0	11.2	
Power source		1 Phase, 220-240V 50Hz / 220V 60Hz		
Noise level	dB(A)	Hi: 41 Me: 39 Lo: 38	Hi: 44 Me: 41 Lo: 39	
Exterior dimensions Height × Width × Depth	mm	210 × 1320 × 690	250 × 1620 × 690	
Net weight	kg	36	46	
Refrigerant equipment Heat exchanger		Louver fin & in	nner grooved tubing	
Refrigerant control			—	
Air handling equipment Fan type & Q'ty		Centrifugal fan × 4		
Motor	W	20×2	30×2	
Starting method		Direc	et line start	
Air flow (Standard)	СММ	Hi: 18 Me: 14 Lo: 12	Hi: 26 Me: 23 Lo: 21	
Outside air intake		Not	possible	
Air filter, Q'ty		Pocket plastic	net \times 2 (Washable)	
Shock & vibration absorber		Rubber sleev	ve (for fan motor)	
Operation control Operation switch			switch (Optional: RCN-E1R) switch (Optioanl: RC-E3)	
Room temperature control		Thermostal	t by electronics	
Safety equipment			ostat for fan motor. ction thermostat	
Installation data Refrigerant piping size	mm(in)	Liquid line:		
Connecting method		Flare piping		
Drain hose		Connectable with VP20 (I.D.20 mm, O.D.26 mm)		
Insulation for piping		Necessary (both Liquid & Gas lines)		
Accessories		Mounting kit. Drain hose		
Optional parts		_		

Notes (1) The data are measured at the following conditions.

Item	Indoor air t	emperature	Outdoor air	temperature	Stondorda	
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating	20°C		7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

Model FDEN125V

Item	Model	FDEN125V	
Nominal cooling capacity ⁽¹⁾	kW	12.5	
Nominal heating capacity ⁽¹⁾	kW	14.0	
Power source		1 Phase, 220-240V 50Hz / 220V 60Hz	
Noise level	dB(A)	Hi: 46 Me: 44 Lo: 43	
Exterior dimensions Height × Width × Depth	mm	250 × 1620 × 690	
Net weight	kg	46	
Refrigerant equipment Heat exchanger		Louver fin & inner grooved tubing	
Refrigerant control		_	
Air handling equipment Fan type & Q'ty		Centrifugal fan×4	
Motor	W	40×2	
Starting method		Direct line start	
Air flow(Standard)	СММ	Hi: 29 Me: 26 Lo: 23	
Outside air intake		Not possible	
Air filter, Q'ty		Pocket plastic net \times 2 (Washable)	
Shock & vibration absorber		Rubber sleeve (for fan motor)	
Operation control Operation switch		Wireless remote control switch (Optional: RCN-E1R) Wired remote control switch (Optioanl: RC-E3)	
Room temperature control		Thermostat by electronics	
Safety equipment		Internal thermostat for fan motor. Frost protection thermostat.	
Installation data Refrigerant piping size	mm(in)	Liquid line:�9.52 (3/8") Gas line: �15.88 (5/8")	
Connecting method		Flare piping	
Drain hose		Connectable with VP20 (I.D.20 mm, O.D.26 mm)	
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		Mounting kit. Drain hose	
Optional parts		_	

Notes (1) The data are measured at the following conditions.

Item	Indoor air te	emperature	Outdoor air	temperature		
Operation	DB	WB	DB	WB	Standards	
Cooling	27°C	19°C	35°C	24°C	ISO-T1	
Heating	20°C		7°C	6°C	150-11	

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(d) Duct connected-Middle static pressure-type (FDUM)

Models FDUM50V, 60, 71V

Item	Models	FDUM50V	FDUM60V	FDUM71V
Nominal cooling capacity*1	kW	5.0	5.6	7.1
Nominal heating capacity*2	kW	5.4	6.7	8.0
Power source		1	Phase 220-240V 50Hz/220V 60H	Z
Noise level	dB(A)	Hi: 34 Me	: 31 Lo: 28	Hi: 35 Me: 32 Lo: 29
Exterior dimensions Height × Width × Depth	mm	299 × 750 × 635	299 × 9	50 × 635
Net weight	kg	34	4	0
Refrigerant equipment Heat exchanger			Louver fin & inner grooved tubing	
Refrigerant control			-	
Air handling equipment Fan type & Q'ty		Centrifugal fan × 2		
Motor	W	60×1	100×1	100×1
Starting method			Direct line start	
Air flow(Standard)	СММ	Hi: 14 Me: 12 Lo: 11	Hi: 18 Me: 16 Lo: 14	Hi: 20 Me: 18 Lo: 15
Available static pressure (at Hi)	Ра	Standard:50/40, Max:85/90 Standard:50/40, Hi Max:85/100		
Outside air intake			Possible	
Air filter, Q'ty			Installed on site	
Shock & vibration absorber			Rubber sleeve(for fan motor)	
Insulation (noise & heat)			Polyurethane foam	
Operation control Operation switch		Wired ı	remote control switch (Optional: Wireless kit (Optional)	RC-E3)
Room temperature control			Thermostat by electronics	
Safety equipment			Internal thermostat for fan motor. Frost protection thermostat	
Installation data Refrigerant piping size	mm(in)			Liquid line: \$9.52(3/8") Gas line:\$15.88(5/8")
Connecting method		Flare piping		
Drain hose		Connectable with VP20 (I.D.20mm, O.D.26mm)		
Insulation for piping		Necessary (both Liquid & Gas lines)		
Accessories		Drain hose		
Optional parts		Filter kit		

Notes (1) The data are measured at the following conditions.

Item	Indoor air temperature		Outdoor air temperature		Standards
Operation	DB WB		DB	WB	Standards
Cooling*1	27°C	19°C	35°C	24 °C	ISO-T1
Heating*2	20°C		7°C	6°C	150-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

• Filter kit (Optional)

Model	Filter kit No.
FDUM50V	UM-FL1E
FDUM60V, 71V	UM-FL2E

• Wireless kit (Optional)

Model	Wireless kit			
FDUM50V~71V	RCN-KIT3-E			

Models FDUM100V, 125V

Item	Models	FDUM100V	FDUM125V
Nominal cooling capacity*1	kW	10.0	12.5
Nominal heating capacity*2	kW	11.2	14.0
Power source		1 Phase 220-240V 50Hz/220V 60Hz	
Noise level	dB(A)	Hi: 37 Me: 35 Lo: 32	Hi: 38 Me: 36 Lo: 33
Exterior dimensions Height × Width × Depth	mm	350 × 13	70 × 635
Net weight	kg	5	9
Refrigerant equipment Heat exchanger		Louver fin & inne	er grooved tubing
Refrigerant control		-	-
Air handling equipment Fan type & Q'ty		Centrifugal fan × 3	
Motor	w	50 × 1, 100 × 1	50 × 1, 100 × 1
Starting method		Direct li	ne start
Air flow(Standard)	СММ	Hi: 28 Me: 25 Lo: 22 Hi: 34 Me: 31 Lo: 27	
Available static pressure (at Hi)	Ра	Standard:60/60, Max:90/100	Standard:60/55, Max:85/100
Outside air intake		Possible	
Air filter, Q'ty		Installed on site	
Shock & vibration absorber		Rubber sleeve(for fan motor)	
Insulation (noise & heat)		Polyureth	ane foam
Operation control Operation switch		Wired remote control sv Wireless kit	
Room temperature control		Thermostat b	y electronics
Safety equipment		Internal thermostat for fan motor. Frost protection thermostat	
Installation data Refrigerant piping size	mm(in)	Liquid line:∲9.52(3/8"),Gas line:∲15.88(5/8")	
Connecting method		Flare p	piping
Drain hose		Connectable with VP20	(I.D.20mm, O.D.26mm)
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		Drain hose	
Optional parts		Filter kit	

Notes (1) The data are measured at the following conditions.

Item	Indoor air temperature		Outdoor air temperature		Standards
Operation	DB	WB	DB	WB	Standards
Cooling*1	27°C	19°C	35°C	24 °C	ISO-T1
Heating*2	20°C		7°C	6°C	130-11

(2) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

• Filter kit (Optional)

Model

• Wireless kit (Optional)

I to	
Model Item Filter kit No. Mo	del Item Wireless kit
FDUM100V, 125V UM-FL3E F	DUM100V, 125V RCN-KIT3-E

(2) Outdoor unit Model FDC71VN

Item	Model	FDC71VN	
Power source		1 Phase, 220-240V 50Hz / 220V 60Hz	
Nominal cooling capacity ⁽¹⁾	kW	7.1 [3.2~8.0]	
Nominal heating capacity ⁽¹⁾	kW	8.0 [3.6~9.0]	
Noise level	dB(A)	48	
Exterior dimensions Height × Width × Depth	mm	750 × 968 × 340	
Net weight	kg	60	
Refrigerant equipment compressor type & Q' ty		$2YC45DXD \times 1$	
Starting method		Direct line start	
Crankcase heater	W	20	
Heat exchanger		Straight fin & inner grooved tubing	
Refrigerant control		Electronic expansion valve	
Refrigerant		R410A	
Quantity	kg	2.95 (Pre-charged up to the piping length of 30m)	
Refrigerant oil	l	0.65 (FVC50K)	
Defrost control		Microcomputer controlled de-icer	
Air handling equipment Fan type & Q'ty		Propeller fan × 1	
Motor	W	86 × 1	
Starting method		Direct line start	
Air flow(Standard)	СММ	Cooling: 60, Heating: 50	
Shock & vibration absorber		Rubber sleeve (for compressor)	
Safety equipment		Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Installation data Refrigerant piping size	mm(in)	Liquid line: \$\\$9.52 (3/8") Gas line: \$\\$15.88 (5/8")	
Connecting method		Flare piping	
Drain		Hole size $\phi 20 \times 3pcs$.	
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		_	

Notes (1) The cooling and heating capabilities imply the values when the indoor unit of rated capacity is connected under the condition specified in ISO-T1.

(2) The refrigerant quantity in the connecting pipe is not included. Charge it additionally at the site.

(3) Values in [\sim \sim] show the minimum and maximum capacities.

Model FDC100VN

Item		FDC100VN	
Power source		1 Phase, 220-240V 50Hz/220V 60Hz	
Nominal cooling capacity ⁽¹⁾	kW	10.0 [4.0~11.2]	
Nominal heating capacity ⁽¹⁾	kW	11.2 [4.0~12.5]	
Noise level	dB(A)	49	
Exterior dimensions Height × Width × Depth	mm	845 × 970 × 370	
Net weight	kg	74	
Refrigerant equipment compressor type & Q' ty		RMT5126MDE2 × 1	
Starting method		Direct line start	
Crankcase heater	W	20	
Heat exchanger		Straight fin & inner grooved tubing	
Refrigerant control		Electronic expansion valve	
Refrigerant		R410A	
Quantity	kg	3.8 (Pre-charged up to the piping length of 30m)	
Refrigerant oil	l	0.9 (M-MA68)	
Defrost control		Microcomputer controlled de-icer	
Air handling equipment Fan type & Q'ty		Propeller fan $\times 1$	
Motor	w	86×1	
Starting method		Direct line start	
Air flow(Standard)	СММ	Cooling: 75, Heating: 73	
Shock & vibration absorber		Rubber sleeve (for compressor)	
Safety equipment		Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Installation data Refrigerant piping size	mm(in)	Liquid line: ϕ 9.52 (3/8") Gas line: ϕ 15.88 (5/8")	
Connecting method		Flare piping	
Drain		Hole size $\phi 20 \times 3$ pcs.	
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		Edging	

Notes (1) The cooling and heating capabilities imply the values when the indoor unit of rated capacity is connected under the condition specified in ISO-T1.

(2) The refrigerant quantity in the connecting pipe is not included. Charge it additionally at the site.

(3) Values in [\sim \sim] show the minimum and maximum capacities.

Model FDC100VS

Item	Model	FDC100VS	
Power source		3 Phase, 380-415V 50Hz/380V 60Hz	
Nominal cooling capacity ⁽¹⁾	kW	10.0 [4.0~11.2]	
Nominal heating capacity ⁽¹⁾	kW	11.2 [4.0~12.5]	
Noise level	dB(A)	49	
Exterior dimensions Height × Width × Depth	mm	845 × 970 × 370	
Net weight	kg	74	
Refrigerant equipment compressor type & Q' ty		RMT5126MDE3 × 1	
Starting method		Direct line start	
Crankcase heater	W	20	
Heat exchanger		Straight fin & inner grooved tubing	
Refrigerant control		Electronic expansion valve	
Refrigerant		R410A	
Quantity	kg	3.8 (Pre-charged up to the piping length of 30m)	
Refrigerant oil	l	0.9 (M-MA68)	
Defrost control		Microcomputer controlled de-icer	
Air handling equipment Fan type & Q'ty		Propeller fan $\times 1$	
Motor	w	86×1	
Starting method		Direct line start	
Air flow(Standard)	СММ	Cooling: 75, Heating: 73	
Shock & vibration absorber		Rubber sleeve (for compressor)	
Safety equipment		Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Installation data Refrigerant piping size	mm(in)	Liquid line:09.52 (3/8") Gas line: 015.88 (5/8")	
Connecting method		Flare piping	
Drain		Hole size $\phi 20 \times 3$ pcs.	
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		Edging	

Notes (1) The cooling and heating capabilities imply the values when the indoor unit of rated capacity is connected under the condition specified in ISO-T1.

(2) The refrigerant quantity in the connecting pipe is not included. Charge it additionally at the site.

(3) Values in [\sim] show the minimum and maximum capacities.

Models FDC125VN, 140VN

Item	Model	FDC125VN	FDC140VN
Power source		1 Phase, 220-240V 50Hz/220V 60Hz	
Nominal cooling capacity ⁽¹⁾	kW	12.5 [5.0~14.0]	14.0 [5.0~14.5]
Nominal heating capacity ⁽¹⁾	kW	14.0 [4.0~16.0]	16.0 [4.0~16.5]
Noise level	dB(A)	Cooling: 50, Heating: 51	51
Exterior dimensions Height × Width × Depth	mm	845 ×	970 × 370
Net weight	kg		74
Refrigerant equipment compressor type & Q' ty		RMT5	126MDE2 × 1
Starting method		Dire	ect line start
Crankcase heater	W		20
Heat exchanger		Straight fin &	inner grooved tubing
Refrigerant control		Electronic expansion valve	
Refrigerant		R410A	
Quantity	kg	3.8 (Pre-charged up to the piping length of 30m)	
Refrigerant oil	l	0.9 (M-MA68)	
Defrost control		Microcomputer controlled de-icer	
Air handling equipment Fan type & Q'ty		Propeller fan $\times 1$	
Motor	w		86 × 1
Starting method		Dire	ect line start
Air flow(Standard)	СММ	Cooling:	75, Heating: 73
Shock & vibration absorber		Rubber slee	ve (for compressor)
Safety equipment		Internal thermostat for fan motor. Anomalous discharge temperature protection.	
Installation data Refrigerant piping size	mm(in)	Liquid line: \$\\$ 9.52 (3/8") Gas line: \$\\$15.88 (5/8")	
Connecting method		Flare piping	
Drain		Hole si	ze $\phi 20 \times 3$ pcs.
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		Edging	

Notes (1) The cooling and heating capabilities imply the values when the indoor unit of rated capacity is connected under the condition specified in ISO-T1.

(2) The refrigerant quantity in the connecting pipe is not included. Charge it additionally at the site.

(3) Values in [\sim] show the minimum and maximum capacities.

Models FDC125VS, 140VS

Item	Model	FDC125VS	FDC140VS
Power source		3 Phase. 380-4	15V 50Hz/380V 60Hz
Nominal cooling capacity ⁽¹⁾	kW	12.5 [5.0~14.0] 14.0 [5.0~14.5]	
Nominal heating capacity ⁽¹⁾	kW	14.0 [4.0~16.0]	16.0 [4.0~16.5]
Noise level	dB(A)	Cooling: 50, Heating: 51	51
Exterior dimensions Height × Width × Depth	mm	845 ×	970 × 370
Net weight	kg		74
Refrigerant equipment compressor type & Q' ty		RMT5	126MDE2 × 1
Starting method		Dire	ect line start
Crankcase heater	W		20
Heat exchanger		Straight fin &	inner grooved tubing
Refrigerant control		Electronic expansion valve	
Refrigerant		R410A	
Quantity	kg	3.8 (Pre-charged up to the piping length of 30m)	
Refrigerant oil	l	0.9 (M-MA68)	
Defrost control		Microcomputer controlled de-icer	
Air handling equipment Fan type & Q'ty		Propeller fan $\times 1$	
Motor	w	86×1	
Starting method		Dire	ect line start
Air flow(Standard)	СММ	Cooling:	75, Heating: 73
Shock & vibration absorber		Rubber slee	ve (for compressor)
Safety equipment			nostat for fan motor. rge temperature protection.
Installation data Refrigerant piping size	mm(in)	Liquid line:∲9.52 (3/8") Gas line: ∲15.88 (5/8")	
Connecting method		Flare piping	
Drain		Hole siz	$ze \varphi 20 \times 3pcs.$
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		Edging	

Notes (1) The cooling and heating capabilities imply the values when the indoor unit of rated capacity is connected under the condition specified in ISO-T1.

(2) The refrigerant quantity in the connecting pipe is not included. Charge it additionally at the site.

(3) Values in [\sim] show the minimum and maximum capacities.

Models FDC200VS, 250VS

Item	Model	FDC200VS	FDC250VS
Power source		3 Phase, 380-415V 50Hz/380V 60Hz	
Nominal cooling capacity ⁽¹⁾	kW	20.0 [7.0~22.4] 25.0 [10.6~28.0]	
Nominal heating capacity ⁽¹⁾	kW	22.4 [7.6~25.0]	28.0 [9.5~31.5]
Noise level	dB(A)	57	Cooling: 57, Heating: 58
Exterior dimensions Height × Width × Depth	mm	1300 × 970 × 370	1505 × 970 × 370
Net weight	kg	122	140
Refrigerant equipment compressor type & Q' ty		GTC5150N	$ND70K \times 1$
Starting method		Direct 1	ine start
Crankcase heater	W	3	3
Heat exchanger		Straight fin & inn	er grooved tubing
Refrigerant control		Electronic ex	pansion valve
Refrigerant		R410A	
Quantity	kg	5.4 (Pre-charged up to the piping length of 30m)	7.2 (Pre-charged up to the piping length of 30m)
Refrigerant oil	l	1.45 (M-MA32R)	
Defrost control		Microcomputer controlled de-icer	
Air handling equipment Fan type & Q'ty		Propelle	$r fan \times 2$
Motor	w	86	× 2
Starting method		Direct 1	ine start
Air flow(Standard)	СММ	Cooling: 150	Heating: 145
Shock & vibration absorber		Rubber sleeve (for compressor)
Safety equipment			tat for fan motor. temperature protection.
Installation data Refrigerant piping size	mm(in)	Liquid line:∲9.52 (3/8") Gas line:∲22.22 (7/8")	Liquid line:�12.7 (1/2") Gas line:�22.22 (7/8")
Connecting method		Liquid line: Flare piping, Gas line: Brazing	
Drain		Hole size $\phi 20 \times 3$ pcs.	
Insulation for piping		Necessary (both Liquid & Gas lines)	
Accessories		Reducer kit (Please see 1.5.3), Accessory pipe (Please see 1.5.3)	

Notes (1) The cooling and heating capabilities imply the values when the indoor unit of rated capacity is connected under the condition specified in ISO-T1. (2) The refrigerant quantity in the connecting pipe is not included. Charge it additionally at the site.

(3) Values in [$~~\sim~~$] show the minimum and maximum capacities.

(3) Operation chart

The Multi-Type V series is a system that allows for different models and capacities of indoor units to be connected so the individual operating characteristics of the indoor and outdoor are provided. Use the procedure shown in Item (c) to calculate the combined operating characteristics.

(a) Operating characteristic of outdoor unit

operating characteristic of c			(220-240	240V 50Hz/220V 60Hz)	
Item	Model	FDC71VN	FDC100VN	FDC125VN	FDC140VN
Cooling power consumption	kW	2.02/2.02	2.62/2.62	3.91/3.91	4.51/4.51
Heating power consumption	K VV	2.16/2.16	2.60/2.60	3.63/3.63	4.40/4.40
Cooling running current		10.4/10.4	11.7/12.3	17.3/18.2	20.4/21.4
Heating running current	A	11.1/11.1	11.6/12.2	16.2/16.9	19.5/20.4
Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <17>		5 <24>	

(380-415V 50Hz/380V 60Hz)

Item	Model	FDC100VS	FDC125VS	FDC140VS
Cooling power consumption	kW	2.62/2.62	3.91/3.91	4.51/4.51
Heating power consumption	K VV	2.60/2.60	3.63/3.63	4.40/4.40
Cooling running current		3.8/4.0	5.5/5.9	6.5/6.9
Heating running current	А	3.8/4.0	5.1/5.5	6.3/7.0
Inrush current (L.R.A) <max. current="" running=""></max.>	А		5 <15>	

(380-415V 50Hz/380V 60Hz)

Item	Model	FDC200VS	FDC250VS
Cooling power consumption	1-337	6.34/6.34	8.71/8.71
Heating power consumption	kW	6.20/6.20	7.75/7.75
Cooling running current		9.1/9.1	12.7/12.7
Heating running current	А	9.0/9.0	11.4/11.4
Inrush current (L.R.A) <max. current="" running=""></max.>	А	5 <24>	5 <27>

Note (1) This packaged air-conditioner is manufactured and tested in conformity with the following standard. ISO-T1 "UNITARY AIR-CONDITIONERS"

(b) Operating characteristic of indoor unit

FDTC Series

(220-240V 50Hz/220V 60Hz)

Item	Nodel	FDTC40V	FDTC50V	
Cooling power consumption	kW	0.04-0.04/0.04		
Heating power consumption	KW	0.04-0.04/0.04		
Cooling running current		0.15-0.14/0.15		
Heating running current	A	0.15-0.14/0.15		

FDT Series

(220-240V 50Hz/220V 60Hz)

Item	Model	FDT40V	FDT50V	FDT60V	FDT71V	FDT100V	FDT125V
Cooling power consumption	kW	0.030-0.030/0.030	0.040-0.040/0.040	0.100-0.1	00/0.100	0.136-0.1	36/0.136
Heating power consumption	K VV	0.030-0.030/0.030	0.040-0.040/0.040	0.100-0.100/0.100		0.136-0.1	36/0.136
Cooling running current		0.20-0.18/0.20	0.20-0.18/0.20	0.30-0.	28/0.30	0.45-0.	40/0.45
Heating running current	A	0.20-0.18/0.20	0.20-0.18/0.20	0.30-0.	28/0.30	0.45-0.	40/0.45

FDEN Series

FDEN Series (220-240V 50Hz/220V 60H							
Item	Model	FDEN40V	FDEN50V	FDEN60V	FDEN71V	FDEN100V	FDEN125V
Cooling power consumption	kW	0.05-0.	06/0.06	0.10-0.11/0.11		0.14-0.16/0.16	0.16-0.18/0.20
Heating power consumption	K VV	0.05-0.06/0.06		0.09-0.10/0.10		0.13-0.15/0.15	0.15-0.17/0.18
Cooling running current		0.25-0.2	26/0.29	0.46-0.	48/0.50	0.65-0.67/0.77	0.77-0.78/0.91
Heating running current	A	0.23-0.25/0.28		0.42-0.44/0.46		0.59-0.63/0.70	0.70-0.72/0.83

Notes(1) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(2) The values shown in the above table are common to both cooling and heating operations.

FDUM Series

(220-240V 50Hz/220V 60Hz)

Item		FDUM50V	FDUM60V	FDUM71V	FDUM100V	FDUM125V
Cooling power consumption	kW	0.14-0.16/0.14	0.15-0.17/0.15	0.16-0.19/0.16	0.24-0.28/0.24	0.28-0.32/0.32
Heating power consumption	KW	0.14-0.16/0.14	0.15-0.17/0.15	0.16-0.19/0.16	0.24-0.28/0.24	0.28-0.32/0.32
Cooling running current		0.63-0.67/0.63	0.68-0.71/0.68	0.73-0.79/0.73	1.07-1.17/1.07	1.28-1.32/1.28
Heating running current	A	0.63-0.67/0.63	0.68-0.71/0.68	0.73-0.79/0.73	1.07-1.17/1.07	1.28-1.32/1.28

Notes(1) This packaged air-conditioner is manufactured and tested in conformity with the following standard.

ISO-T1 "UNITARY AIR-CONDITIONERS"

(2) The values shown in the above table are common to both cooling and heating operations.

(c) Calculation of total operation characteristics

Since the operation characteristics of series Multi depend on combination of indoor unit, calculate the total operation characteristics of the system by using the formulas below according to specifications of each indoor unit or outdoor unit.

1) 1 Phase models

a) Total power consumption

Total power consumption (kW) = Power consumption of outdoor unit + \sum (Power consumption of indoor unit)

b) Total running current

Total running current (A) = Running current of outdoor unit + \sum (Running current of indoor unit)

c) Total power factor

Total power factor (%) = [Total power consumption (W) / Total running current (A) × Power source] × 100 Total operation characteristics = Operation characteristic value of outdoor unit + Operation characteristic value of indoor unit [Example]

(Conditions)	Operation Voltage Indoor unit: 220 V, 50 Hz
	Outdoor unit: 220 V, 50 Hz
	Operation mode Cooling and Heating
	UnitOutdoor unit: FDC140VN × 1 unit
	Indoor unit: FDT71V \times 2 units

(Cooling/Heating)

Operation characteristics of each unit

 Model
 FDC140VN
 FDT71V

 Power consumption (kW)
 4.51/4.40
 0.100/0.100

 Running current (A)
 20.4/19.5
 0.30/0.30

① Total power consumption (kW)

(Cooling) $4.51 + (0.100 \times 2) = 4.71$

(Heating) $4.40 + (0.100 \times 2) = 4.60$

② Total running current (A)

(Cooling) $20.4 + (0.30 \times 2) = 21.0$

(Heating) $19.5 + (0.30 \times 2) = 20.1$

③ Total power factor (%)

(Cooling)
$$\frac{4.71 \times 1000}{21.0 \times 220} \times 100 = .99 \%$$

(Heating) $\frac{4.60 \times 1000}{20.1 \times 220} \times 100 = .99 \%$

2) 3 Phase models

a) Total power consumption

Total power consumption (kW) = Power consumption of outdoor unit + \sum (Power consumption of indoor unit)

b) Total running current

Total running current (A) = Running current of outdoor unit + [\sum (Running current of indoor unit) × 1/3]

c) Total power factor

Total power factor (%) = [Total power consumption (W) $/\sqrt{3} \times$ Total running current (A) × Power source] × 100 Total operation characteristics = Operation characteristic value of outdoor unit + Operation characteristic value of indoor unit [Example]

(Conditions)	Operation VoltageIndoor unit: 220 V, 50 Hz
	Outdoor unit: 380 V, 50 Hz
	Operation mode Cooling and Heating
	Unit······Outdoor unit: FDC200VS × 1 unit
	Indoor unit: FDT71V × 1 unit, FDT125V × 1 unit

(Cooling/Heating)

Operation characteristics of each unit

 Model
 FDC200VS
 FDT71V
 FDT125V

 Power consumption (kW)
 6.34/6.20
 0.100/0.100
 0.136/0.136

 Running current (A)
 9.1/9.0
 0.30/0.30
 0.45/0.45

① Total power consumption (kW)

(Cooling) 6.34 + 0.100 + 0.136 =. 6.58 (kW)

(Heating) 6.20 + 0.100 + 0.136 ≒. 6.44 (kW)

⁽²⁾ Total running current (A)

(Cooling) 9.1 +
$$\left[(0.30 + 0.45) \times \frac{1}{3} \right] = .9.6$$
 (A)

(Heating)
$$9.0 + \left[(0.30 + 0.45) \times \frac{1}{3} \right] \doteq 9.5$$
 (A)

③ Total power factor (%)

(Cooling)
$$\frac{6.58 \times 1000}{\sqrt{3} \times 9.6 \times 380} \times 100 = .99 \%$$

(Heating)
$$\frac{6.44 \times 1000}{\sqrt{3} \times 9.5 \times 380} \times 100 = .99 \%$$

2.2.2 Range of usage & limitations


Item	Model	FDC71~140	FDC200, 250			
Indoor return air temperature (Upper, lower limits) Outdoor air temperature (Upper, lower limits)		Please see the next page.				
		i lease see the next page.				
Operating temperatu	ure	When used under -5°C, in	stall a snow hood (option).			
Indoor unit atmosph temperature and hur						
Airflow volume/station	c pressure	Use ducts and blow outlets of better heat insulation within the characteristics of blower. (FDUM)				
Heat insulation of re	frigerant pipes	Heat insulation of 20 mm or more in thickness is necessary in the ceiling, etc, where the relative humidity exceeds 70%.				
Heat insulation of dr	ain pipes	Heat insulation of 10 mm or more in thickness is necessary in the ceiling, etc, where the relative humidity exceeds 70%.				
Refrigerant line (one	e way) length ⁽⁵⁾	Max. 50m	Max. 70m*			
Vertical height differ outdoor unit and ind			oor unit is higher) loor unit is lower)			
Installation site		The outline drawing contains restrictions concerning the installation space. Install the indoor unit 2.5m or above higher than the floor surface.				
Power source voltage Rating ± 10%		± 10%				
Voltage at starting		Min. 85% of rating				
Compressor ON - OFF	Cycle Time	7 minutes or more (from OFF	F to OFF) or (from ON to ON)			
Frequency	Stop Time	3 minutes or more				

Notes (1) Do not install the unit at the following places.

• Places exposed to oil splashes or steam (e.g. kitchens and machine plants).

• Places where inflammable gas may leak.

- Places containing a great amount of sulfide gases (e.g. hot spring area).
- Places directly exposed to sea breeze (e.g. coastal area).
- Places containing acid or alkaline air.
- · Places adjacent to equipment generating electromagnetic waves or high-frequency waves.
- Places sucking the exhaust gas from heat exchanger.
- Do not install the unit on an object moistened with water.
- Places where carbon fiber and metal particles, powder, etc. are floating.
- Places where chimney smoke is hanging.
- Places at an elevation of 1000m and above.
- Places splashed with water (laundry room, etc.).
- The indoor unit is not protected against water penetration.
- Do not install indoor units of twin, triple and double-twin specifications separately in a room with partition.
- Where matters affecting devices, such as sulfuric gas, chlorine gas, acid, alkali, etc, may generate or accumulate.
- Where cosmetics or special sprays are used frequently.
- Installation on mobile thing such as vehicle, ship, etc.
- Where snow falls heavily. (Including where snow melting agent is spreaded)
- Where light beams that affect the receiving device fly arond, in case of the wireless specification.
- (2) If ambient temperature and humidity exceed the above values, please add polyurethane foam insulation to the outer plate (t10 and above).
- (3) Please set the lower limit of one-way piping length to 5m and above.
- (4) When \emptyset 22.22 gas pipe is used for piping lengths with the * mark, let the maximum one-way length be 30m.
- (5) For details of the pipe length specification, refer to next page.

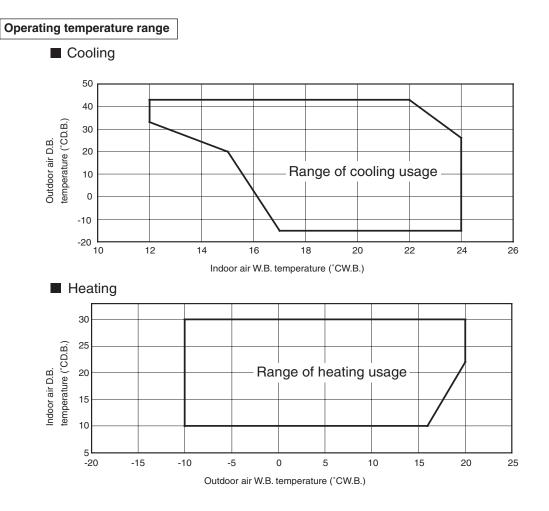

Height and length restrictions for refrigerant piping

Indoor unit

Twin type

Outdoor unit

Models 71~140


One-way pipe length (m) $L + \ell a + \ell b \le 50$ Branch pipe length (m) $I \ell a - \ell bI \le 10, \ \ell a \le 30, \ \ell b \le 30$ Difference in height between indoor units (m) h=0.5 or less

Models 200, 250

 $\begin{array}{ll} \text{One-way pipe length (m)} & L+\ell \ a \ \leq 70, \ L+\ell \ b \ \leq 70 \\ \text{Branch pipe length (m)} & \ \ l \ \ell \ a-\ell \ b \ l \ \leq 10, \ \ell \ a \ \leq 30, \ \ell \ b \ \leq 30 \\ \text{Difference in height between indoor units (m)} & \ h=0.5 \ \text{or less} \end{array}$

Triple type

■ The Indoor_outdoor piping length differences among indoor units are less than 3m. Model 140, 200 only Model 140



One-way pipe length (m) $L + \ell a + \ell b + \ell c \leq 50$ Branch pipe length (m) $I \ell a - \ell b I < 3, I \ell a - \ell c I < 3, I \ell b - \ell c I < 3$ $\ell a \leq 30, \ell b \leq 30, \ell c \leq 30$


 $\label{eq:linear} Difference \ in \ height \ between \ indoor \ units \ (m) \quad h1{=}0.5 \ or \ less, \ h2{=}0.5 \ or \ less, \ h3{=}0.5 \ or \ less$

Model 200

One-way pipe length (m) $L + \ell a \leq 70$, $L + \ell b \leq 70$, $L + \ell c \leq 70$ Branch pipe length (m) $I \ell a - \ell b I < 3$, $I \ell a - \ell c I < 3$, $I \ell b - \ell c I < 3$ $\ell a \leq 30$, $\ell b \leq 30$, $\ell c \leq 30$

Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less, h3=0.5 or less

Model 250 only



Note(1) The unit that requires the longest one-way piping length should be connected to the ℓ a piping line.

Model 250

One-way pipe length (m) L1 + ℓ a ≤ 70 , L1 + L2 + ℓ b ≤ 70 , L1 + L2 + ℓ c ≤ 70 Branch pipe length (m) ℓ a - (L2 + ℓ b) < 3, ℓ a - (L2 + ℓ c) I < 3, I ℓ b - ℓ c I < 3 ℓ a ≤ 30 , L2 + ℓ b ≤ 30 , L2 + ℓ c ≤ 30 , L2 ≤ 5 Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less, h3=0.5 or less

Note(2) In case of model 250, the application that the indoor_outdoor piping length

differences among indoor units are 3m or more is prohibited.

The Indoor_outdoor piping length differences among indoor units are 3m or more.

Models 140, 200 only Outdoor unit Indoor unit

Model 140

Note(1) The unit that requires the longest one-way piping length should be connected to the ℓ a piping line.


 $\begin{array}{ll} \text{One-way pipe length (m)} & \text{L1} + \text{L2} + \ell \ a + \ell \ b + \ell \ c \leq 50 \\ \text{Branch pipe length (m)} & 3 \leq \ell \ a - (\text{L2} + \ell \ b) \leq 10, 3 \leq \ell \ a - (\text{L2} + \ell \ c) \leq 10, \ | \ \ell \ b - \ell \ c \ | \leq 10 \\ \ell \ a \leq 30, \ \text{L2} + \ell \ b \leq 27, \ \text{L2} + \ell \ c \leq 27, \ \text{L2} \leq 5 \\ \text{Difference in height between indoor units (m)} & \text{h1=0.5 or less, h3=0.5 or less} \\ \end{array}$

Model 200

 $\begin{array}{ll} \text{One-way pipe length (m)} & \text{L1} + \ell \ a \leq 70, \, \text{L1} + \text{L2} + \ell \ b \leq 70, \, \text{L1} + \text{L2} + \ell \ c \leq 70 \\ \text{Branch pipe length (m)} & 3 \leq \ell \ a - (\text{L2} + \ell \ b) \leq 10, \, 3 \leq \ell \ a - (\text{L2} + \ell \ c) \leq 10, \, \text{I} \ \ell \ b - \ell \ c \ \text{I} \leq 10 \\ \ell \ a \leq 30, \, \text{L2} + \ell \ b \leq 27, \, \text{L2} + \ell \ c \leq 27, \, \text{L2} \leq 5 \end{array}$

Difference in height between indoor units (m) h1=0.5 or less, h2=0.5 or less, h3=0.5 or less

Double-twin type



Models 200, 250

, $L + \ell \ 1 + \ell \ B \le 70$, $L + \ell \ 2 + \ell \ C \le 70$,
$C - \ell D \leq 10$
$(\ell + \ell C) \leq 10, (\ell + \ell A) - (\ell + \ell D) \leq 10$
+ ℓ C) ≤ 10, (ℓ 1 + ℓ B) – (ℓ 2 + ℓ D) ≤ 10
$1 + \ell B \le 30, \ \ell 2 + \ell C \le 30, \ \ell 2 + \ell D \le 30$
$C + \ell D \leq 15$
h1=0.5 or less, h2=0.5 or less
h3=0.5 or less, h4=0.5 or less
h5=0.5 or less, h6=0.5 or less

In the illustration the L is main piping and ℓ 1, ℓ 2, ℓ A, ℓ B, ℓ C and ℓ D are branch piping.

Request

When 40-60 models of indoor units are applied to V-multi usage, be sure to use the liquid piping size ø9.52mm for the piping between branch and indoor unit. (for double-twin type only)
 For the connections to the indoor units, be sure to reduce the liquid piping size to ø6.35mm just before the indoor unit by using reducer included in the branch piping kit as optional part.

(2) Regarding the branching, be sure to use the specified branch piping kit as optional part and install it to have a level or perpendicular position according to the description of instruction manual attached to the branch piping kit.

2.2.3 Exterior dimensions

Details are the same as in chapter 1.2.3 see page 90.

2.2.4 Exterior appearance

Details are the same as in chapter 1.2.4 see page 109.

2.2.5 Piping system

Details are the same as in chapter 1.2.5 see page 111.

2.2.6 Selection chart

Details are the same as in chapter 1.2.6 see page 118.

2.2.7 Characteristics of fan

Details are the same as in chapter 1.2.7 see page 130.

2.2.8 Noise level

Details are the same as in chapter 1.2.8 see page 136.

2.3 ELECTRICAL WIRING

Details are the same as in chapter 1.3 see page 140.

2.4 OUTLINE OF OPERATION CONTROL BY MICROCOMPUTER

Details are the same as in chapter 1.4 see page 151.

2.5 APPLICATION DATE

Except below mentioned items, see chapter 1.5 in page 178.


(1) Refrigerant piping work

Select the piping to match the specification of indoor unit and installation.

(a) Decision of piping specification

(i) Twin type


Models FDC71~140 [Branch pipe set : DIS-WA1]



(Example)

Item	Indoor unit	Liqui	Liquid pipe		pipe
Model	combinations	Main pipe	Branch pipe	Main pipe	Branch pipe
FDC71	40 + 40	∮9.52×t 0.8	∮9.52×t 0.8	∮15.88×t 1.0	ф12.7 × t 0.8
FDC100	50 + 50				
FDC125	60 + 60				A 15 00 1 0
FDC140	71 + 71				¢15.88×t1.0

Chart of shapes of branch piping parts (DIS-WA1)



Notes (1) Symbol ① to ④ in the drawing shows the symbols of branch piping parts in the chart respectivelys.

(2) Branch piping should always be arranged to have level or perpendicular position.

(See the next page.)

(2) The reducer (4) is for FDC71 and 100 models only

Notes (1) When 40-60 models of indoor units are applied to this combination, the reducer ③ supplied with the branch piping set should be used in order to reduce the liquid piping size from ϕ 9.52mm to ϕ 6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size ϕ 9.52mm from branch to indoor unit.

Models FDC200, 250 [Branch pipe set : DIS-WB1]




Chart of shapes of branch piping parts (DIS-WB1)								
Gas pipe	Symbol	Liquid pipe	Symbol	Reducer	Symbol			
1025.4 19 39 1015.88	1		2	OD12.7	3			

(Example)

Item	Indoor unit combinations	Liqui	d pipe	Gas	pipe
Model		Main pipe	Branch pipe	Main pipe	Branch pipe
FDC200	100 + 100	\$ 9.52 × t 0.8	\$ 9.52 × t 0.8	¢ 22.22 × t 1.6	φ15.88 × ±1.0
FDC250	125 + 125	\$ 12.7 × t 0.8	Φ 9.52 × t 0.8	¥ 22.22 × t 1.0	φ 15.00 × t 1.0


Notes (1) Symbol ① to ③ in the drawing shows the symbols of branch piping parts in the chart respectivelys.

(2) Branch piping should always be arranged to have level or perpendicular position. (See the below figure.)

Notes (1) For model FDC200, when the length of the main piping "L" exceeds 30m, $\phi 12.7mm$ liquid pipe should be used. If $\phi 9.52mm$ liquid pipe is used instead of $\phi 12.7mm$, it may cause performance degradation and/or leakage of condensate from indoor unit.

(2) Minimum one-way piping length should be 3m. If the piping length is less than 3m, the precharged amount of refrigerant should be reduced at site by recovering refrigerant and recharging proper amount according to the instruction of our distributor.

• The branch piping (both gas and liquid lines) should always be arranged to have a level or perpendicular position.

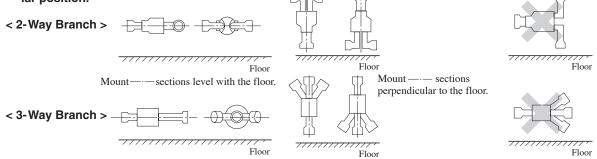

(ii) Triple type

■ The indoor_outdoor piping length differences among indoor units are less than 3m. Model FDC140 [Branch pipe set : DIS-TA1]





Chart of shapes of branch piping parts (DIS-TA1)




Notes (1) Symbol ① to ③ in the drawing shows the symbols of branch piping parts in the chart respectively.

 Branch piping should always be arranged to have level or perpendicular position. (See the above figure.)

Item	Indoor unit combinations			Gas pipe		
Model		Main pipe	Branch pipe	Main pipe	Branch pipe	
FDC140	50 + 50 + 50	\$ 9.52 × t 0.8	\$ 9.52 × t 0.8	\$ 15.88 × t 1.0	\$ 12.7 × t 0.8	


Notes (1) The reducer (3) supplied with the branch piping set should be used in order to reduce the liquid piping size from ϕ 9.52mm to ϕ 6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size ϕ 9.52mm from branch to indoor unit.


Model FDC200 [Branch pipe set : DIS-TB1]



Item	Indoor unit combinations	Liqui	d pipe	Gas	pipe
Model		Main pipe	Branch pipe	Main pipe	Branch pipe
FDC200	71 + 71 + 71	\$ 9.52 × t 0.8	\$ 9.52 × t 0.8	\$ 22.22 × 1.6	\$ 15.88 × t 0.8

Chart of shapes of branch piping parts (DIS-TB1)





Gas pipe

Gas pipe

Notes (1) Symbol (1) to (2) in the drawing shows the symbols of branch piping parts in the chart respectively.

(2) Branch piping should always be arranged to have level or perpendicular position. (Refer to the 348 page for details)

Notes (1) For model FDC200, when the length of the main piping "L" exceeds 30m, ϕ 12.7mm liquid pipe should be used. If ϕ 9.52mm liquid pipe is used instead of ϕ 12.7mm, it may cause performance degradation and/or leakage of condensate from indoor unit.

Model FDC250 [Branch pipe set : DIS-WA1×1set, DIS-WB1×1set]

Chart of shapes of branch piping parts (DIS-WB1)

Liquid pipe

Symbo

2

Reducer

Reducer

► 10


Svm

3

Symb

6

7

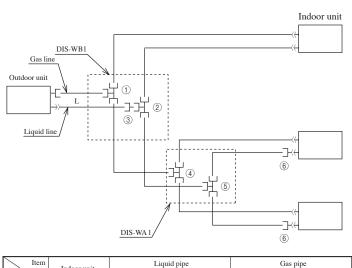

Branch pipe

9.52×t 0.8

ID15.88	Ø	ID9.52	(5)	ID9.52 8 46.35 flared nu 2 piece
				OD15.88

Liquid pipe

Chart of shapes of branch piping parts (DIS-WA1)

Notes (1) Symbol (1) to (7) in the drawing shows the symbols of branch piping parts in the chart respectively.

(2) Branch piping should always be arranged to have level or perpendicular position. (Refer to the 348 page for details.)

Notes (1) The reducer (6) supplied with the branch piping set should be used in order to reduce the liquid piping size from ϕ 9.52mm to ϕ 6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size $\phi 9.52 \text{mm}$ from branch to indoor unit.

Branch pipe

15.88×t1.0

Main pipe

22.22 × t 1.0

(2) The reducer (6) is for indoor unit model 60 only

Main pipe

12.7 × t 0.8

Indoor unit

combinations

60 + 60 + 125

71 + 71 + 100

Model

FDC250

■ The indoor_outdoor piping length differences among indoor units are 3m or more. (In case of model 250, the application that the indoor_outdoor piping length differences among indoor units are 3m or more is prohibited.)

Model FDC140 [Branch pipe set : DIS-WA1 × 2set]





Chart of shapes of branch piping parts (DIS-WA1)




Notes (1) Symbol (1) to (4) in the drawing shows the symbols of branch piping parts in the chart respectively.

(2) Branch piping should always be arranged to have level or perpendicular position. (Refer to the 348 page for details)

Note (1) When 50 model of indoor unit is applied to this combination, the reducer ③ supplied with the branch piping set should be used in order to reduce the liquid piping size from $\phi 9.52$ mm to $\phi 6.35$ mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size $\phi 9.52$ mm from branch to indoor unit.

Model FDC200 [Branch pipe set : DIS-WB1 × 1set, DIS-WA1 × 1set] Chart of shapes of branch piping parts (DIS-WB1)



Item	Indoor unit combinations	Liqui	d pipe	Gas	pipe
Model		Main pipe	Branch pipe	Main pipe	Branch pipe
FDC200	71 + 71 + 71	\$ 9.52 × t 0.8	\$ 9.52 × t 0.8	\$22.22 × 1.6	\$ 15.88 × t 0.8





Chart of shapes of branch piping parts (DIS-WA1)



Notes (1) Symbol (1) to (7) in the drawing shows the symbols of


branch piping parts in the chart respectively. (2) Branch piping should always be arranged to have level

or perpendicular position. (Refer to the 348 page for details.)

Note (1) For model FDC200, when the length of the main piping "L" exceeds 30m, ϕ 12.7mm liquid pipe should be used. If ϕ 9.52mm liquid pipe is used instead of ϕ 12.7mm, it may cause performance degradation and/or leakage of condensate from indoor unit.

(iii) Double twin type

Models FDC200, 250 [Branch pipe set : DIS-WA1 × 2set, DIS-WB1 × 1set]

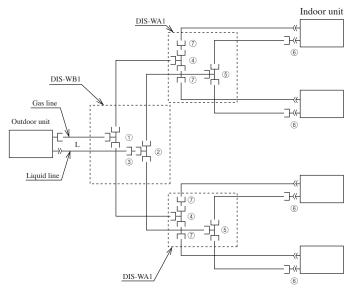


Item	Indoor unit	Liquid pipe			Gas pipe		
Model combinations	Main pipe	1st branch pipe	2nd branch pipe	Main pipe	1st branch pipe	2nd branch pipe	
FDC200	50 + 50 + 50 + 50	ϕ 9.52 × t 0.8	• \$ 9.52 × t 0.8	\$ 9.52 × t 0.8	\$ 22.22 × t 1.6	♦ 15.88 × t 1.0	\$ 12.7 × t 0.8
FDC250	60 + 60 + 60 + 60	\$ 12.7 × t 0.8					\$ 15.88 × t 1.0

Notes (1) The reducer (e) supplied with the branch piping set should be used in order to reduce the liquid piping size from φ9.52mm to φ6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size φ9.52mm from branch to indoor unit.
 (2) The reducer (T) is for FDC200 model only

Chart of shapes of branch piping parts (DIS-WB1)

Chart of shapes of branch piping parts (DIS-WA1)



Notes (1) Symbol ① to ⑦ in the drawing shows the symbols of branch piping parts in the chart respectively.
(2) Branch piping should always be arranged to have level or perpendicular position. (Refer to the 348 page for details.)
(3) The reducer ③ is for FDC200 model only

Notes (1) For model FDC200, when the length of the main piping "L" exceeds 30m, ϕ 12.7mm liquid pipe should be used. If ϕ 9.52mm liquid pipe is used instead of ϕ 12.7mm, it may cause performance degradation and/or leakage of condensate from indoor unit.


(2) Minimum one-way piping length should be 3m. If the piping length is less than 3m, the precharged amount of refrigerant should be reduced at site by recovering refrigerant and recharging proper amount according to the instruction of our distributor.

(b) How to use pipe reducer (Attached to FDC200, 250 only)

• \$\phi22.22 (OD) size of the refrigerant gas pipe can be used by using the accessory pipe B, although \$\phi25.4 (OD) size of the refrigerant gas pipe is standard.

(When ϕ 25.4 (OD) size of the refrigerant gas pipe is used, the accessory pipe B is unnecssary.) (*) OD: Outer diameter.

Install this accessory pipe according to the following.




2.6 MAINTENANCE DATE

Details are the same as in chapter 1.6 see page 245.

3. WIRELES KIT (OPTIONAL PARTS)

3.1	FDT SERIES (RCN-T-36W-E)	353
3.2	FDTC SERIES (RCN-TC-24W-ER)	
3.3	EXCEPT FOR FDT AND FDTC SERIES (RCN-KIT3-E)	

- Fasten the wiring to the terminal securely and hold the cable securely so as not to apply unexpected stress on the terminal.
 - Loose connection or hold will cause abnormal heat generation or fire.
- Make sure the power supply is turned off when electric wiring work. Otherwise, electric shock, malfunction and improper running may occur.

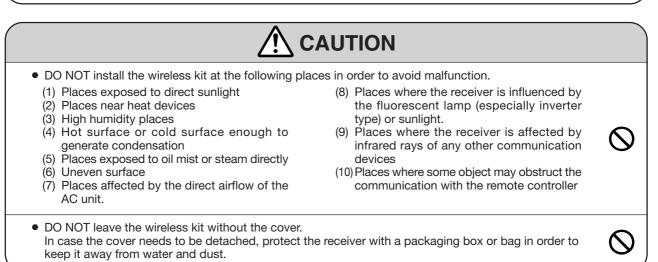

3.1 FDT SERIES

The FDT series is an exclusive series with all wired models. However, these models can also be used wireless units by using the optional wireless kit.

(1) Wireless kit model

Model	
RCN-T-36-W-E	

(2) Accessories

Please make sure that you have all of the following accessories.


Receiver	a contraction of the second se	1	Remote controller holder	Ĵ	1
Wireless remote controller	E	1	Wood screw for holder	OF	2
Parts set		1	AAA dry cell battery (RO3)	Ø)	2

(3) How to install the receiver

The receiver can be installed by replacing with a corner panel on the applicable decorative panel.

Preparation before installation

- ① Attach the decorative panel onto the air conditioner according to the installation manual for the panel.
- 2 Remove the air return grille.
- ③ Remove a corner panel located on the refrigerant pipes side.
- (4) Remove three screws and detach the cover (indicated as shadowed area) from the control box of the air conditioner.




Setting on site

① PCB on the receiver has the following switches to set the functions. Default setting is shown with 🗔 mark.

SW1	Customized signal setting to avoid mixed communication	ON: Normal OFF: Remote
SW2	Receiver master/slave setting	ON: Master OFF: Slave
SW3	Buzzer valid/Invalid	ON: Valid OFF: Invalid
SW4	Auto restart	ON:Valid OFF:Invalid

- 2 Remove the cover by unscrewing two screws from the back of receiver.
- ③ Change the setting by the switch on PCB.

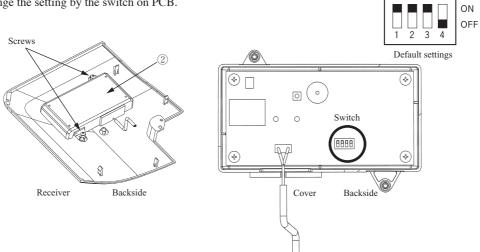

When SW1 is turned to OFF position, change the corresponding remote controller setting as follows:
 How to change the remote controller setting
 Pressing ACL and AIR FLOW button at the same time or inserting the


batteries with pressing AIR FLOW button will customize the signal.

Note

* When the batteries are removed, the setting will return to the default setting. Please make sure to reset it when the batteries are replaced.

Caution

Instruct the customer to set the mentioned above when replacing the batteries. (How to set is also mentioned in the user's manual attached on the air conditioner.)




Radio interference prevention mode

Installation of the receiver

- ① Loosen the bolts which fix the panel and make a gap between the panel and the indoor unit
- 2 Put the wiring of the receiver through the opening.
- ③ Put the wiring on the notch on the control box so as not to be pinched by the control box and lid as shown below.
- ④ Connect the wiring to the terminal block provided in the control box. (Non- polarized)
- (5) Attach the receiver to the panel according to the panel installation manual.
- (6) Fix the wiring with the clamp so that the wiring do not contact the edge of control box's metal sheet.
- (7) Reattach the control box lid with 3 screws removed.

*Note: Make sure the wires not to be pinched by any other parts like panel, control box and indoor unit.

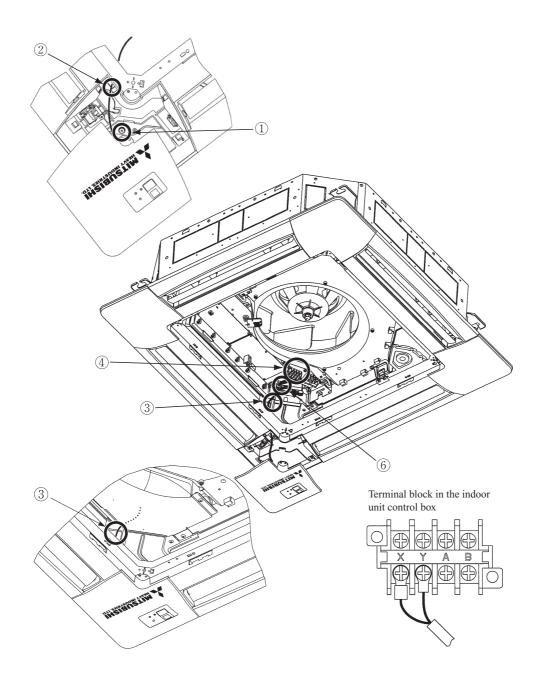


(4) Remote controller

Installation of the controller holder

Caution

- DO NOT install it on the following places
- 1. Places exposed to direct sunlight
- 2. Places near heat devices
- 3. High humidity places
- 4. Hot surface or cold surface enough to generate condensation
- 5. Places exposed to oil mist or steam directly.
- 6. Uneven surface




Installation tips for the remote controller holder

- · Adjust and keep the holder upright
- \cdot Tighten the screw to the end to avoid scratching the remote controller.
- \cdot DO NOT attach the holder on plaster wall.

How to insert batteries


- ① Detach the back lid.
- 2 Insert the batteries. (two AAA batteries)
- ③ Reattach the back lid.




Control plural indoor units with one remote controller

Up to 16 indoor units can be connected.

- ① Connect the XY terminal with 2-core wire. As for the size, refer to the following note.
- (2) For Packaged air conditioner series, set the indoor unit address with SW2 on the indoor unit PCB from [0] to [F] so as not to duplicate.

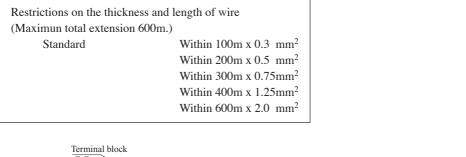



Master/Slave setting when using plural remote controllers

Up to two receivers can be installed in one indoor unit group.

When two receivers are used, it is necessary for a receiver to turn OFF SW2 on the receiver PCB to set it as slave.


(For the method of switching, please see **Setting on site** in the section of **How to install the receiver** in this manual.)

Wireless remote controller's operable area


① Standard reachable area of the signal

[condition] Illuminance at the receiver: 300lux

(when no lighting is installed within 1m of the receiver in an ordinary office.)



② Correlation between illuminance at the receiver and reachable area of the signal in a plain view. The drawing in the right shows the correlation between the reachable area of the signal and illuminance at the receiver when the remote controller is operated at 1.1m high under the condition of ceiling height of 2.5m. When the illuminance becomes double, the area is narrowed down to two thirds.




Installation tips when several receivers are installed close Minimum distance between the indoor units which can avoid cross communication is 5m under the condition of 300lux of illuminance at the receiver.
 (When no lighting is installed within 1m of the receiver in an ordinary office)

(5) Backup button

A Backup button is provided on the receiver.

Even when the operation from the wireless remote controller is not possible (due to flat batteries, controller lost, or controller failure), still it possible to operate as temporary means. Press the button directly when operating it.

- (a) The air conditioner starts the operation with the condition of Auto mode, 23°C of set point, High fan speed and horizontal louver position.
- (b) The air conditioner stops the operation when the button is pressed when in operation.



(6) Cooling test run operation

- After safety confirmation, turn on the power.
- Transmit a cooling operation command with wireless remote controller, while the backup button on the receiver is pressed.
- If the backup button on the receiver is pressed during a test run, it will end the test run.
- If you cannot operate the unit properly during a test run, please check by consulting with inspection guides on the wiring diagram of outdoor units.

(7) How to read the two-digit display

On the receiver of a wireless kit, a two-digit (7-segment) display is provided.

- (a) An indication will be displayed for one hour after power on.
- (b) An indication will be displayed for 3.5 seconds after transmitting a "STOP" command from the wireless remote controller or the operation of the backup button to stop the unit.
- (c) An indication appearing in (a) or (b) above will go off as soon as the unit starts operation.
- (d) When there are no error records to indicate, addresses of all the connected units are displayed.
- (e) When there are some error records remaining, the error records are displayed.
- (f) Error records can be cleared by transmitting a "STOP" command from the wireless remote controller, while the backup button is pressed.

3.2 FDTC SERIES

The FDTC series is an exclusive series with all wired models. However, these models can also be used wireless units by using the optional wireless kit.

(1) Wireless kit model

Model RCN-TC-24W-ER

(2) Accessories

Please make sure that you have all of the following accessories.


Receiver		1	Remote controller holder	P	1
Wireless remote controller	(Heil)	1	Wood screw for holder	Ø	2
Parts set		1	AAA dry cell battery (RO3)	۵	2

(3) How to install the receiver

The receiver can be installed by replacing with a corner panel on the applicable decorative panel.

Preparation before installation

- ① Attach the decorative panel onto the air conditioner according to the installation manual for the panel.
- (2) Remove the air return grille.
- ③ Remove a corner panel located on the refrigerant pipes side.
- 4 Remove to screws and detach the lid from the control box of the air conditioner.

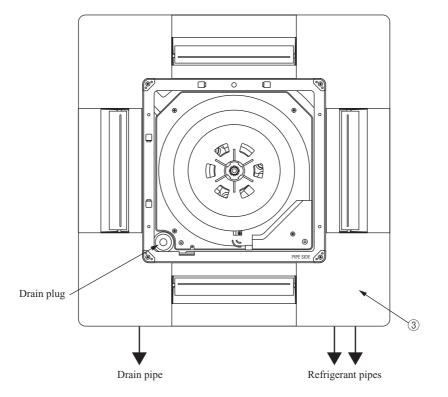


Setting on site

① PCB on the receiver has the following switches to set the functions. Default setting is shown with 🗔 mark.

SW1	Customized signal setting to avoid mixed communication	ON: Normal OFF: Remote
SW2	Receiver master/slave setting	ON: Master OFF: Slave
SW3	Buzzer valid/Invalid	ON: Valid OFF: Invalid
SW4	Auto restart	ON:Valid OFF:Invalid

- 2 Remove the cover by unscrewing two screws from the back of receiver.
- ③ Change the setting by the switch on PCB.

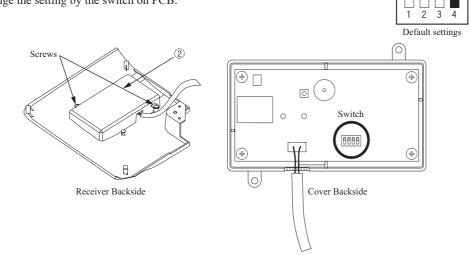

④ When SW1 is turned to OFF position, change the corresponding remote controller setting as follows:

How to change the remote controller setting


Pressing ACL switch with AIR FLOW button kept pressing or inserting the batteries with pressing AIR FLOW button will customize the signal.

Note

* When the batteries are removed, the setting will return to the default setting. Please make sure to reset it when the batteries are replaced.

Caution

Instruct the customer to set the mentioned above when replacing the batteries.(How to set is also mentioned in the user's manual attached on the air conditioner.)



ON


OFF

Radio interference prevention mode

Installation of the receiver

- ① Attach the receiver to the panel according to the panel installation manual.
- 2 Remove two screws and detach the lid from the control box.
- ③ Put the wiring in the control box with other wiring as shown below.
- ④ Connect the wiring to the terminal block (X, Y) provided in the control box. (Non- polarized)
- (5) Fix the wiring with the clamp as shown below.
- 6 Reattach the control box lid with 2 screws removed.

* Note: Make sure wires not to be pinched by any other parts like panel and control box.

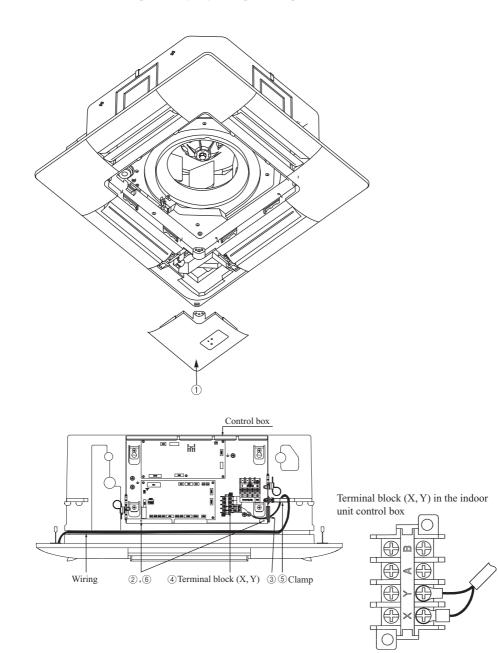


(4) Remote controller

Installation of the controller holder

Caution

- Do not install it on the following places
- 1. Places exposed to direct sunlight
- 2. Places near heat devices
- 3. High humidity places
- 4. Hot surface or cold surface enough to generate condensation
- 5. Places exposed to oil mist or steam directly.
- 6. Uneven surface




Holder for remote controller

Installation tips for the remote controller holder

- · Adjust and keep the holder upright
- \cdot Tighten the screw to the end to avoid scratching the remote controller.
- \cdot Do not attach the holder on plaster wall.

How to insert batteries


- ① Detach the back lid
- 2 Insert the batteries. (two AAA batteries)
- (3) Reattach the back lid.




Control plural indoor units with one remote controller

Up to 16 indoor units can be connected.

- ① Connect the XY terminal with 2-core wire. As for the size, refer to the following note.
- (2) For signal packaged air conditioner series, set the indoor unit address with SW2 on the indoor unit PCB from [0] to [F] so as not to duplicate.

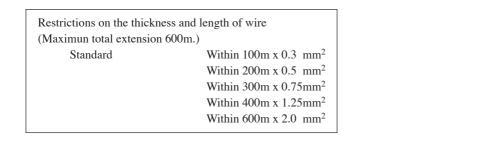

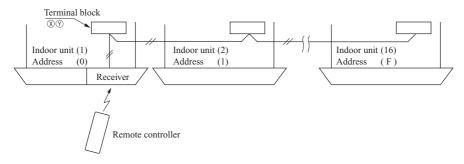

Master/Slave setting when using plural remote controllers

Up to two receivers can be installed in one indoor unit group.

When two receivers are used, it is necessary for a receiver to turn OFF SW2 on the receiver PCB to set it as slave.


(For the method of switching, please see **Setting on site** in the section of **How to install the receiver**) in this manual.)

Wireless remote controller's operable area


① Standard reachable area of the signal

[condition] Illuminance at the receiver: 300lux

(when no lighting is installed within 1m of the receiver in an ordinary office.)



② Correlation between illuminance at the receiver and reachable area of the signal in a plain view. The drawing in the right shows the correlation between the reachable area of the signal and illuminance at the receiver when the remote controller is operated at 1m high under the condition of ceiling height of 2.4m.




Installation tips when several receivers are installed close Minimum distance between the indoor units which can avoid cross communication is 5m under the condition of 300lux of illuminance at the receiver.
 (When no lighting is installed within 1m of the receiver in an ordinary office)

(5) Backup button

A Backup button is provided on the receiver. Even when the operation from the wireless remote controller is not possible (due to flat batteries, controller Iost, or controller failure), still it possible to operate as temporary means. Press the button directly when operating it.

- (a) The air conditioner starts the operation with the condition of Auto mode, 23°C of set point, High fan speed and horizontal louver position.
- (b) The air conditioner stops the operation when the button is pressed when in operation.



(6) Cooling test run operation

- After safety confirmation, turn on the power.
- Transmit a cooling operation command with wireless remote controller, while the backup button on the receiver is pressed.
- If the backup button on the receiver is pressed during a test run, it will end the test run.
- If you cannot operate the unit properly during a test run, please check by consulting with inspection guides on the wiring diagram of outdoor units.

(7) How to read the two-digit display

On the receiver of a wireless kit, a two-digit (7-segment) display is provided.

- (a) An indication will be displayed for one hour after power on.
- (b) An indication will be displayed for 3.5 seconds after transmitting a "STOP" command from the wireless remote controller or the operation of the backup button to stop the unit.
- (c) An indication appearing in (a) or (b) above will go off as soon as the unit starts operation.
- (d) When there are no error records to indicate, addresses of all the connected units are displayed.
- (e) When there are some error records remaining, the error records are displayed.
- (f) Error records can be cleared by transmitting a "STOP" command from the wireless remote controller, while the backup button is pressed.


3.3 EXCEPT FOR FDT & FDTC SERIES

This product is dedicated for heat pump unit. Never install on the unit dedicated for cooling.

(1) Wireless kit model



(2) Accessories (Confirm the following accessories).

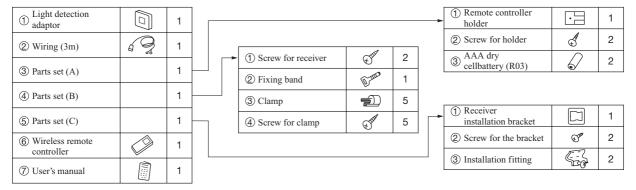


(3) Wireless remote controller's operable area


(a) When installed on ceiling

① Standard reachable area of the signal

[Condition] Illuminance at the receiver : 300lux (when no lighting is installed within 1m of the receiver in an ordinary

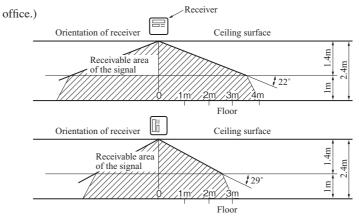

- ② Correlation between illuminance at the receiver and reachable area of the signal in a plain view.
 - [Condition] Correlation between the reachable area of the signal and illuminance at the receiver when the remote controller is operated at 1.1m high under the condition of ceiling height of 2.5m.When the illuminance becomes double, the area is narrowed down to two third.

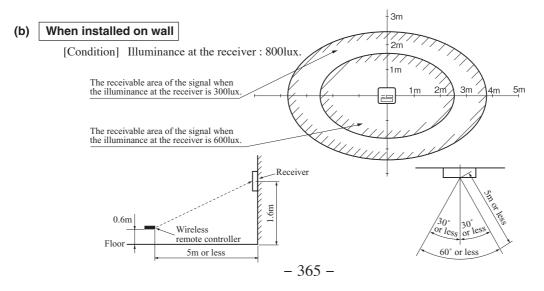

(4) How to install the receiver

The following two methods can be used to install the receiver onto a ceiling or a wall.

Select a method according to the installation position.

<Installation position>

- ① Direct installation onto the ceiling with wood screws.
- (2) Installation with accessory's bracket

(a) Drilling of the ceiling (ceiling opening)

Drill the receiver installation holes with the following dimensions at the ceiling position where wires can be connected.




(b) Wiring connection of receiver

Caution

Do not connect the wiring to the power source of the terminal block.

If it is connected, printed board will be damaged.




(c) Installation of the receiver

Remove the screw on the side of the receiver and sprit it into the upper case and lower case. Install the receiver with one of the two installation methods (A) or (B) shown below.

(A) Direct installation onto the ceiling with screws


Use this installation method when the ceiling is wooden, and there is no problem for strength in installing directly with wood screws.

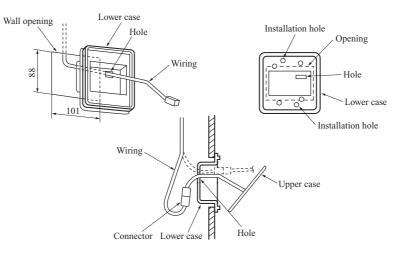

- ① Put through the wiring from the back side to the hole of the lower case.
- ② Fit the lower case into the ceiling opening. Make sure that the clearance between the convex part of the back of the lower case and the ceiling opening must be as equal as possible on both sides.
- ③ Using the two installation holes shown above, fix the lower case onto the ceiling with the enclosed wood screws. (The other four holes are not used.)
- ④ Connect the wiring with the wiring from the upper case by the connector.
- (5) Take out the connector to the backside from the hole of the lower case putting through the wiring at (1).
- (6) Fit the upper case and the lower case, and tighten the screws.

(B) Installation with enclosed bracket

 \triangleright Use this method when installaing onto a gypsum board (7 to 18mm), etc.

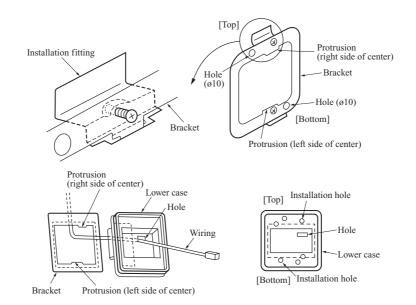


- Catch the two protrusion of the enclosed bracket onto the fitting as shown above, and temporarily fix with the screws.
 (The bracket has an up/down and front/back orientation. Confirm the top/bottom protrusion positions and the positional relation of the ø 10 holes on the bracket and the installation hole on the lower case with the above drawing.)
- ② Insert the end of the installation fitting into the back of the ceiling from the opening, and tighten the screws to fix the bracket onto the ceiling.
- ③ Pass the wiring from the rear side through the hole on the lower case.
- ④ Fit the lower case onto the bracket, and fix the lower case to the bracket using the two installation holes shown above.(The other four holes are not used.)
- (5) Follow step (1) to (6) for (A) to complete the installation.

(5) Remote controller

Installation of the controller holder

Caution

- Do not install it on the following places
- 1. Places exposed to direct sunlight
- 2. Places near heat devices
- 3. High humidity places
- 4. Hot surface or cold surface enough to generate condensation
- 5. Places exposed to oil mist or steam directly
- 6. Uneven surface




Installation tips for the remote controller holder

- Adjust and keep the holder upright.
- Tighten the screw to the end to avoid scratching the remote controller.
- Do not attach the holder to plaster wall.


How to insert batteries

- \bigcirc Detach the back lid.
- 2 Insert the batteries. (two AAA batteries)
- ③ Reattach the back lid.



(6) Cooling test run operation

- After safety confirmation, turn on the power.
- Transmit a cooling operation command with wireless remote controller, while the backup button on the receiver is pressed.
- If the backup button on the receiver is pressed during a test run, it will end the test run.
- If you cannot operate the unit properly during a test run, please check by consulting with inspection guides on the wiring diagram of outdoor units.



(7) Setting of wireless remote controller and receiver

(A) Methods of avoiding the malfunction due to the mixed communication

Do both procedures (1) and (2).

This setting is to avoid the mixed communication with other household electric appliances or the mixed communication when two receivers are located closely.

① Setting change of the wireless remote controller

Pressing ACL and AIRFLOW button at the same time or inserting the batteries with pressing AIRFLOW button will customize the signal.


Note *When the batteries are removed, the setting will return to the default setting. Make sure to reset it when the batteries are replaced.


② Setting the PCB of the receiver

Turn SW1-1 off.

• Wireless remote controller

• PCB of the receiver



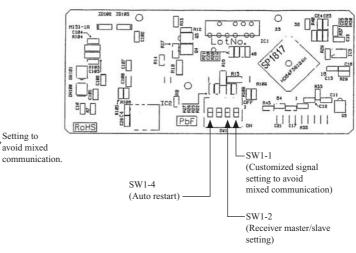

SW1-1	Customized signal setting to avoid mixed communication	ON : Normal OFF: Remote
SW1-2	Receiver master/slave setting	ON : Master OFF: Slave
SW1-4	Auto restart	ON : Valid OFF: Invalid
		: Default setting

(B) Control plural indoor units with one remote controller


Up to 16 indoor units can be connected.

- Connect the XY terminal with 2-core wire. As for 1 the size, refer to the following note.
- For Packaged air conditioner series, set the indoor (2) unit address with SW2 on the indoor unit PCB from [0] to [F] so as not to duplicate.

Restrictions on the thickness and length of wire (Maximun total extension 600m.) Within 100m x 0.3 mm²


Standard

Within 200m x 0.5 mm^2 Within 300m x 0.75mm^2 Within 400m x 1.25mm^2 Within $600m \ x \ 2.0 \ mm^2$

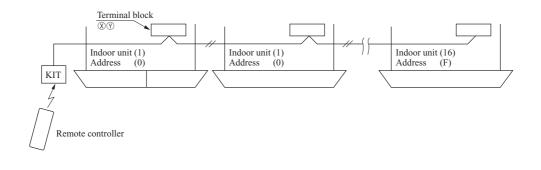

(C) Master/Slave setting when using plural remote controller

Up to two receivers can be installed in one indoor unit group.



Switch	Setting	Function
SW1-2	ON	Master
SW1-2	OFF	Slave

PACKAGED AIR-CONDITIONER

MULTI-TYPE (V-MULTI) PACKAGED AIR-CONDITIONER



Air-Conditioning & Refrigeration Systems Headquarters 16-5, 2-chome, Kounan, Minato-ku, Tokyo, 108-8215, Japan Fax : (03) 6716-5926

> updated 10,June,2008 25,June,2008 10,July,2008