


(2) Ceiling cassette-4 way compact type (FDTC)

All models

(a) Honeycomb type

Symbol	Model	Content
A	Gas piping	15,22,28 φ 9.52 (3/8") (Flare) φ 12.7 (1/2") (Flare)
B	Liquid piping	φ 6.35 (1/4") (Flare)
C	Drain piping	VP25 (O.D.32)
D1	Power source connection	
D2	Remote control code and signal wiring connection	
F	Suspension bolts	(M10 or M8)
G	Outside air opening for ducting	(Knock out)
H	Air outlet opening for ducting	φ 125 (Knock out)
J	Inspection opening	450×450

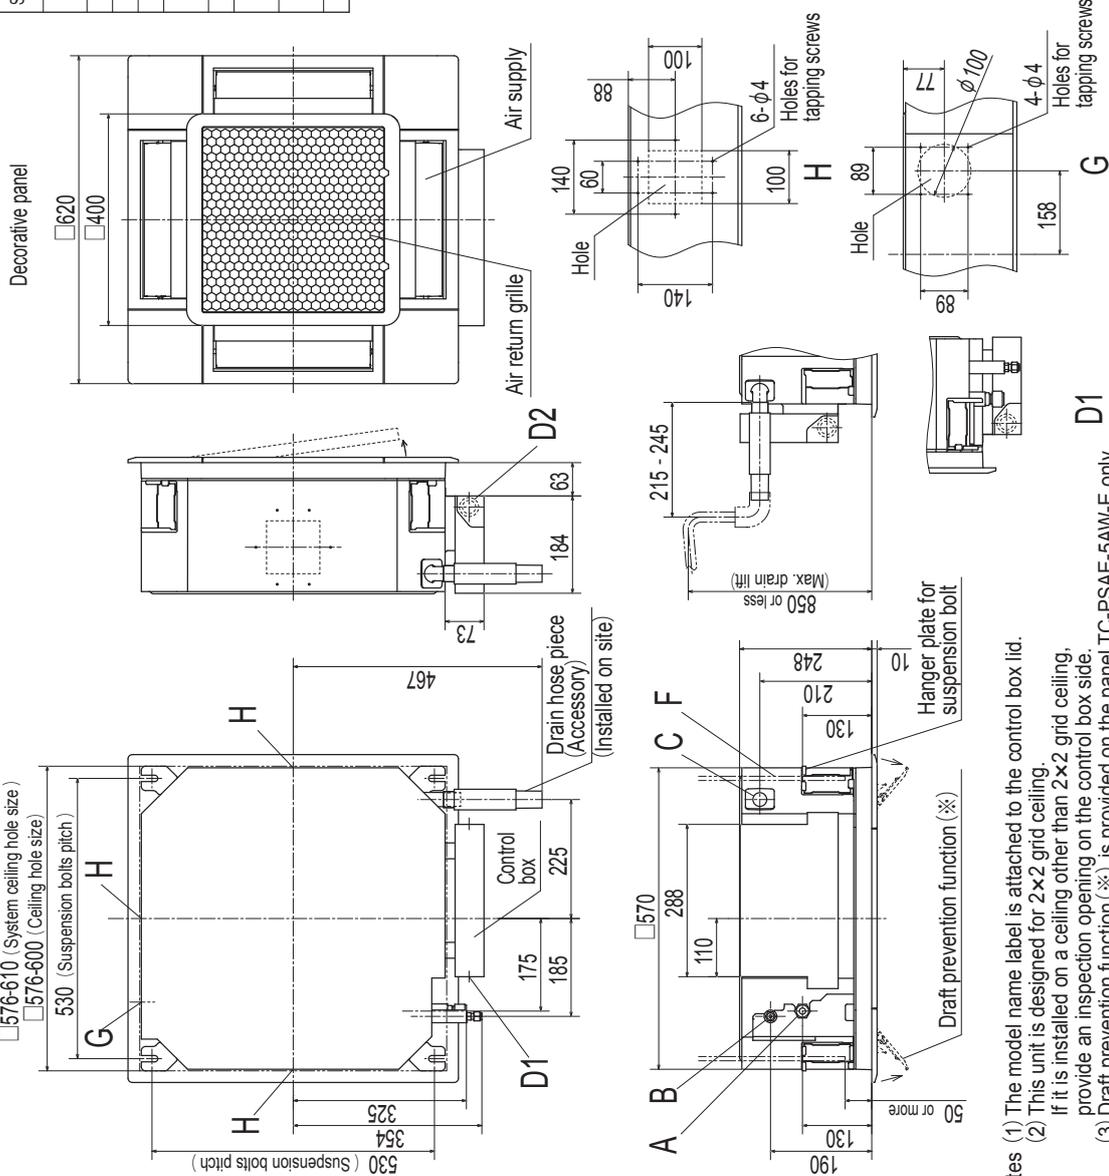

Unit: mm


Panel model name
TC-PSA-5AW-E
TC-PSAE-5AW-E

- Notes
- (1) The model name label is attached to the control box lid.
 - (2) This unit is designed for 2x2 grid ceiling. If it is installed on a ceiling other than 2x2 grid ceiling, provide an inspection opening on the control box side.
 - (3) Draft prevention function (※) is provided on the panel TC-PSAE-5AW-E only.

PJF000Z762

(b) Grid type

Symbol	Model	Content
A	Gas piping φ9.52 (3/8") (Flare) φ12.7 (1/2") (Flare)	15, 22, 28 36, 45, 56
B	Liquid piping φ6.35 (1/4") (Flare)	
C	Power source connection Remote control code and signal wiring connection	VP25 (O.D.32)
D1	Suspension bolts (M10 or M8)	
D2	Outside air opening for ducting (Knock out)	
F	Air outlet opening for ducting φ125 (Knock out)	
H	Inspection opening	450 × 450
J		

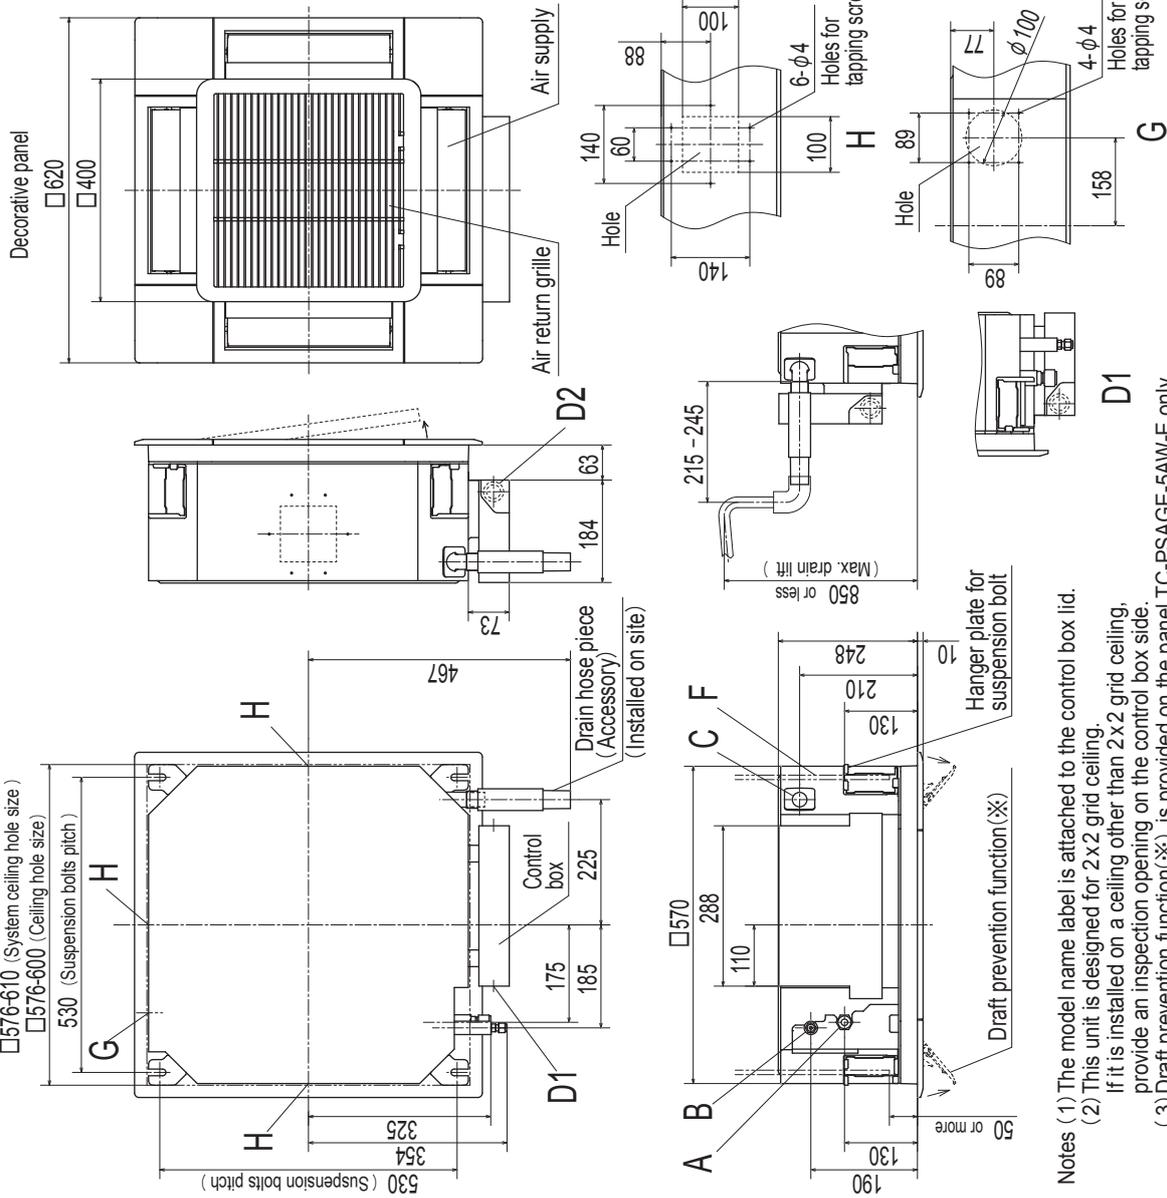

Unit:mm

Panel model name
TC-PSAG-5AW-E
TC-PSAGE-5AW-E

- Notes (1) The model name label is attached to the control box lid.
 (2) This unit is designed for 2x2 grid ceiling.
 If it is installed on a ceiling other than 2x2 grid ceiling, provide an inspection opening on the control box side.
 (3) Draft prevention function(※) is provided on the panel TC-PSAGE-5AW-E only.

PJF000Z764